

Features

- Premium stainless steel roller design allows for effortless opening and closing of the moving panel
- Controlled Close® innovative soft-close with double-dampening technology eliminates slamming and brings door to a secure close
- Removable center guide for easy cleaning of surrounding surfaces and bottom threshold
- Frameless design emphasizes glass and creates a sleek, minimalist look
- Back-to-back 15-1/8" (384 mm) vertical handles
- Tempered glass ensures enhanced safety and durability
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Smooth, easy-to-clean wall jambs
- Shower door configuration consists of one sliding panel and one stationary panel
- Coordinates with other products in the Premise™ collection

Material

- Frameless, heavy 5/16" (8 mm) thick Crystal Clear tempered glass with frosted privacy band
- Anodized aluminum prevents rust and corrosion

Installation

- Fits opening widths 56-5/8" – 59-5/8" (1438 –1514 mm)
- 76-1/8" (1934 mm) high, with a lofty 74-7/16" (1891 mm) minimum head clearance
- 3" (76.2 mm) width adjustment
- 3/8" (10-mm) out-of-plumb adjustability on each side simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- For residential use only
- Not for use in hospitality



Codes/Standards


ANSI Z97.1
CAN/CGSB-12.1
CPSC 16CFR 1201

KOHLER® Bath and Shower Doors Ten-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	BNK	Anodized Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass


Available Glass Options

Code	Description
G81	Crystal Clear with Frosted Privacy Band



Premise™

76" H sliding shower door with 5/16"-thick glass
K-702471-8G81

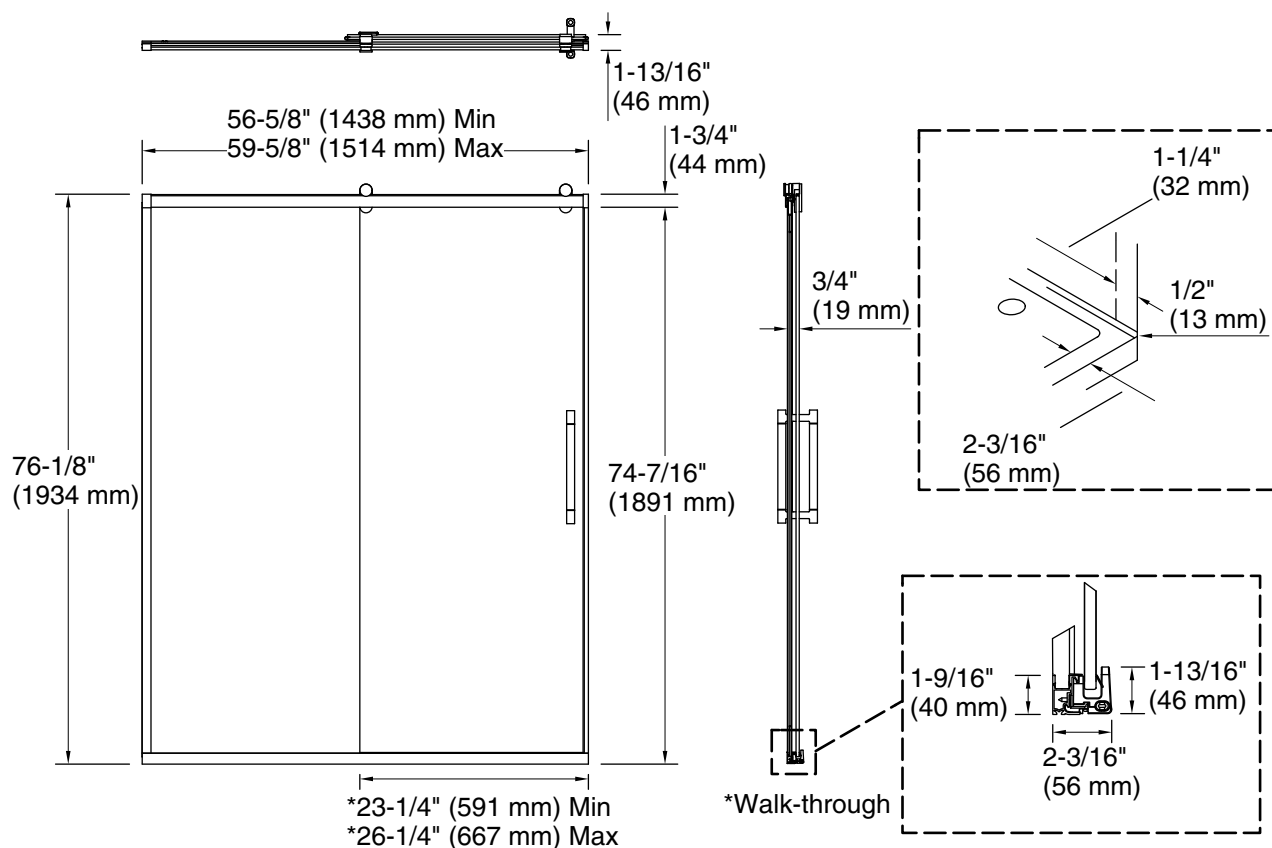

Technical Information

All product dimensions are nominal.

Base-To-Wall	1/2" (13 mm)
Radius – Max:	
Shower Ledge Min	2-3/16" (56 mm)
Flat:	
Shower Wall Min	1-1/4" (32 mm)
Flat:	

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 79-1/16" (2008 mm) to allow for installation clearance.