



Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

## GLASS DOOR MERCHANDISER, LARGE STORAGE CAPACITY REFRIGERATORS

MODEL: ☐ MXGDM-30RBHC ☐ MXGDM-50RBHC ☐ MXGDM-73RBHC



MXGDM-30RBHC



MXGDM-50RBHC



MXGDM-73RBHC




Maxx Cold Glass Door Merchandiser Large Storage Capacity Refrigerators are designed for durability and visual appeal to display your product. The glass door merchandisers are energy efficient and effective at displaying and regulating the right temperature to preserve freshness and prolong shelf life of on-the-go & beverage products. Simple-to-use, programmable solid-state digital controls deliver accurate temperature regulation.

### FEATURES AND CONSTRUCTION

- Constructed of a powder coated steel black exterior and white interior
- Low-e double pane glass doors
- Bottom mounted compressor
- Four (4) adjustable heavy-duty PE-coated wire shelves per door, include pricing strips
- Four (4) rollers (2 with leveling feet) - 1 Door & 2 Door models
- Six (6) rollers (3 with leveling feet) - 3 Door models
- Electronic thermostat and digital LED temperature display provide accurate and easy reading
- Self-closing doors are provided with lock and key set for security
- Magnetic gasket can be replaced without tools
- CFC free refrigerant and foam
- Automatic defrost system, equipped with integrated condensate pan therefore no drain line connection is needed

### ELECTRIC

115V / 60Hz / 1Ph  
6' (2m) power cord set included



NEMA 5-15P

### NOMINAL STORAGE CAPACITY

MXGDM-30RBHC ..... 30 Cu Ft (850 L)

MXGDM-50RBHC ..... 50 Cu Ft (1416 L)

MXGDM-73RBHC ..... 73 Cu Ft (2067 L)

### TEMPERATURE

Holding temperature ..... 33°F to 41°F (1°C to 5°C)

- Oversized refrigeration system delivers optimum storage temperature and rapid temperature recovery

### 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471




Zero Ozone Depletion Potential


### MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at  
TechnicalServices@TheLegacyCompanies.com or 877.368.2797

MXGDM-30RBHC



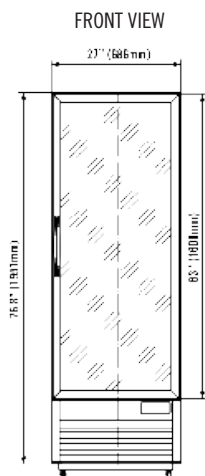


TOP VIEW





SIDE VIEW  
(ALL MODELS)

MXGDM-50RBHC

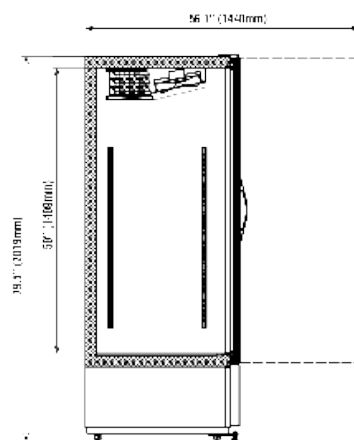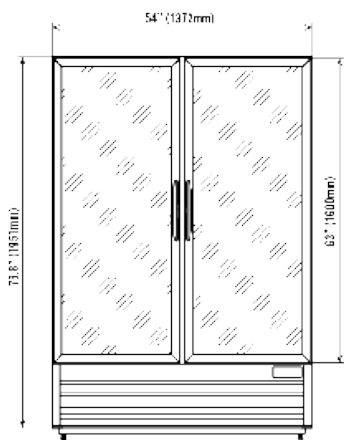

MXGDM-73RBHC

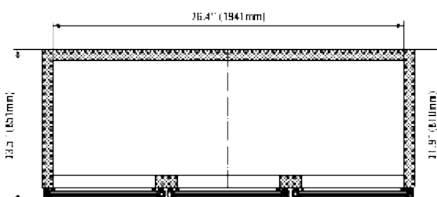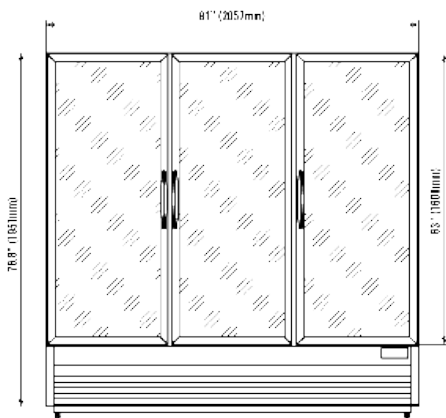

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MXGDM-30RBHC	27" x 33.5" x 79.5" (686 x 851 x 2019 mm)	22" x 26.5" x 52.25" (559 x 673 x 1327 mm)	30 Cu Ft (850 L)	33°F to 41°F (1°C to 5°C)	3.0A	331 lbs (151 kg)	R-290A 3.0 oz (85 g)	1 Swing / 4 Shelves	115V / 60Hz / 1Ph
MXGDM-50RBHC	54" x 33.5" x 79.5" (1372 x 851 x 2019 mm)	49.4" x 26.5" x 52.25" (1255 x 673 x 1327 mm)	50 Cu Ft (1416 L)	33°F to 41°F (1°C to 5°C)	4.5A	540 lbs (245 kg)	R-290A 3.7 oz (105 g)	2 Swing / 8 Shelves	115V / 60Hz / 1Ph
MXGDM-73RBHC	81" x 33.5" x 79.5" (2057 x 851 x 2019 mm)	76.4" x 26.5" x 52.25" (1941 x 673 x 1327 mm)	73 Cu Ft (2067 L)	33°F to 41°F (1°C to 5°C)	7.0A	741 lbs (337 kg)	R-290A 5.29 oz (150 g)	3 Swing / 12 Shelves	115V / 60Hz / 1Ph

## INSTALLATION

- Units are equipped with roller wheels and leveling feet.
- Door Handles are removable if unit is needed to fit through a 32" width door frame.