Tete-A-Tete Bar Height Adirondack Chairs

Assembly Instructions

A041-016-001

Important - Please read these instructions fully before starting assembly

HASSLE-FREE WARRANTY

We stand behind the quality of our products. For full warranty policy, email: poly@homeselecting.com




Components

If you need help or have damaged or missing parts,

please email: poly@homeselecting.com


Please check you have all the components listed below.

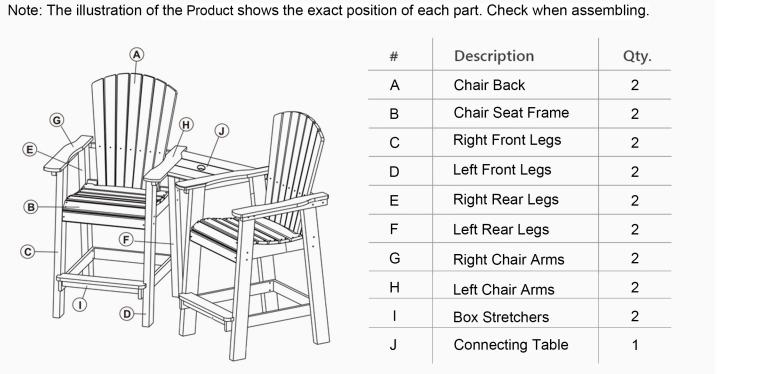

Hardware & Tools

" Hex Key (Included)

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than required.

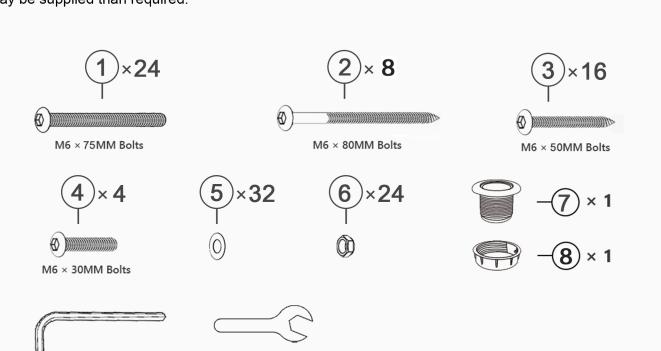


Wrench (Included)


Assembly Instructions

If you need help or have damaged or missing parts, please email: poly@homeselecting.com

▲ Caution: Please do not over-tighten bolts and screws during assembly.



- Place all chair parts on a soft and smooth surface to prevent scretching.
- Attach "Front Legs (C/D)" to "Chair Seat Frame (B)" - Using "① M6 × 75MM Bolts & Washer & Nut", tighten with hex key and wrench.
- •Attach "Rear Legs (E/F)" to "Chair Seat Frame (B)" - Using "① M6 × 75MM Bolts & Washer & Nut", tighten with hex key and wrench.

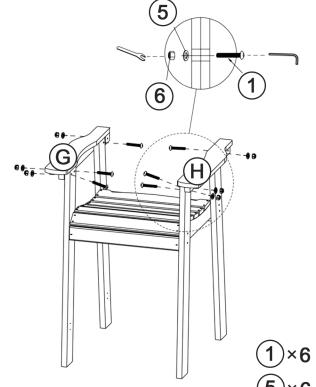

1)×6 5)×6 6)×6

 Attach "Chair Arms (G/H)" to "Legs (C/D/E/F)" - Using "① M6 × 75MM Bolts & Washer & Nut", tighten with hex key and wrench.

(3)×8

Assembly Instructions

⚠ Caution: Please do not over-tighten bolts and screws during assembly.

STEP 4

 Attach "Box Stretchers (I)" to Legs (C/D/E/F)" - Using "3 M6 × 50MM Bolts", tighten with hex key.

If you need help or have damaged or missing parts,

• Attach "Chair Back (A)" to "Chair Arms

• Attach "Chair Back (A)" to "Rear Legs

(E/F)" - Using "2 M6 × 80MM Bolts",

(G/H)" - Using "2 M6 × 80MM Bolts",

tighten with hex key.

tighten with hex key.


please email: poly@homeselecting.com

 Repeat the step 1 to step 4 to assemble the second bar chair.

Assembly Instructions

If you need help or have damaged or missing parts, please email: poly@homeselecting.com

▲ Caution: Please do not over-tighten bolts and screws during assembly.

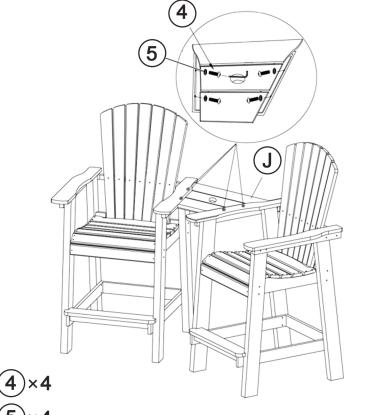

- ●Attach "Connecting Table (J)" to "Chair Arms" to connect 2 bar chairs - Using "4" M6 × 30MM Bolts & Washer", tighten with
- •The convenient connecting table can be detached at any time if you wish to move the Adirondacks bar chairs.base. the unit or your floor.

Warnings

If you need help or have damaged or missing parts, please email: poly@homeselecting.com

separate them into their groups.

Important - Please read these instructions fully before starting assembly

on the page 2. Remove all fittings from the plastic bags and

Keep children and animals away from the work area, small parts may cause choking if swallowed.

Make sure you have enough space to layout the parts before starting.

Assemble on a soft level surface to avoid damaging

Check you have all the components and tools listed Do not stand or put weight on the product, this could cause damage.

Assemble the item as close to its final position (in the

same area) as possible. Do not place furniture directly in front of radiators,

fires, or any other source of heat.




The assembly will be easier with 2 people while 1 person could also do the job.



specific installation videos.

Cleaning & Maintenance

- •Clean the product with a solution of mild soap and water. Dip a soft cloth or sponge into the solution and wipe down the entire surface.
- •After cleaning, thoroughly rinse the furniture with water to remove any remaining soap residue.
- •When not in use, cover the product with a protective cover to keep it clean and prolong its

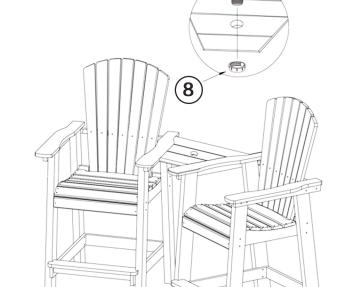

• Using the "7 and 8" to seal the hole on "Connecting Table (J)" - This is an umbrella hole suitable for most of patio umbrella, you could unseal it to attatch patio umbrella.