



Two-piece elongated toilet with skirted trapway, 1.28

K-5310

### **Features**

- Two-piece design
- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Left-hand Polished Chrome trip lever
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- Combination consists of the K-5309 bowl and the K-4369 tank
- Coordinates with other products in the Cimarron collection
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Eligible for consumer rebates in some municipalities
- 1.28 gpf (4.8 lpf)
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural powerful reducing cascade of water to increase the power and effectiveness of the flush

### Installation

- Standard 12" (305 mm) rough-in; 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Seat and supply line sold separately

## **Recommended Products/Accessories**

K-4108 PureWash® E750 Elongated bidet toilet seat with remote control

K-7637 Angle Supply with Stop (single)

K-5383 10" Rough-in Full Skirt Trap and Attachment System K-5381 14" Rough-in Full Skirt Trap and Attachment System

K-9466-L Left-Hand Trip Lever

K-5588 Purefresh® Deodorizing elongated toilet seat

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-23726 Drain treatment

K-26801 Impro® ReadyLatch® Quiet-Close™ elongated toilet seat

K-4636-RL Cachet® ReadyLatch® Quiet-Close™ elongated toilet seat

### **Included Components**

K-5309 Elongated toilet bowl with skirted trapway K-4369 Toilet tank, 1.28 gpf





### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1

ICC/ANSI A117.1 CSA B651 OBC

IAPMO Certification

# KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	7	Black Black <sup>™</sup>








Two-piece elongated toilet with skirted trapway, 1.28 gpf

K-5310

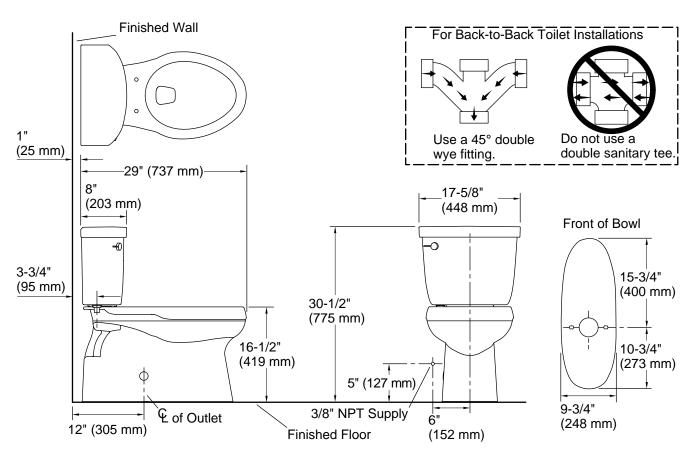

# **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: AquaPiston
Trap passageway: 2-1/8" (54 mm)

Water surface size: 9-5/8" x 6-5/8" (244 mm x 168 mm)

Rim to water 6-3/8" (163 mm)

surface:

Rough-in: 12" (305 mm)

# Fixture Supply Requirements

Min static pressure: 15 psi (103.4 kPa)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

