


UNDERCOUNTER GLASSWASHER

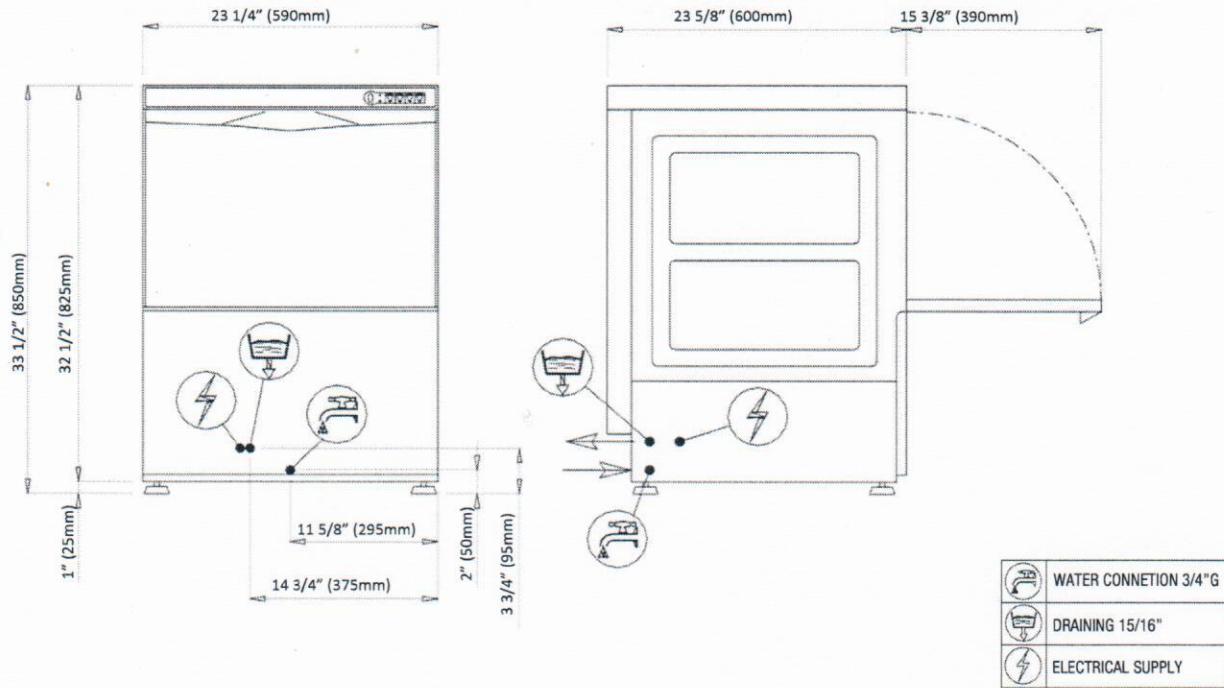

Inches: External Dimensions W x D x H	23.25" x 23.625" x 33.5"
mm: External Dimensions W x D x H	590 x 600 x 850 mm
Weight	124 lbs (56.25 kg)
Inlet Water Pressure/Flow Pressure	25 – 60 PSI / 15-25 PSI
Plates Diameter	13.625" (345mm)
Dishes Max Height	12.5" (317.5mm)
Rack Dimension	20" x 20" (508mm x 508mm)
Washing Cycles	1 (120 seconds) 2 (180 seconds)
Water Supply 131°F (55°C)	30 / 20 racks/h(*)
Water Supply 50°F (10°C)	21 / 20 racks/h(*)
Water Consumption / Cycle	0.60 gallon (2.27 L) water pressure 200kPa
Booster Capacity	1.5 gallons (5.68 L)
Booster Heating Element	4500W
Rinsing Temperature (set)	185°F (85°C)
Tank Capacity	7.6 (28.77 L)
Tank Heating Element	2700W
Wash Temperature (set)	155°F (68°C)
Pump Power	0.87HP/650 W (89.8 gal/(US)/min****)

*** Maximum Flow Rate

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.