


User Manual

CEILING FAN

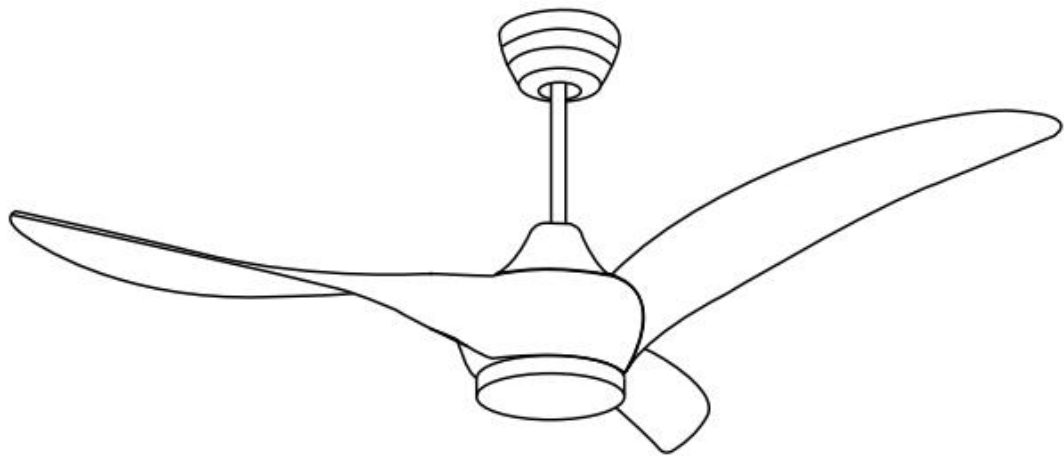

MODEL NO. : 52-8031

NOTE


If you found the Damaged Accessories, please contact us for Free Replacement.

Components and parts verification

Before you installation, please checking the parts one by one as below:



Hanging bracket



Down rod (4in & 8in)




Hanging cup




Bottom decorative cup



Blade




Motor



Lamp Base



Lampshade



Signal receiver



Hardware
expansion screws



Wiring caps




Screws



Pair of gloves



Remote controller





Light Source

Note : Before installing the ceiling fan, make sure that the power has been turned off.

Choose a way to install the hanging bracket


Fig. 1 Install on the wooden ceiling with screws passing through small 4 holes.

Fig. 2 Install on the concrete ceiling, with screws passing through middle 2 holes.

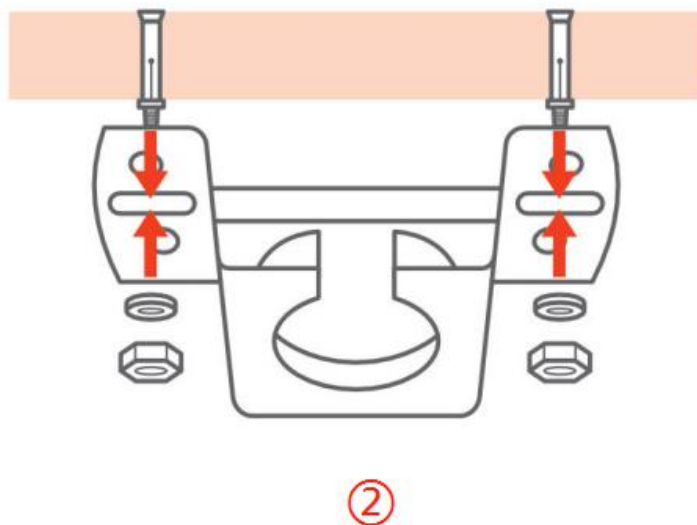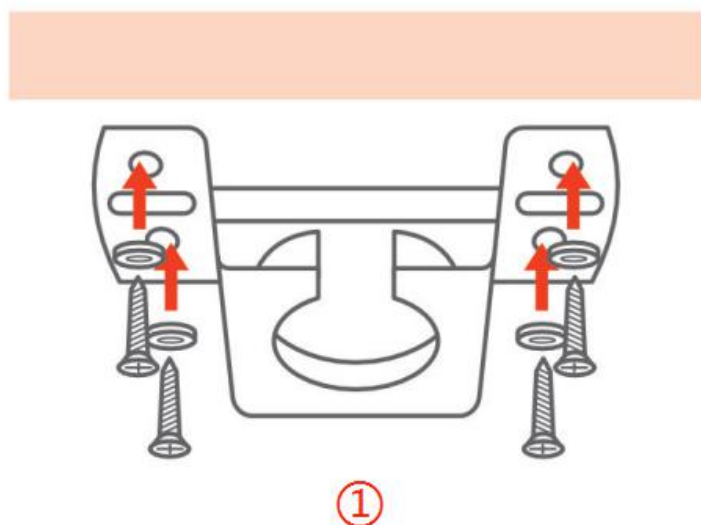


Install the lamp base

Unscrew the hex nut reserved at the motor, take out the lamp base and insert it into the motor, and fix it tightly with the hex nut..

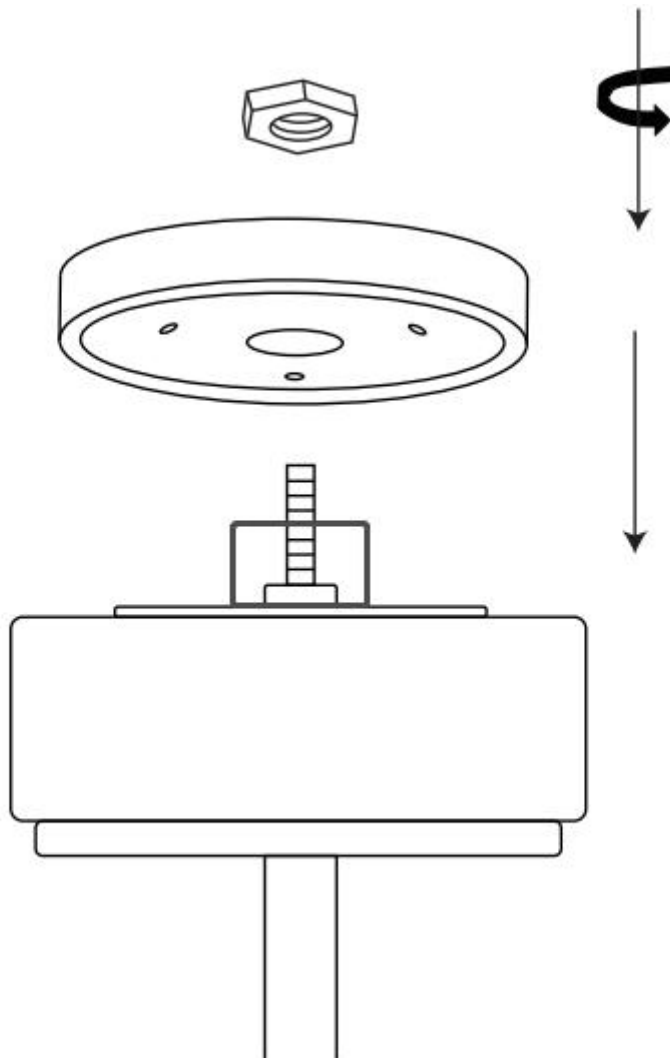


Connect the light source

Insert the reserved terminal of the motor and the light source terminal in place, then keep the light source and the chassis hole in place, then take out the three smallest screws, and finally fix the light source on the chassis with a screwdriver.

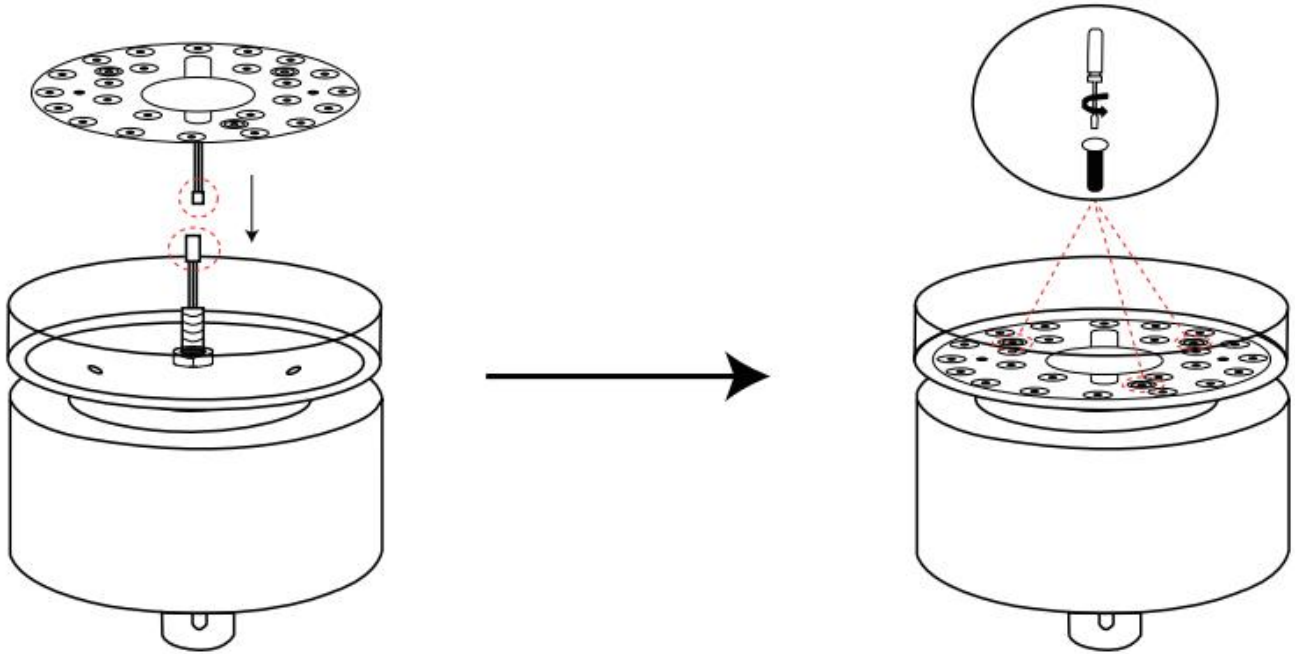

Install the blades

Take out the screws on the motor, first fix the fan blade heads one by one, and then fix the next screw one by one to ensure that all three fan blades are tightly fixed.



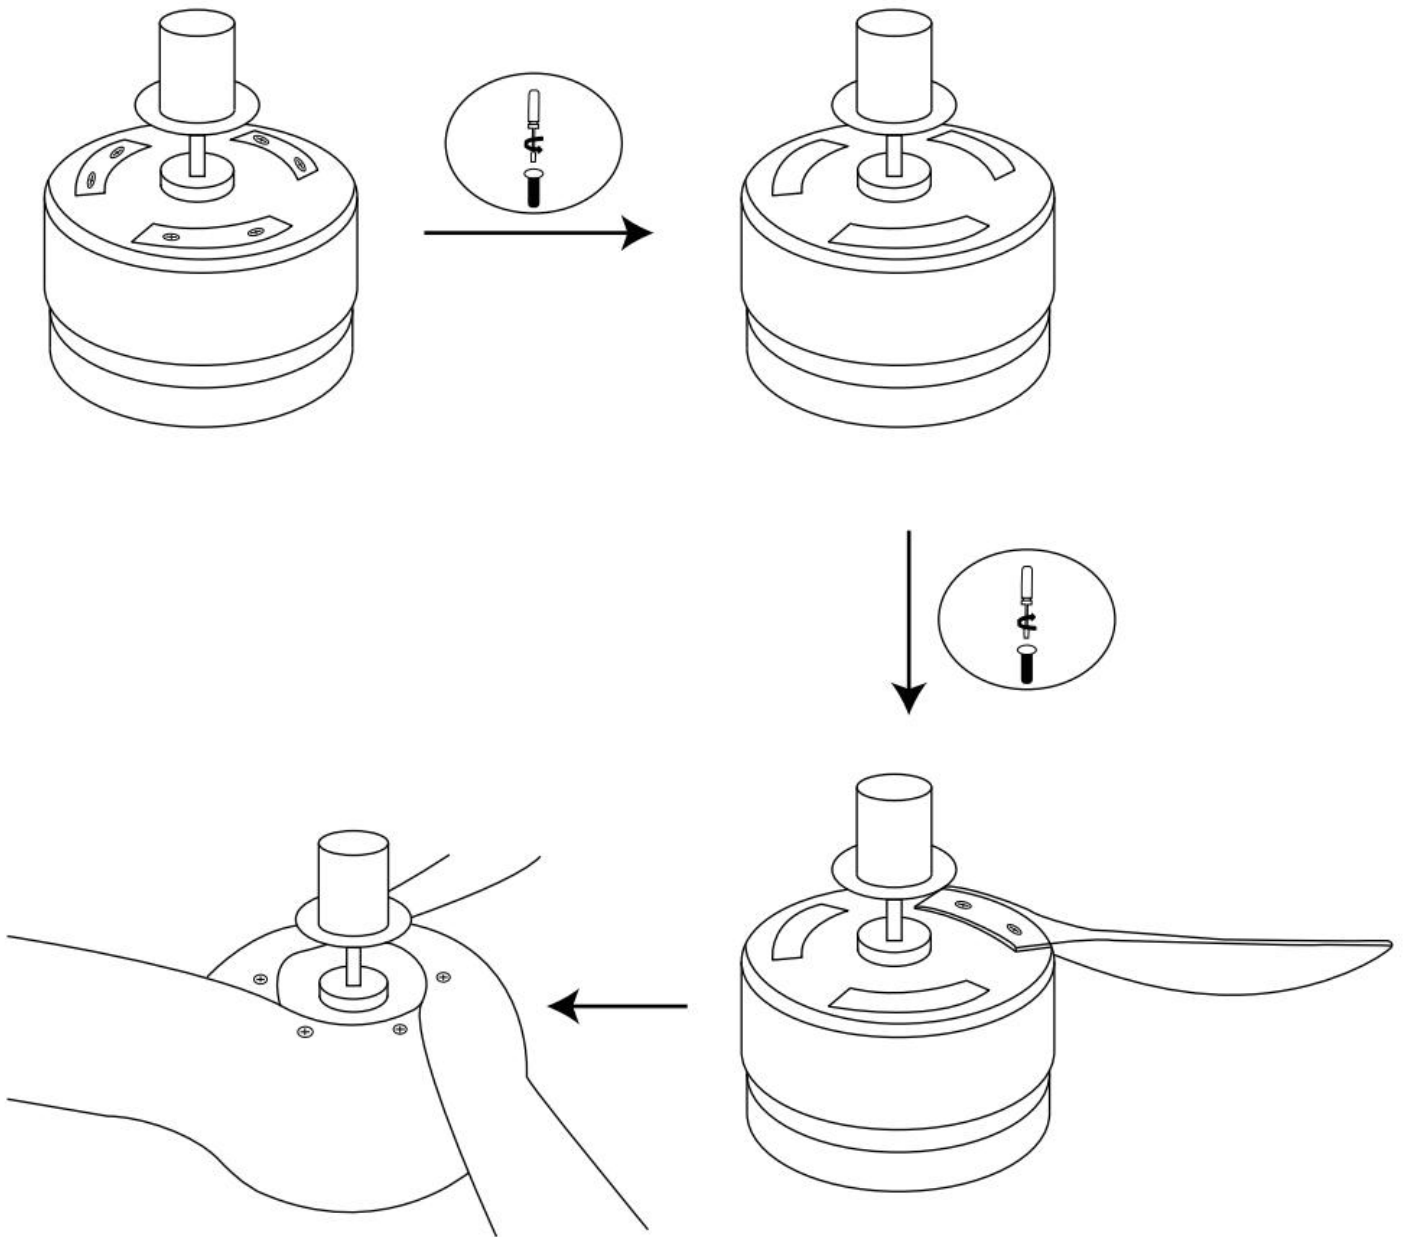


Install bottom decorative cup/hanging cup/hanger

STEP 1 Pull out the R pin and side pin on the down rod.


STEP 2 Make the down rod go through the bottom decorative cup , hanging cup, as shown in the drawing. Then let power cord go through the down rod from the bottom to the top. Insert the down rod into the motor interface. Tighten both sides screws to avoid fan light shaking.

STEP 3 Insert the side pin and fix it with R pin.

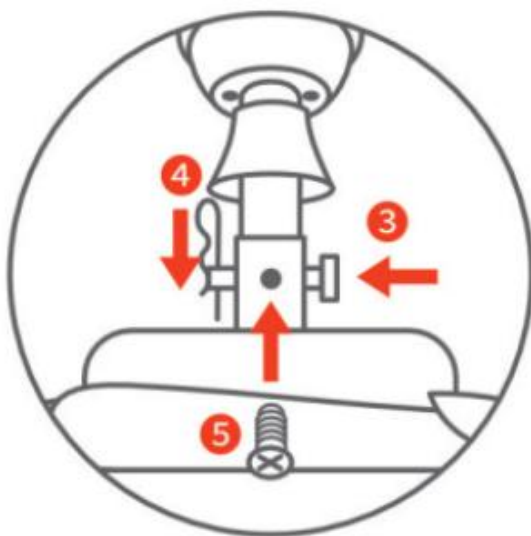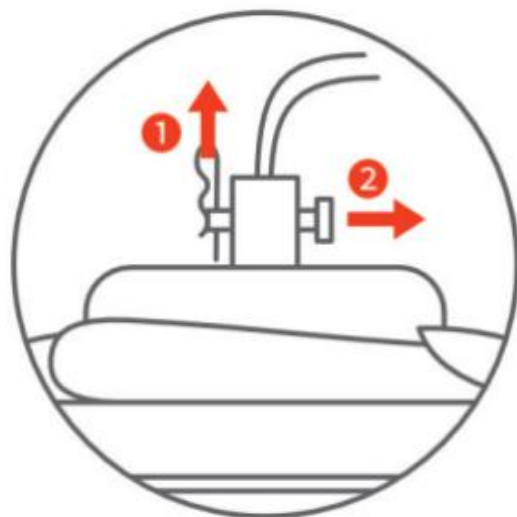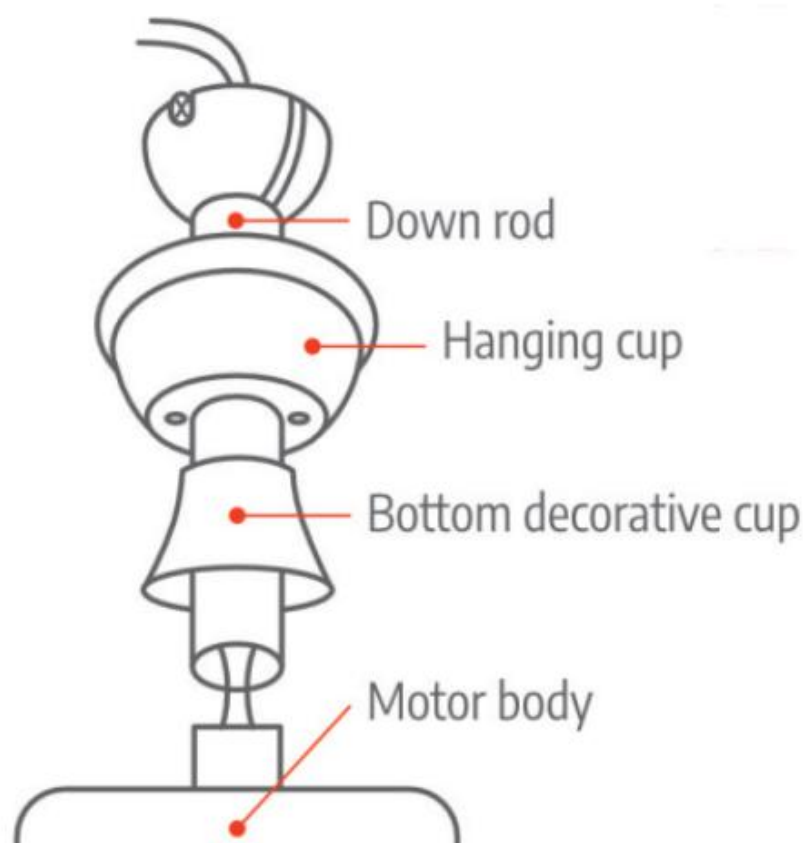

Hanging the motor


Lift the fan carefully and put the down rod ball assembly into the mounting bracket to ensure that the down rod ball is correctly locked in place.

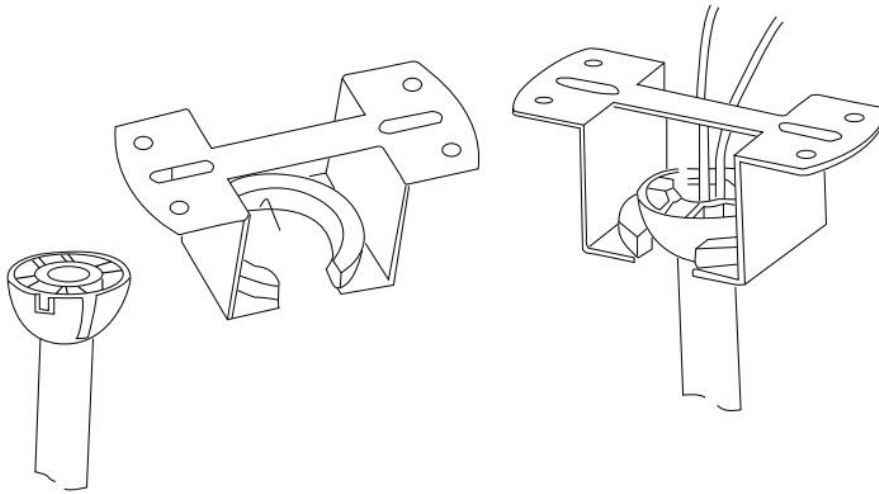

Connect the signal receiver


Connect to the wires coming from the down rod.(same color connected together,fix them with terminal cap).The two wires at the other end of the signal receiver are connected to the home circuit.

After electrifying, it can be used normally, and the installation can continue.

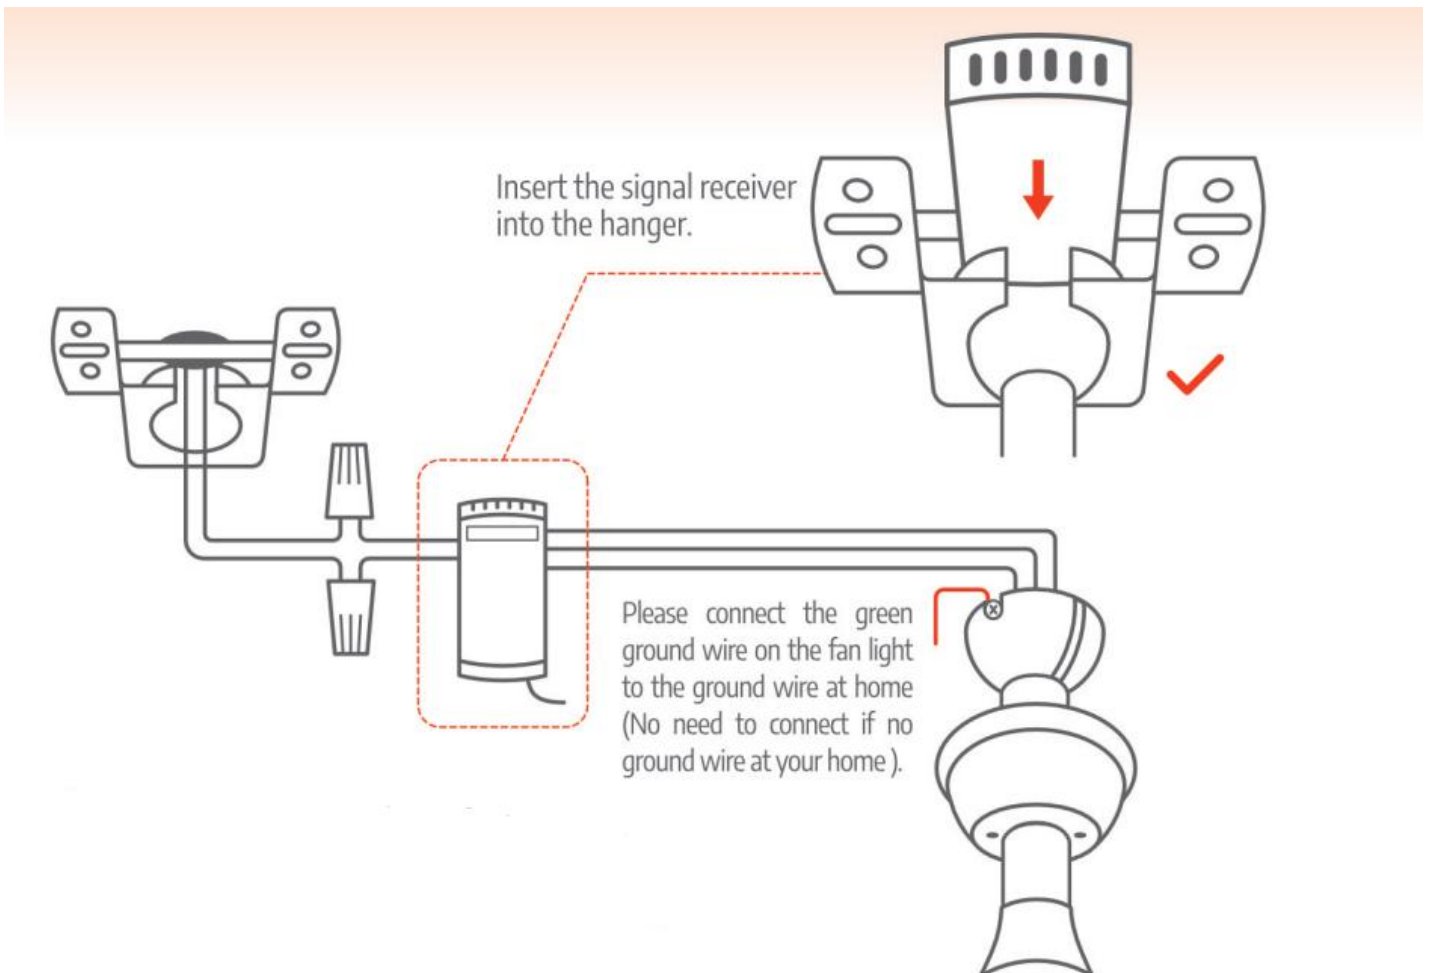

Fix the hanging cup

Pull out more than half of the two screws on the hanging bracket.(Don' t pull out completely).Lift the hanging cup,let the screw pass through the notch of the hanging cup to make it stuck and tight.

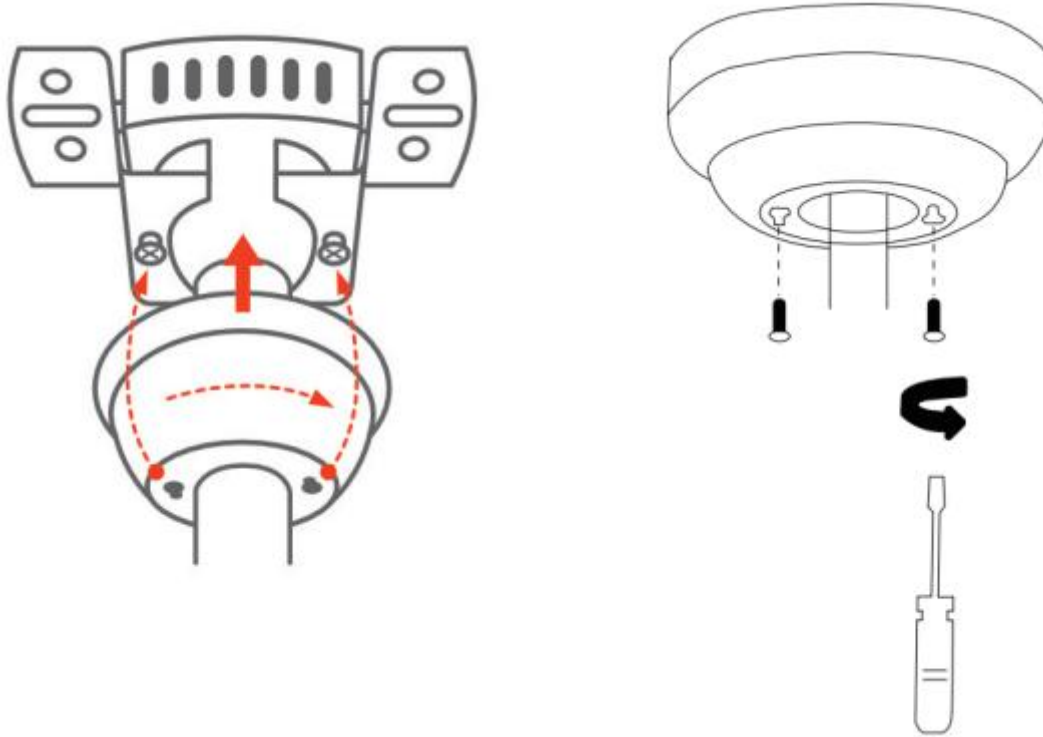

Fix the lampshade

Rotate the lampshade along the card position to complete the installation.

