

# HDPE PORCH SWING

## Assembly Instructions

A046-005-001




**Important** - Please read these instructions fully before starting assembly

### HASSLE-FREE WARRANTY

We stand behind the quality of our products.

For full warranty policy, email: [poly@homeselecting.com](mailto:poly@homeselecting.com)



660 LBS  
CAPACITY



1 PERSON  
ASSEMBLY




AROUND 20 MIN.  
ASSEMBLY

## Components

If you need help or have damaged or missing parts,  
please email: [poly@homeselecting.com](mailto:poly@homeselecting.com)

Please check you have all the components listed below.

Note: The illustration of the product shows the exact position of each part. Check when assembling.

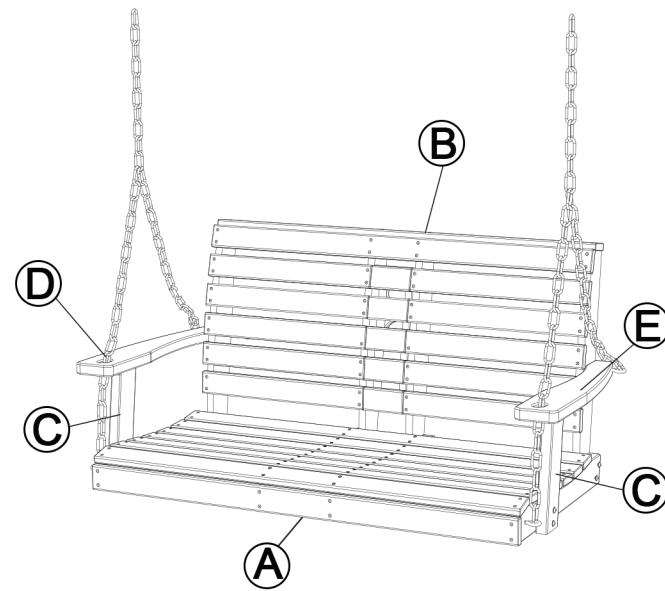

No.	Description	Qty.
A	Seat	1
B	Back	1
C	Side Frame	2
D	Right Arm	1
E	Left Arm	1

## Hardware & Tools


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings  
may be supplied than required.

① x 4 M6 x 70MM & Washer & Nut	② x 4 M6 x 60MM & Washer & Nut	③ x 4 M6 x 50MM & Washer & Nut	④ x 4 M6 x 30MM
⑤ x 2 M8 x 90MM & Washer & Nut	⑥ x 2 M8 x 50MM & Washer & Nut	⑦ 1pc M6 Wrench	⑧ 1pc M8 Wrench
⑨ 1pc Hex Key	⑩ x 2 Metal Chain		

## Assembly Instructions


If you need help or have damaged or missing parts,  
please email: [poly@homeselecting.com](mailto:poly@homeselecting.com)

**⚠ Caution:** Please do not over-tighten bolts and screws during assembly.

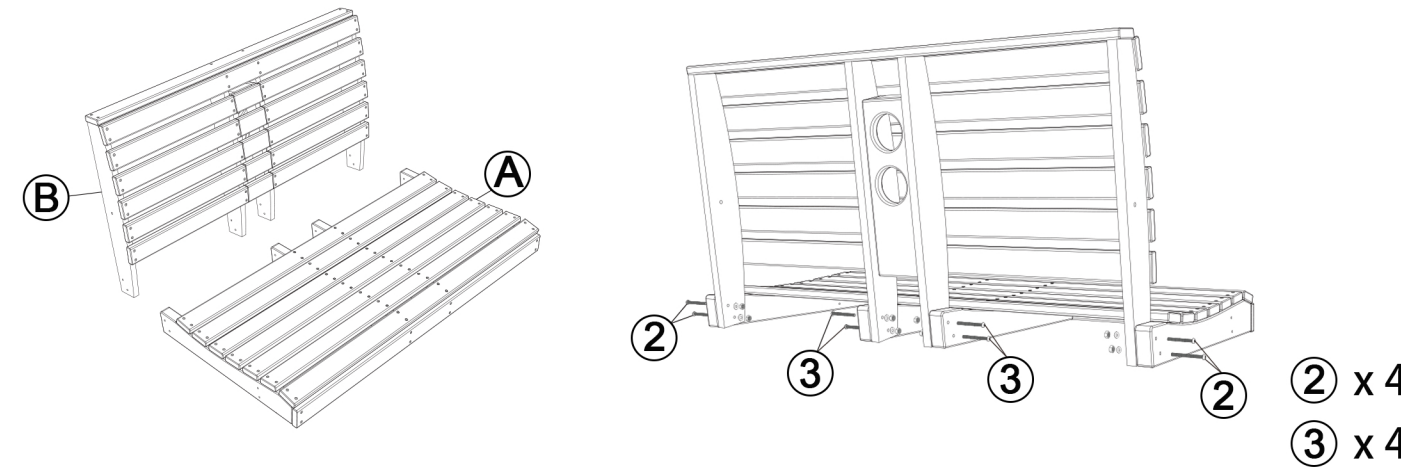

### STEP 1

- Attach "Back (B)" to "Seat (A)" - Using "② M6 × 60MM Bolts" and "③ M6 × 50MM Bolts", tighten with hex key and wrench.

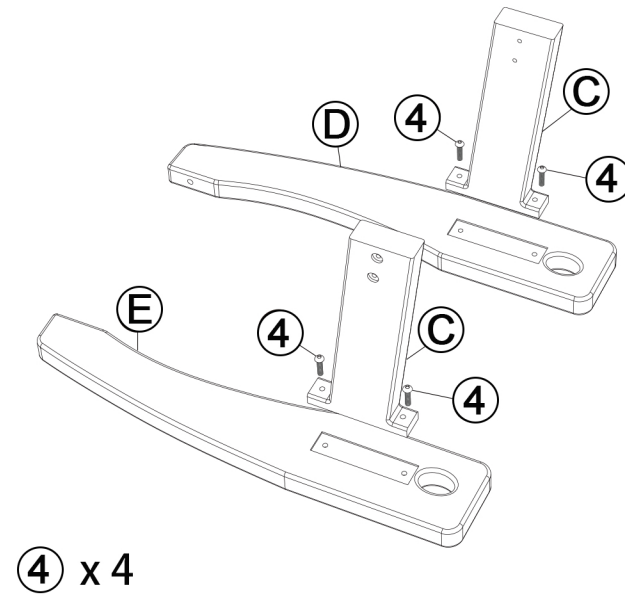


### STEP 2

- Attach "Side Frame (C)" to "Arms (D/E)" - Using "④ M6 × 30MM Bolts", tighten with Hex key .

## Assembly Instructions


If you need help or have damaged or missing parts,  
please email: [poly@homeselecting.com](mailto:poly@homeselecting.com)

**⚠ Caution:** Please do not over-tighten bolts and screws during assembly.

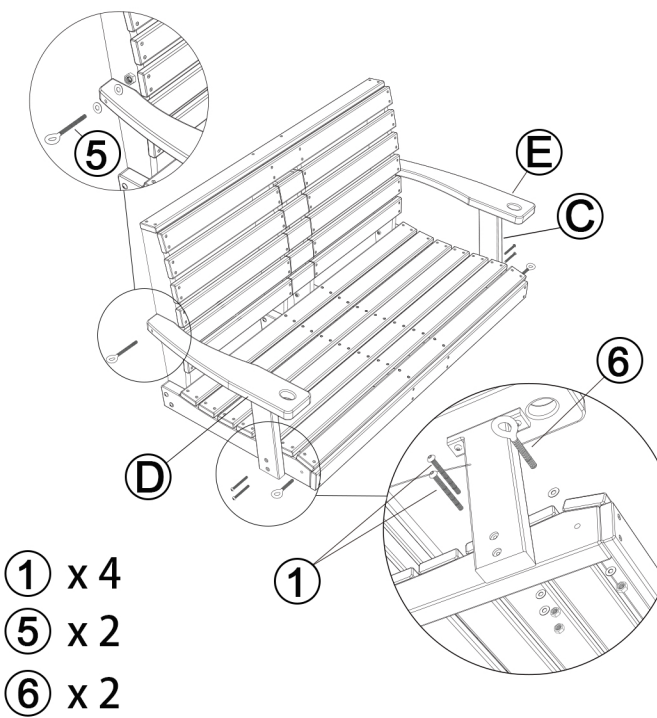

### STEP 3

- Attach "Arms (D/E)" to "Back (B)" - Using "⑤ M8 × 90MM Bolts", tighten with wrench
- Attach "Side Frame (C)" to "Seat (A)" - Using "① M6 × 70MM Bolts", tighten with Hex key.
- Attach "⑥ M8 × 50MM Bolts" to "Seat (A)", tighten with wrench.

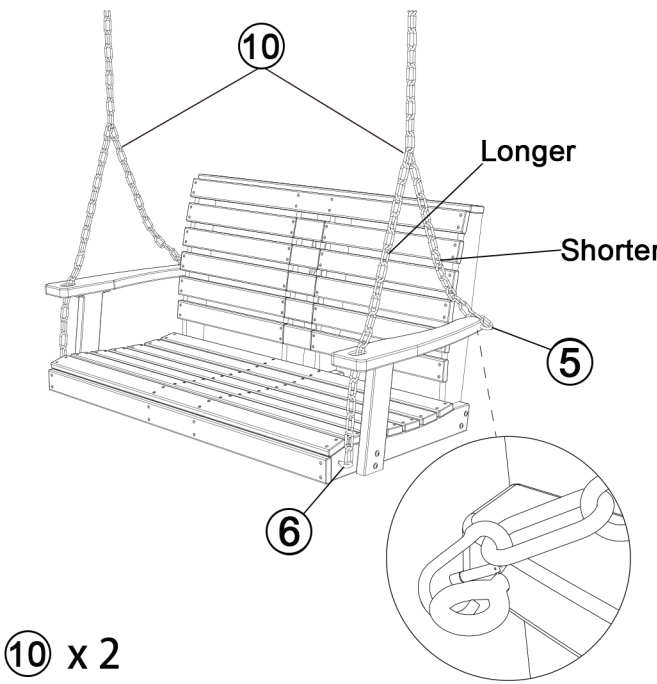

### STEP 4

- Attach the "Metal Chain" to the swing chair.
- The longer chain should go through the hole on the arm, then connect the carabiner to the "⑥ M8 × 50MM Bolts".
- Connect the carabiner on the shorter chain to the "⑤ M8 × 90MM Bolts".

## Warnings

If you need help or have damaged or missing parts,  
please email: [poly@homeselecting.com](mailto:poly@homeselecting.com)

**Important** - Please read these instructions fully before starting assembly

Check you have all the components and tools listed on the page 2.

Remove all fittings from the plastic bags and separate them into their groups.

Keep children and animals away from the work area, small parts may cause choking if swallowed.

Make sure you have enough space to layout the parts before starting.

Assemble on a soft level surface to avoid damaging the unit or your floor.

Do not stand or put weight on the product, this could cause damage.

Assemble the item as close to its final position (in the same area) as possible.

Do not place furniture directly in front of radiators, fires, or any other source of heat.



The assembly will be easier with 2 people while 1 person could also do the job.



Refer to the LISTING page for specific installation videos.

## Cleaning & Maintenance

- Clean the product with a solution of mild soap and water. Dip a soft cloth or sponge into the solution and wipe down the entire surface.

- After cleaning, thoroughly rinse the furniture with water to remove any remaining soap residue.

- When not in use, cover the product with a protective cover to keep it clean and prolong its lifespan.