

# MOEN®

## SPECIFICATIONS

### DESCRIPTION

- Component construction with various finishes identified by suffix
- Includes handshower and hose assembly
- 60" hose included

### OPERATION

- Handshower features 3.75 in. spray face and 6 settings to allow you to customize your shower and desired spray performance

### FLOW


- Designed to deliver 1.75gpm (7.6 L/min) max. at 80 psi

### STANDARDS

- Designed and manufactured to comply with the applicable requirements of WaterSense®, ASME A112.18.1/CSA B-125.1,
- ASSE 1014 and all applicable specifications referenced therein
- Meets WaterSense® criteria

### WARRANTY



- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

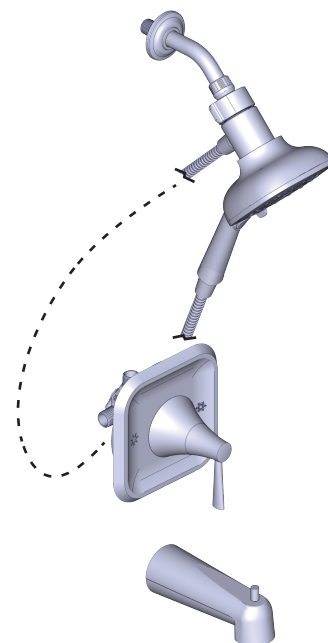

## Ronan™ Posi-Temp®

Single Handle Tub/Shower with Magnetix Rainshower - 82022 Series

Single Handle Shower only with Magnetix Rainshower - 82023 Series

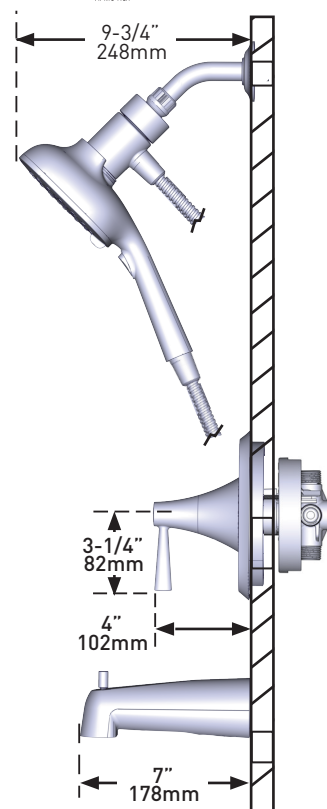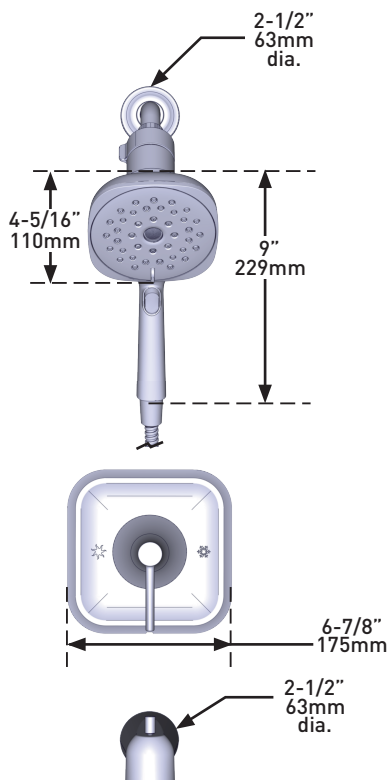

**CRITICAL DIMENSIONS** DO NOT SCALE