

BEFORE YOU BEGIN

 **Caution:** Risk of personal injury or product damage. Handle with care.

Read installation and care instructions thoroughly.

Inspect your sink for any noticeable damage before installation.

Observe all local plumbing and building codes.

Product drawings in this installation guide is for illustration purpose only. Actual product may vary

depending on the model.

Due to the manufacturing process, each sink will vary slightly dimensionally. Please refer to the actual model for cut-out process. (No template will be provided as per handmade procedure)

Be sure to provide enough counter space for the faucet, water supply lines, drain assembly, garbage disposal mounting system and structural parts of cabinet.

Improper installation of this product will void the warranty and may cause damage to the surrounding area. A professional installer is recommended during installation.

Three installation options are available for the sink: undermount installation, flush-mount installation, built-up installation. However, we recommend solely undermount installation.

The other two options are not recommended.

TOOLS & MATERIALS



Safety Glasses



Tape Measure



Sealant



Pencil or Marker



Drill



Framing Square



Equipment for
Protection




Hacksaw/Jigsaw



Basin Wrench


PREPARE THE BASE CABINET

Eridanus farmhouse sinks may require custom cabinetry. Build a plywood platform on a support frame inside of the sink base cabinet. Platform must support the weight of the sink and any attachments such as garbage disposals. When the sink is placed onto a platform, make sure the top of the sink is evenly flush against the bottom of the counter-top. Allow clearance for water supply line and drains or garbage disposal, as necessary.

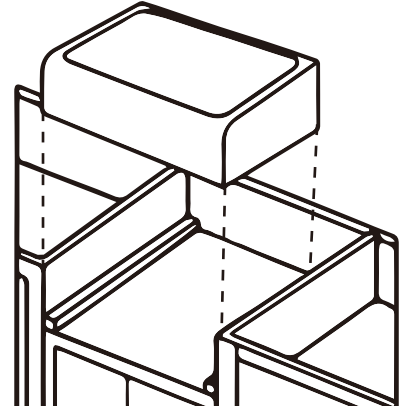

TEMPLATE AND CUTOUT

No template is provided due to variation dimensionally of each item. Make proper cutout of the countertop depending on the installation option. Eridanus recommends a 1/4" reveal on 3 sides when installed undermount style. The actual sink is used as the template guide for each installation. After centering the sink and allowing for any faucets and backsplashes, use a pencil or marker to outline the sink as your guide for the cutout, allowing for any reveal before the actual cutting.

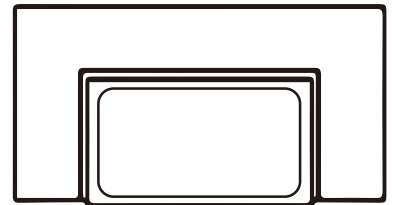

SET THE SINK

Test fit the sink in the opening that was created in the previous steps. The entire weight of the sink should be supported by the support frame. Verify that the sink is in line and level with the top of the cabinet. Use shims, if needed, to level the sink.

Set the sink on top of the cabinet or into the cabinet front cutout. Apply sealant if necessary as a gasket between the sink and cabinet.

Carefully clean bottom of countertop and top flange of sink. Remove excess sealant from the lip or any surfaces with a recommended cleaner.

