

S3692TRM  
Tub/Shower Trim

Location:

## Specification Submittal

### Model Numbers

- ☐ **S3692TRM**  
Tub/Shower Trim
- Valve Options:**  
-S262 Series Temptrol Shower Valve with TRM modifier  
-S162 Series Temptrol Shower Valve requires TC modifier

### Feature Highlights

- Duro Tub/Shower Trim.
- Requires Temptrol® Pressure Balancing Shower Valve.
- Integral diverter.
- Metal lever handle.
- 5-5/8" square tub spout.
- Single mode showerhead.
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetal construction, plated in standard polished chrome finish.

### Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min)  
1.75 gpm (6.6 L/min) 2.0 gpm  
(7.6 L/min)
- Lever handle meets ADA  
requirements for operation




### Options/ Modifications

- ☐ **15** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **175** 1.75 gpm (6.6 L/min) flow restrictor
- ☐ **L1** Less showerhead
- ☐ **L4** Less head, arm and flange
- ☐ **L7** Less shower handle
- ☐ **TC** Test Cap Trim (includes TA-10&T-12A) *used with S162 series Temptrol Shower Valve*
- ☐ **MB** Matte Black finish
- ☐ **BBZ** Brushed Bronze finish
- ☐ **STN** Satin Nickel finish

### Warranty

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.

**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



### SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S3692	STN		15	TRM		S3692STN15TRM
S3692	MB	L7		TRM	TC	S3692MBL7TRMTC

**Note:** No more than two modifiers (L1-L7) and modifier order will follow numerical order.

### Architectural/ Engineering Specification

Symmons Duro Tub and Shower Trim \_\_\_\_\_ Includes Duro Tub and Shower Trim powered by Temptrol® Pressure Balancing Shower Valve. Features integral diverter, metal lever handle, 5-5/8" square diverter tub spout, single mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year Commercial Warranty. Lever handle meets ADA requirements for operation. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), and 2.0 gpm (7.6 L/min) compliant. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "175 - 1.75 gpm (6.6 L/min) flow restrictor", "L1 - Less showerhead", "L4 - Less head, arm and flange", "L7 - Less shower handle", "TC - Test Cap Trim", "STN - Satin Nickel finish", "MB - Matte Black finish", and "BBZ - Brushed Bronze finish".

## Dimensions

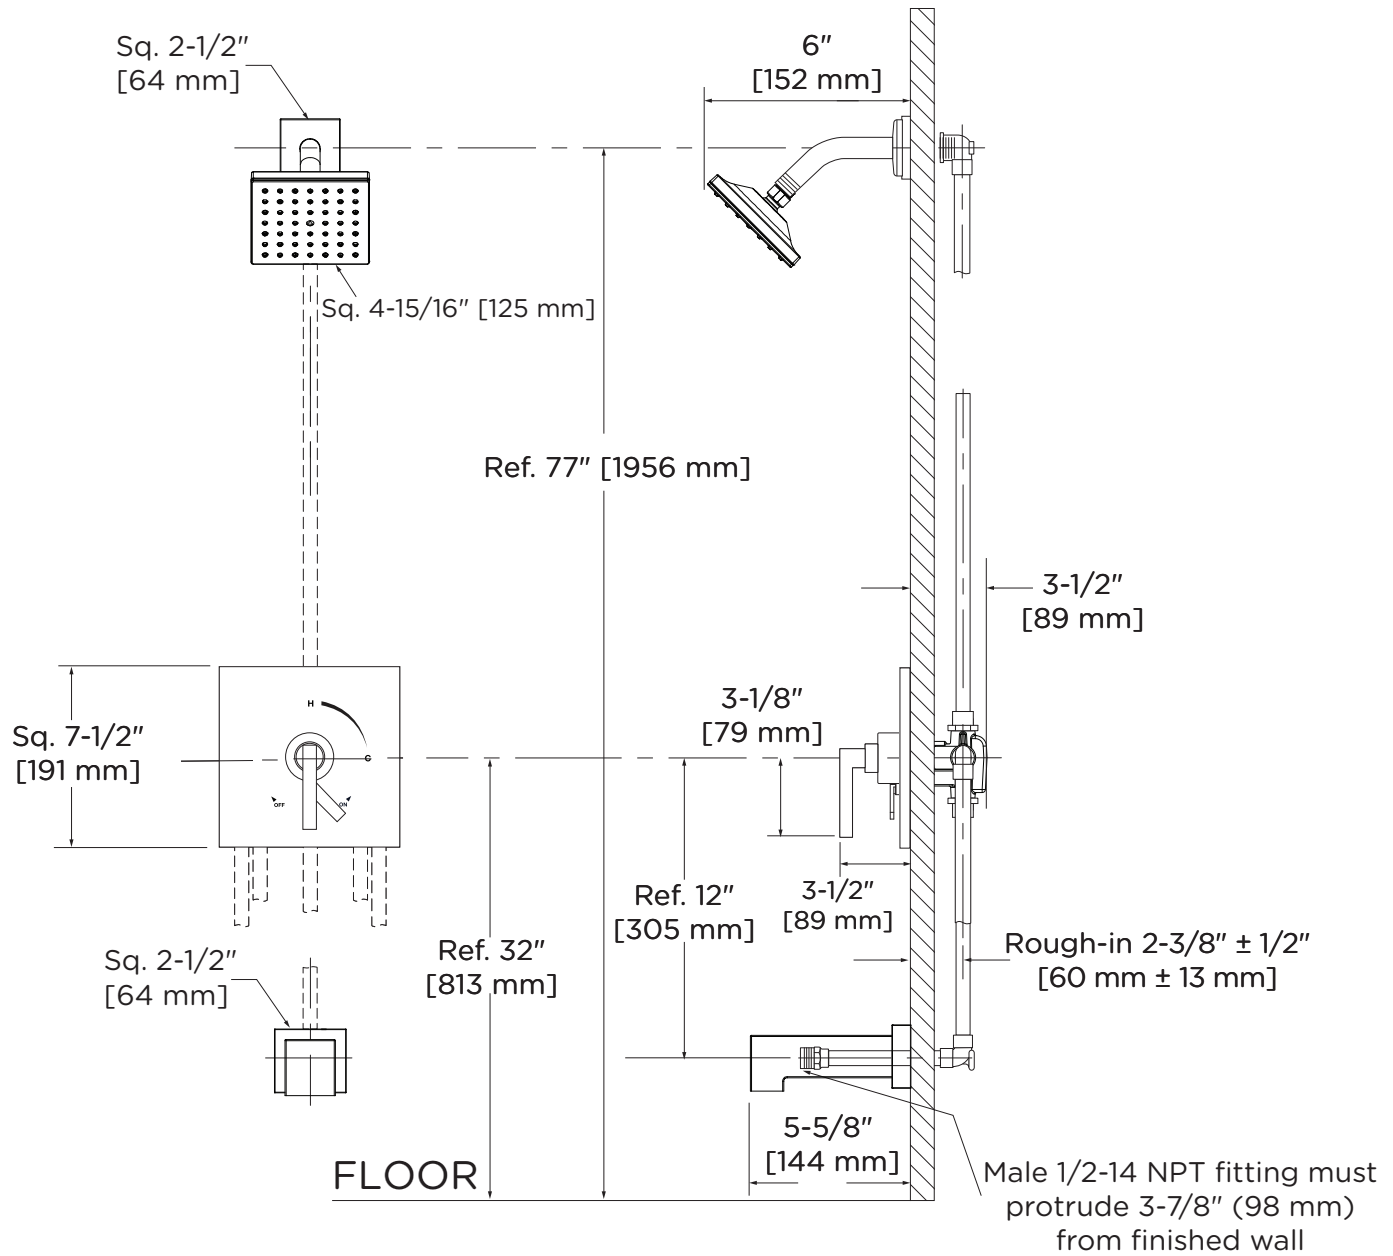

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.