
INSTALLATION INSTRUCTIONS


BEFORE INSTALLATION

- · To insure proper installation, please read the following instructions carefully.
- · Please make sure that the water supply has been shut off at the stop valve.


NOTE:Style may vary by model, but installation way are the same

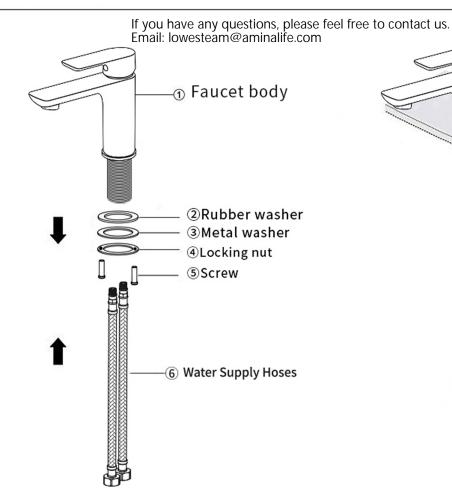

- Remove the rubber washer, metal washer and locking nut from the faucet body
- 2. Screw and hand tighten the hot and cold water supply hoses to the faucet body(Note: DO NOT use a wrench to tighten the hoses!)

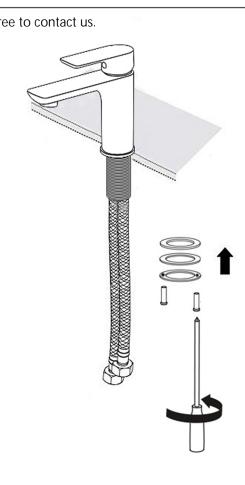

- 3. Place faucet body into sink hole
- 4. Re-install the rubber washer, metal washer and locking nut to the faucet body. Hand tighten the locking nut then use a screw driver to tighten the screws on the locking nut

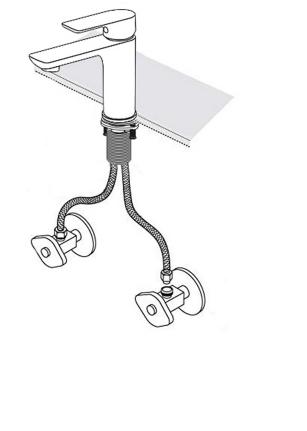

- 5. Screw the hot and cold water supply hoses to the stop valves
- 6. Turn on the faucet to check for leakage

[•] Every once in a while, please rinse the faucet with lukewarm soapwater, and wipe it clean with a soft duster cloth. Please avoid any abrasive cleaners, steel wools, or corrosive chemicals.