




## 5991TRM Shower Trim Specification Submittal

Location:



### Model Numbers

- ☐ **5891TRM**  
Shower Trim
- Valve Options:**  
-261 Series Temptrol® Shower Valve used with TRM modifiers  
-161 Series Temptrol Shower valve requires TC modifier

### Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation



### Warranty


**Limited Lifetime** - for residential installations.  
**10 Years** - for commercial/industrial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



### Feature Highlights

- Birch® Shower Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Metal lever handle
- Single-mode HydroMersion™ showerhead
- 2.0 gpm (7.6 L/min) flow restrictor
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish

### Options/Modifications

- ☐ **15**  1.5 gpm (5.7 L/min) flow restrictor
- ☐ **L1** Less showerhead
- ☐ **L7** Less handle
- ☐ **TC** Test Cap Trim (includes TA-10&T-12A) *used with 16 series Temptrol Valve*
- ☐ **STN** Satin Nickel finish

### SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
5991	MB	L1		TRM	TC	5991MBL1TRMTC
5991	MB			TRM		5991MBTRM

**Note:** No more than two modifiers (L1-L7) and modifier order will follow numerical order.

### Architectural/Engineering Specification

Symmons Birch® Shower Trim \_\_\_\_\_ Includes Birch® Shower Trim, Requires Temptrol® Pressure Balancing Shower Valve, Metal lever handle, Single-mode HydroMersion showerhead, 2.0 gpm (7.6 L/min) flow restrictor, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5991TRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L7 - Less handle", "TC - Test Cap Trim", "STN - Satin Nickel finish".

# Dimensions

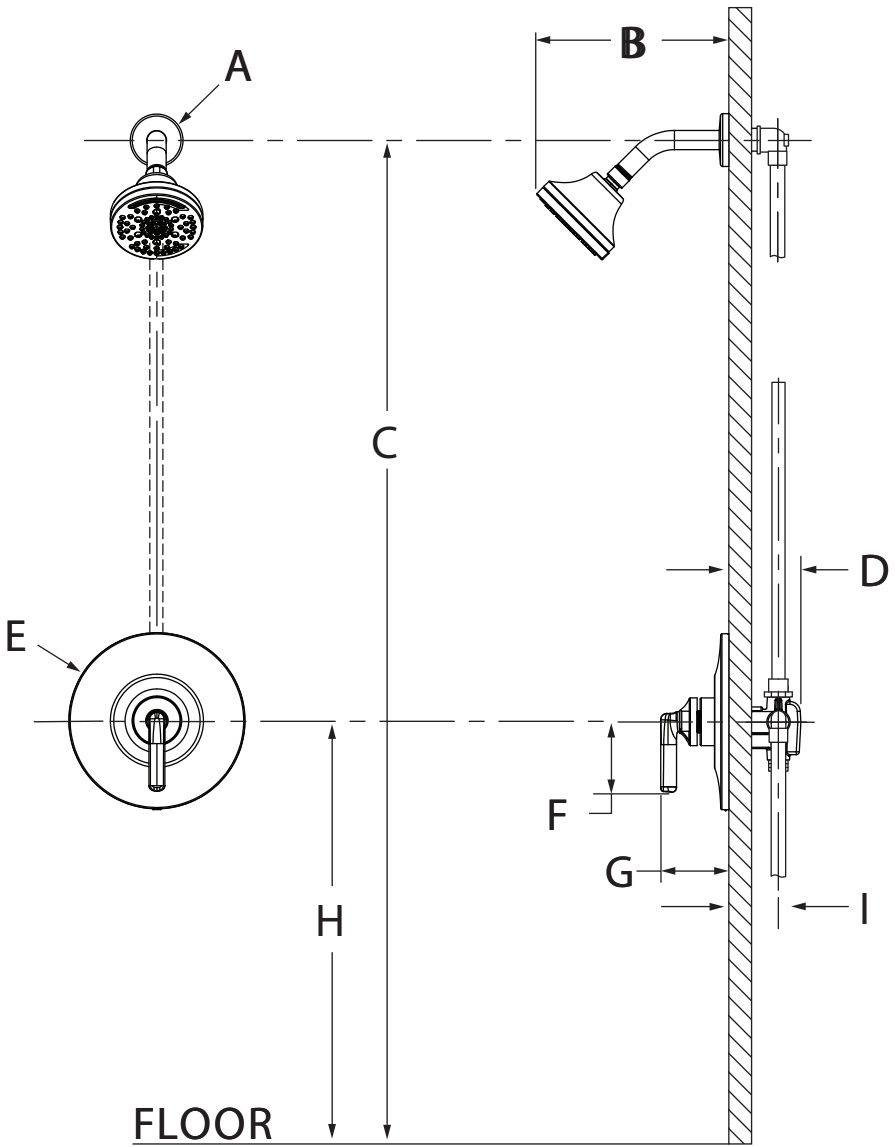

Measurements	
A	Ø 2-1/4", 57 mm
B	8-3/16", 208 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Ø 7-1/2", 190 mm
F	3", 76 mm
G	2-7/8", 74 mm
H	Ref. 42", mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

## Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.