




MANHATTAN  
COMFORT

888-230-2225

*help@manhattancomfort.com*

*319 Ridge Rd. Dayton, NJ 08810, New Jersey - United States*

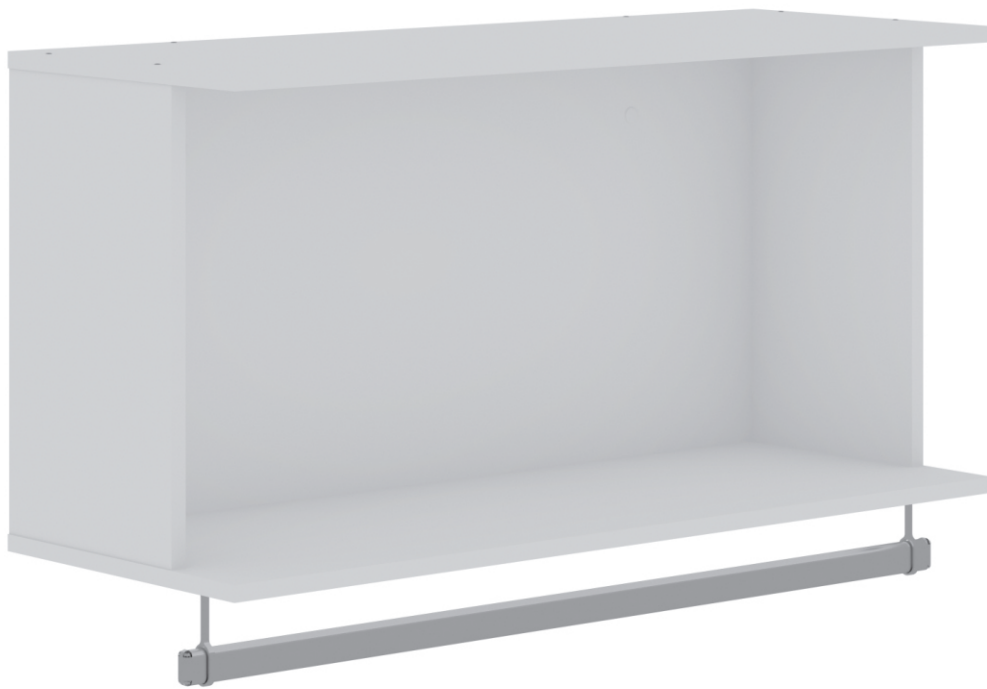


# ***Rockefeller***


**35.24\"/>**

# Included in the package


Part	Description	Qty	Box
01	Base	01	01
02	Top	01	01
03	Lateral	02	01
04	Rear Panel	01	01
05	Hanger Bar	01	01




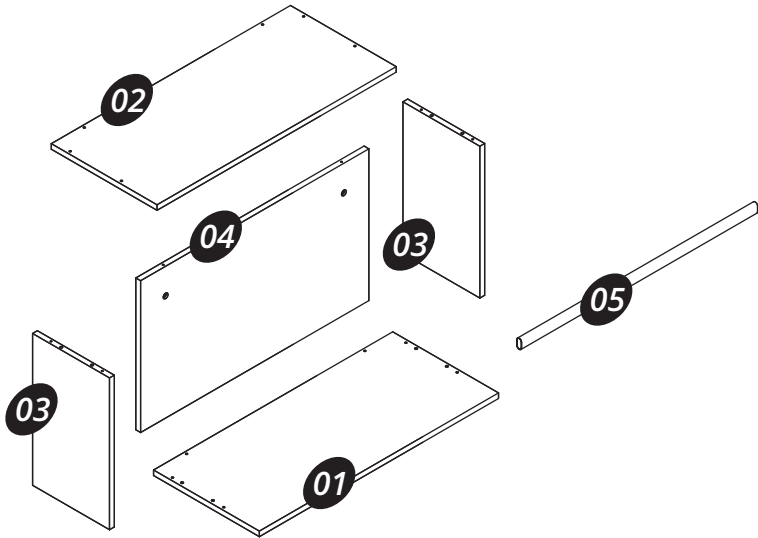


## Hardware

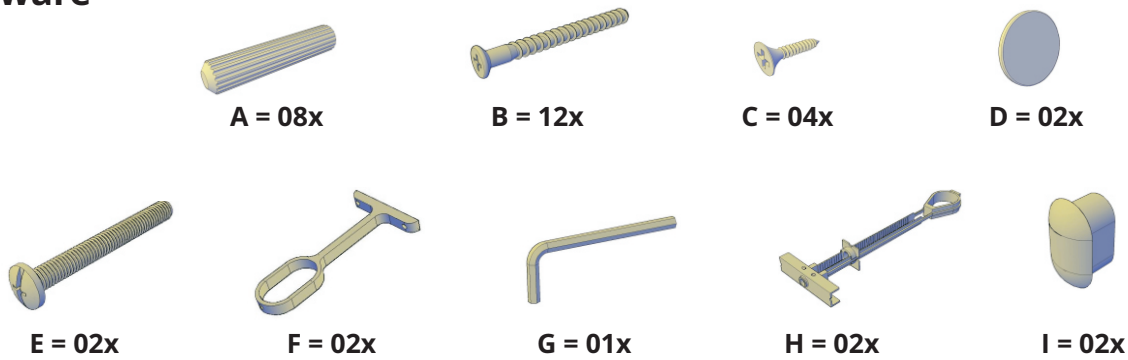



### Tools needed (not included)

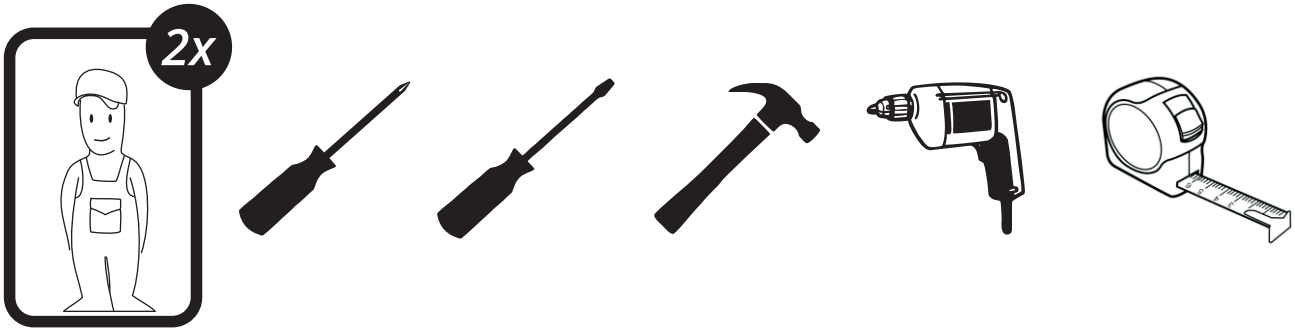

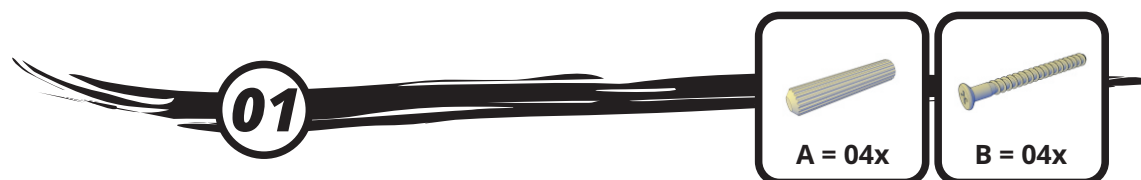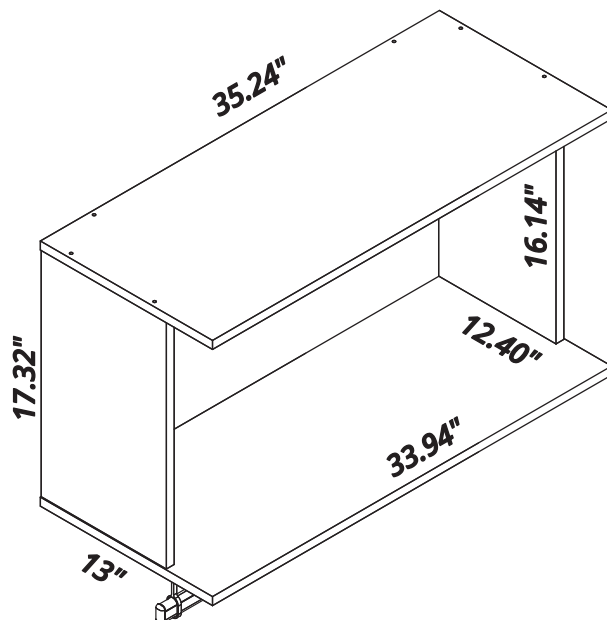
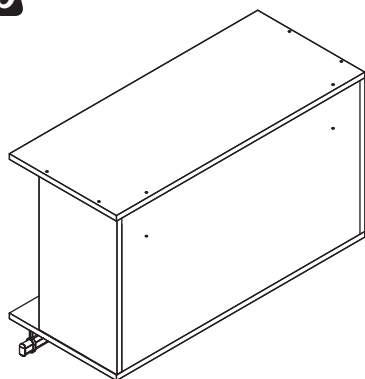
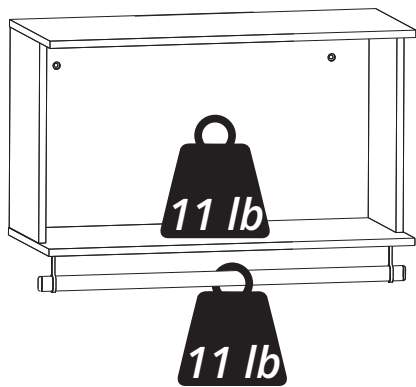


Connect the part (01) onto the parts (03) with the hardware (A + B).

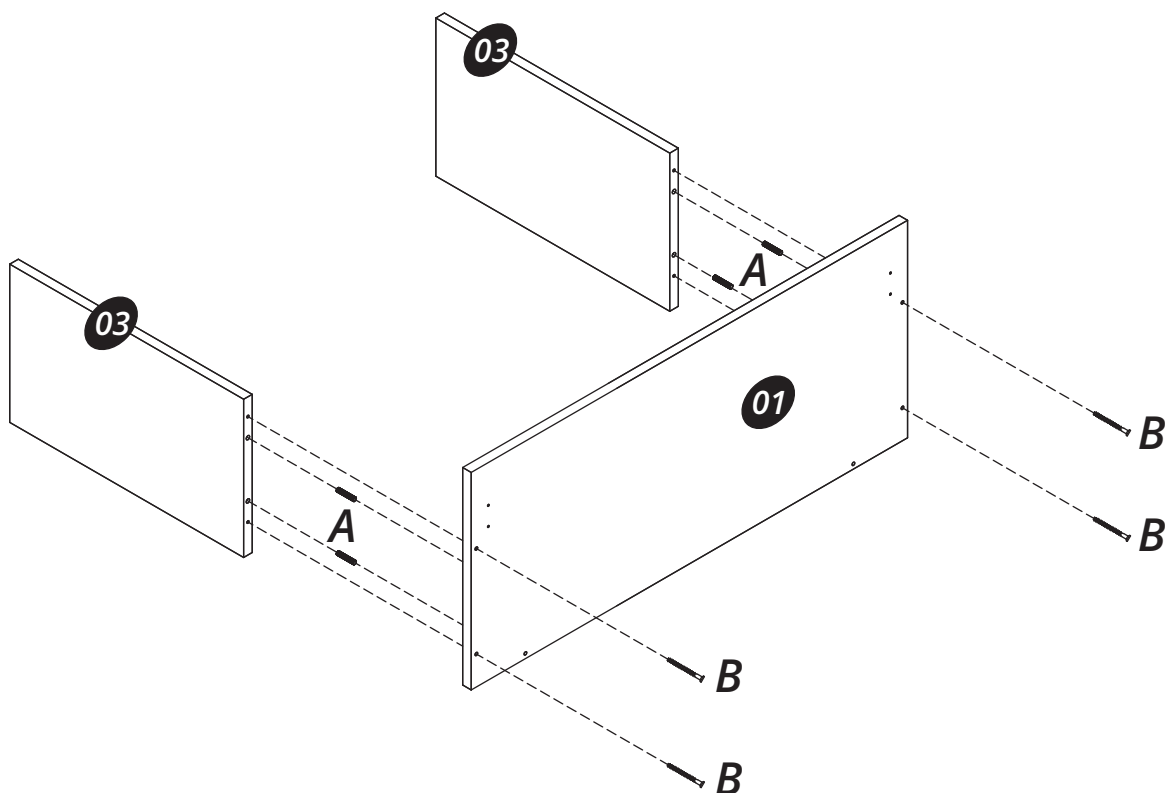



**02****B = 02x**

Observe the correct position of the part (04) before connect onto the part (01) with the hardware (B).

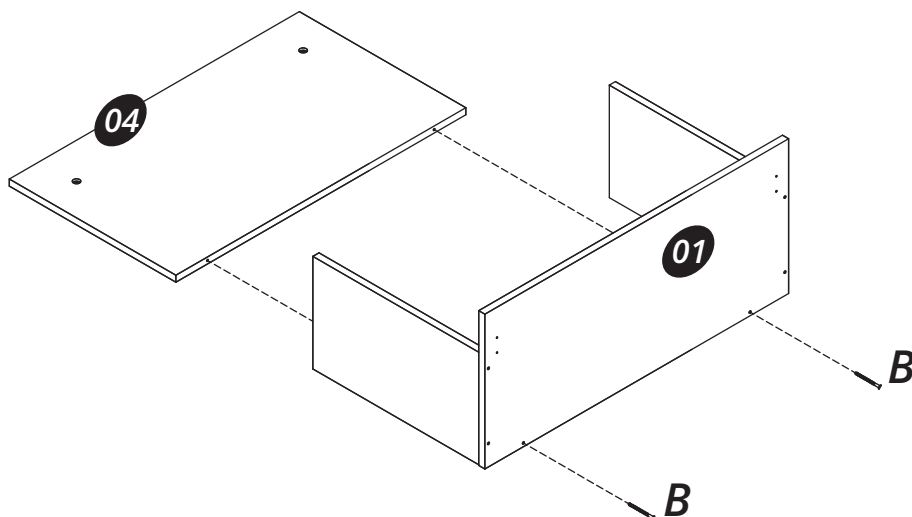**03****A = 04x****B = 06x**



Connect the part (02) onto the parts (03, 04) with the hardware (B) and the hardware (A).

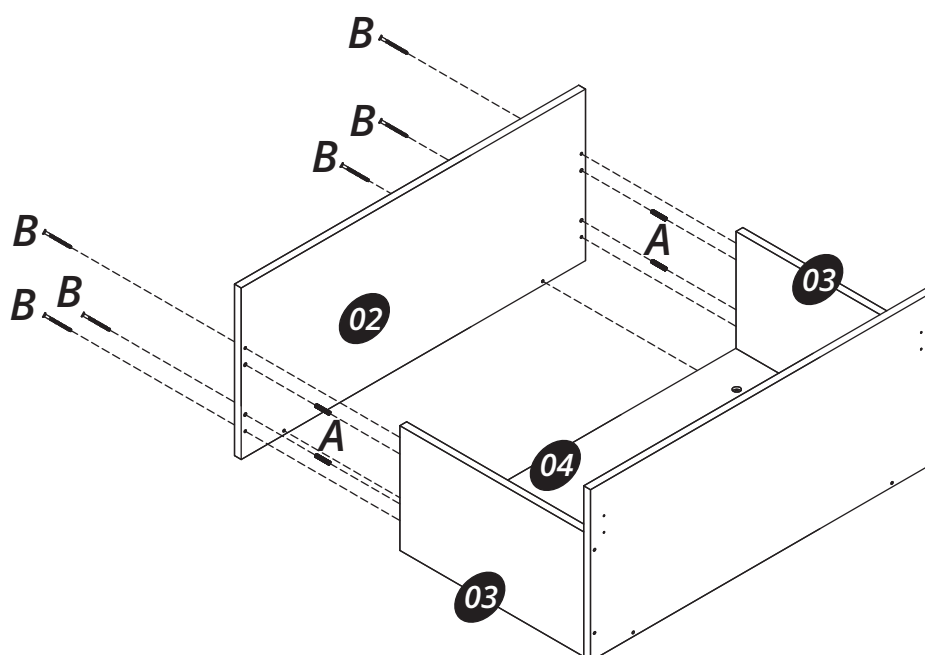

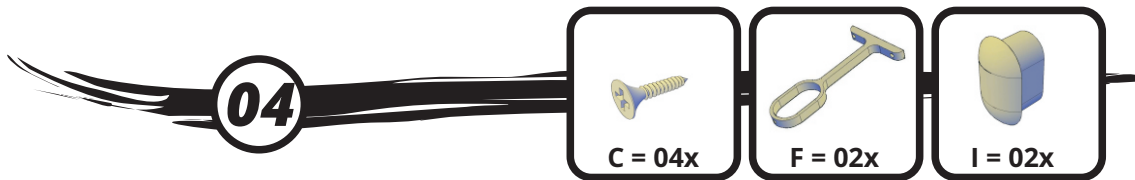


Connect the hardware (F) onto the part (01) using the hardware (C).


Connect the hardware (I) into the part (05).

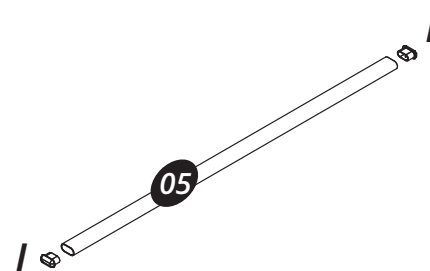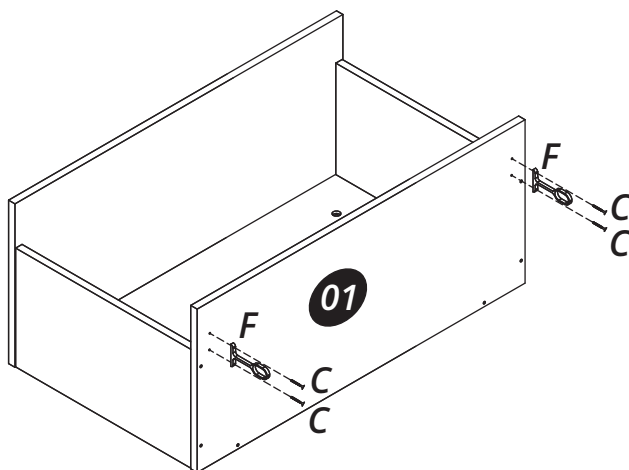

Pass the part (05) through the hardware (F) and use the hardware (G) to tight the screw as shown on detail.


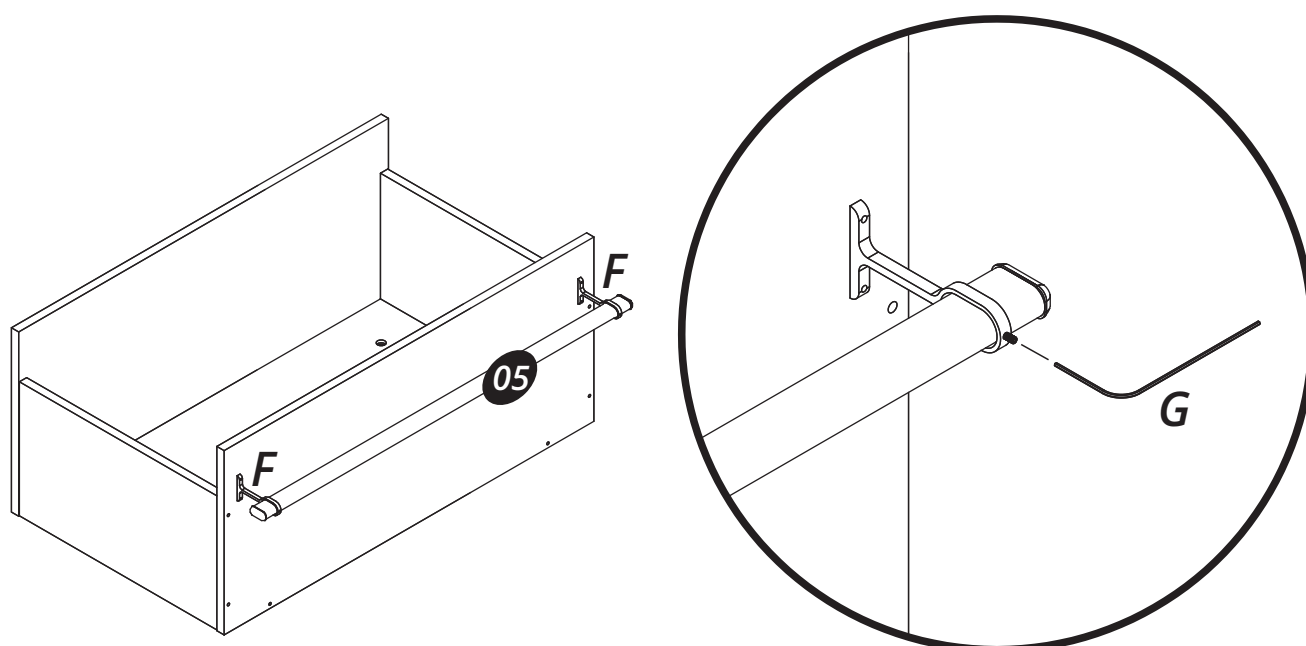


06



Observe the indicated height of the Floating Open Hanging Closet using the floor as reference (around of 72").


You will need a pencil to mark where you should drill the wall with a 1 /2" drill bit to put in the hardware (H).

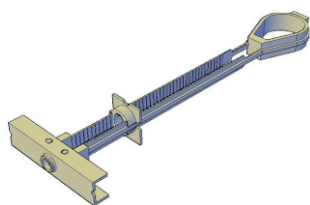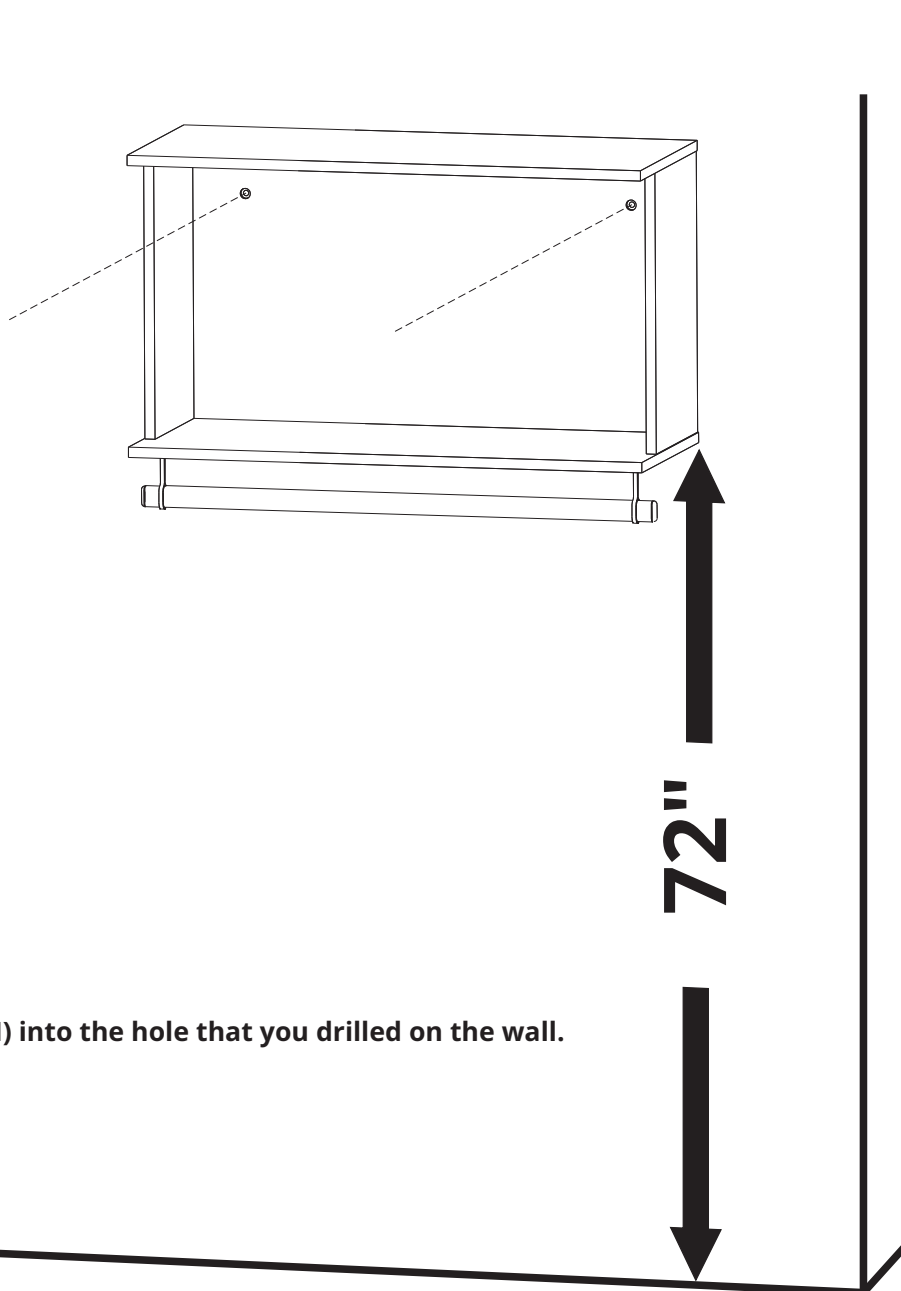

You will need apply the hardware (H) into the hole that you drilled on the wall.



Connect the Floating Open Hanging Closet on the wall with the hardware (E + D)

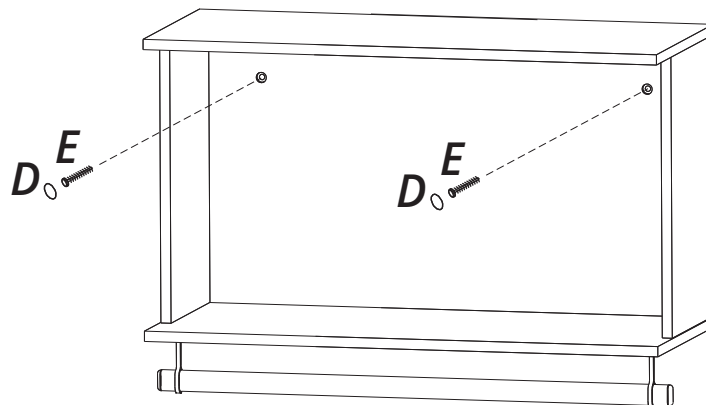



MANHATTAN  
COMFORT

888-230-2225

*help@manhattancomfort.com*

*319 Ridge Rd. Dayton, NJ 08810, New Jersey - United States*




***Rockefeller***

**20.08" Floating Open Hanging Closet**




# Included in the package


Part	Description	Qty	Box
01	Base	01	01
02	Top	01	01
03	Lateral	02	01
04	Rear Panel	01	01
05	Hanger Bar	01	01

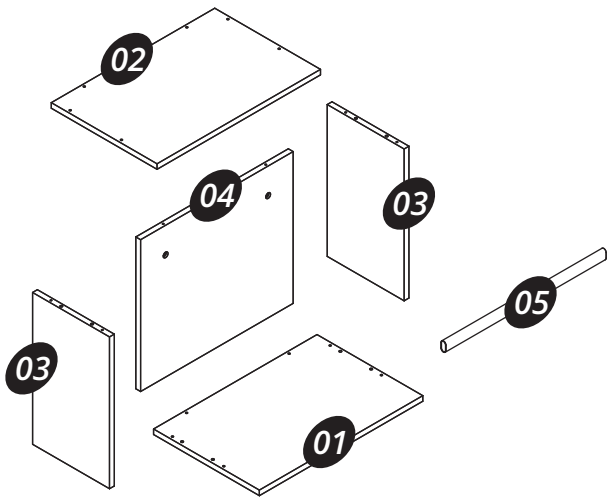

## Hardware



A = 08x




B = 12x



C = 04x




D = 02x




E = 02x




F = 02x



G = 01x







H = 02x




I = 02x


## Tools needed (not included)

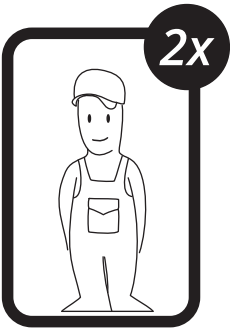


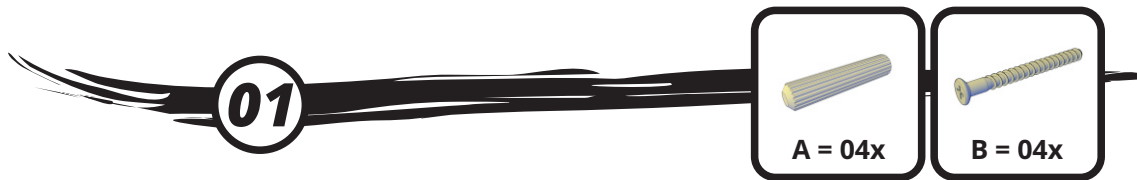
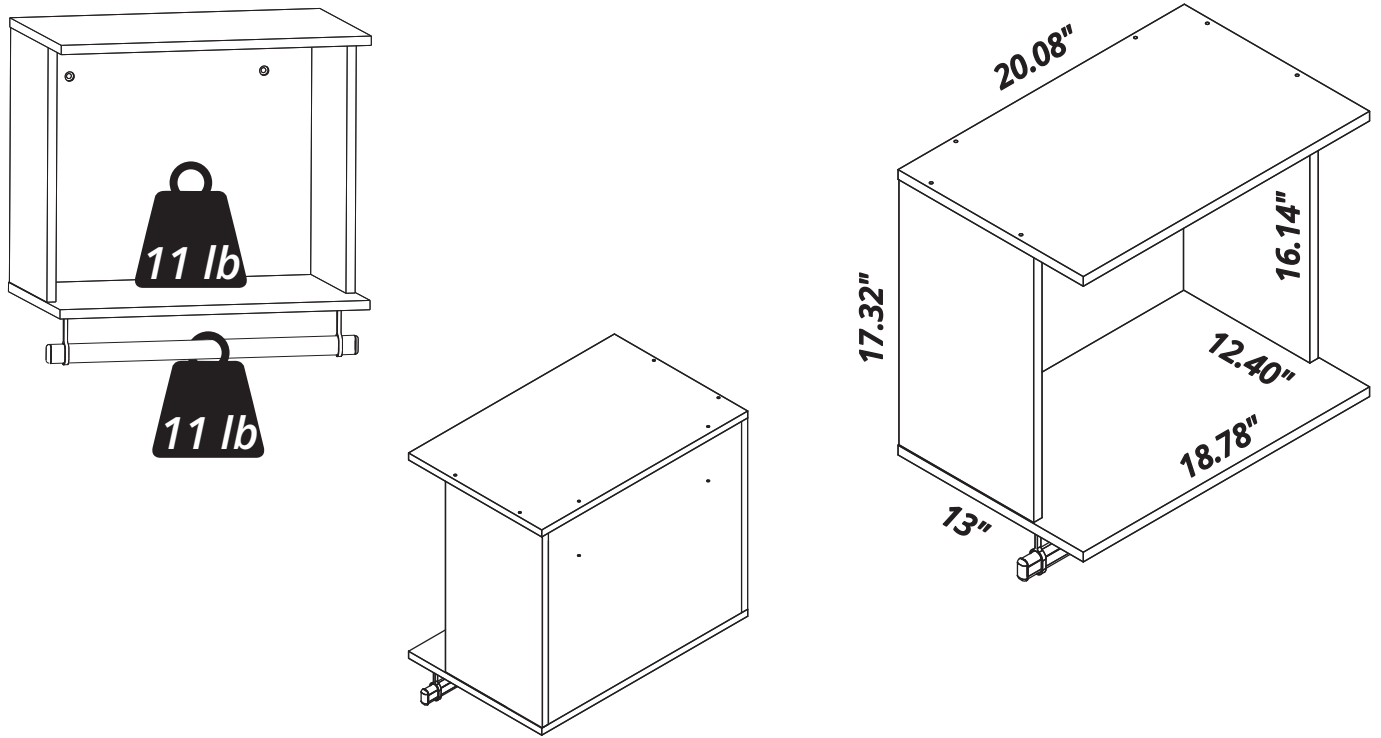


Connect the part (01) onto the parts (03) with the hardware (A + B).

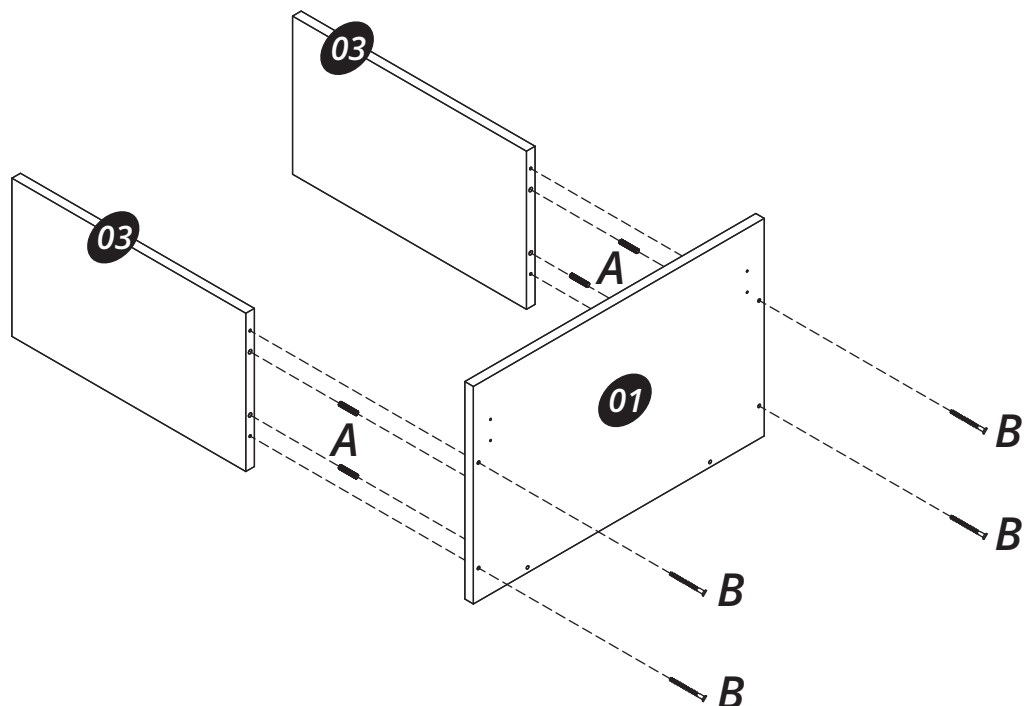



**02****B = 02x**

Observe the correct position of the part (04) before connect onto the part (01) with the hardware (B).

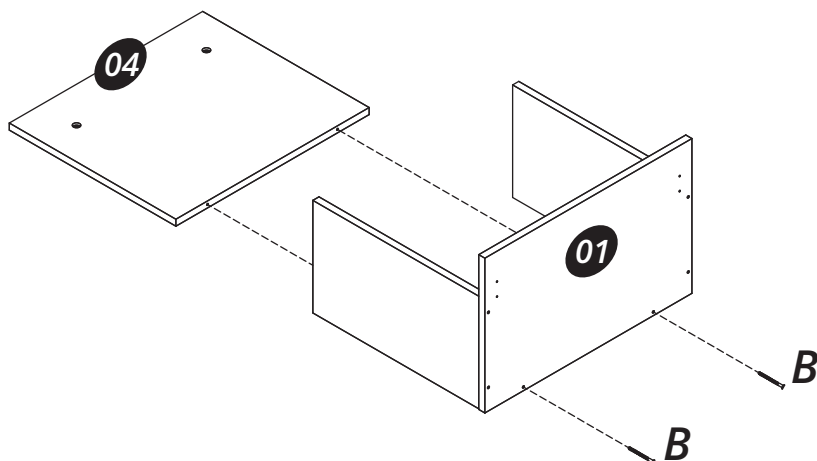**03****A = 04x****B = 06x**




Connect the part (02) onto the parts (03, 04) with the hardware (B) and the hardware (A).

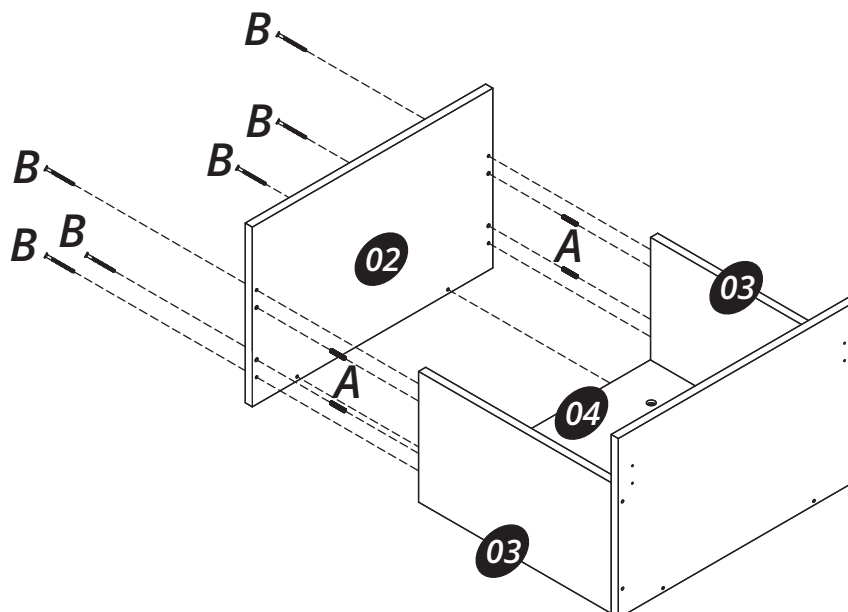


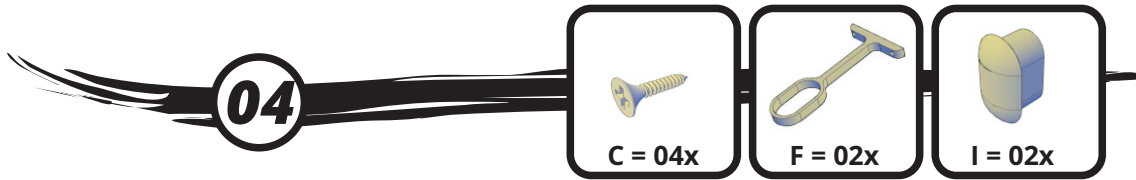


Connect the hardware (F) onto the part (01) using the hardware (C).


Connect the hardware (I) into the part (05).

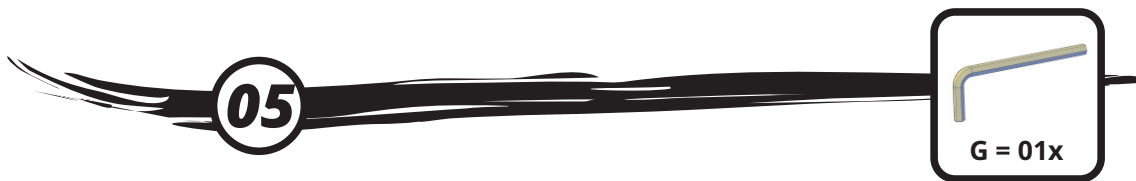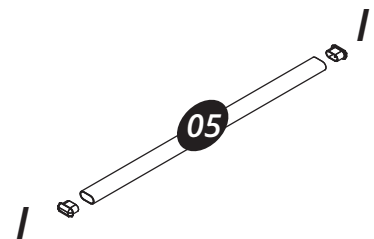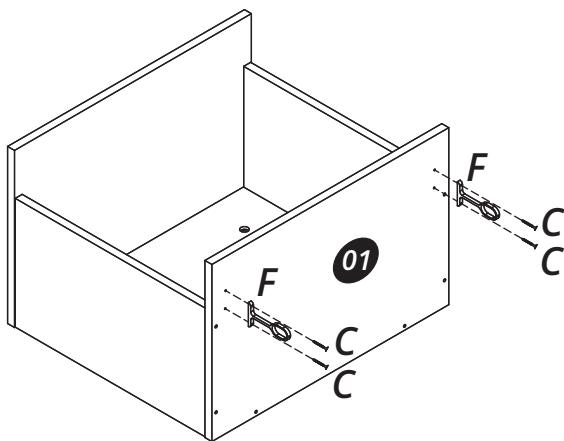

Pass the part (05) through the hardware (F) and use the hardware (G) to tight the screw as shown on detail.

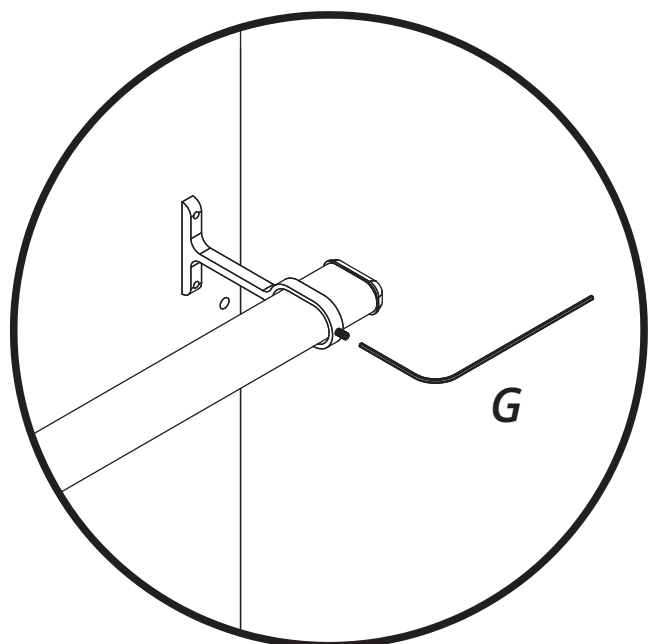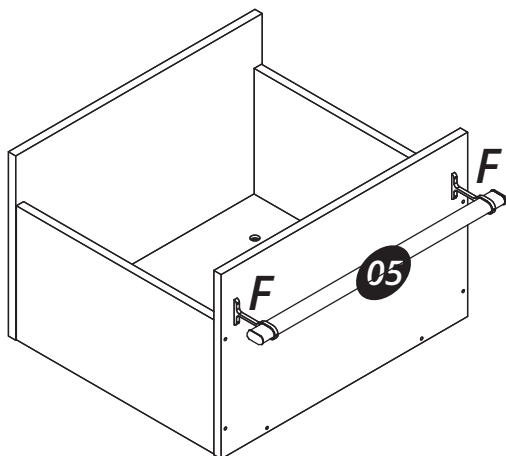


**06**




H = 02x

Observe the indicated height of the Floating Open Hanging Closet using the floor as reference (around of 72").

You will need a pencil to mark where you should drill the wall with a 1 /2" drill bit to put in the hardware (H).

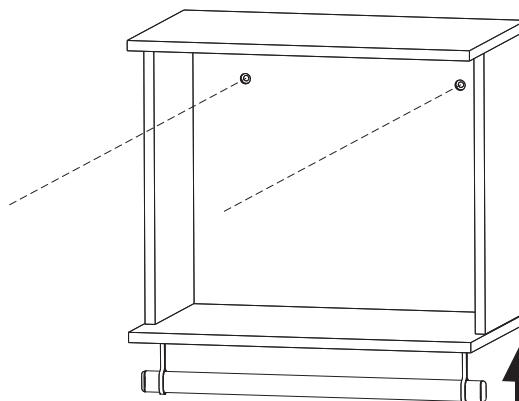


72"

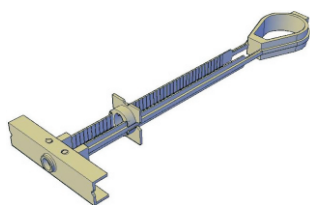

You will need apply the hardware (H) into the hole that you drilled on the wall.



Connect the Floating Open Hanging Closet on the wall with the hardware (E + D)

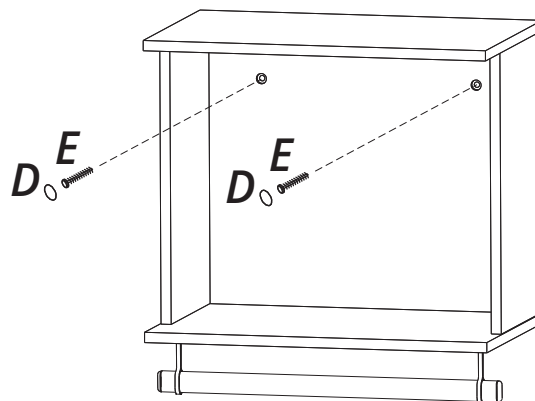



MANHATTAN  
COMFORT

888-230-2225



*help@manhattancomfort.com*




***Rockefeller***  
*dresser*

# Included in the package


- 01 - Base = 01 piece
- 02 - Left side panel = 01 piece
- 03 - Right side panel = 01 piece
- 04 - Top panel = 01 piece
- 05 - Lower back panel = 01 piece
- 06 - Front of the drawer = 03 pieces
- 07 - Left side panel of the drawer = 03 pieces
- 08 - Right side panel of the drawer = 03 pieces
- 09 - Rear panel of the drawer = 03 pieces
- 10 - Base of the drawer = 03 pieces
- 11 - Decorative apply = 03 pieces
- 12 - Feet = 04 pieces
- 13 - Upper back panel (hole) = 01 piece
- 14 - Plastic union profile = 01 piece

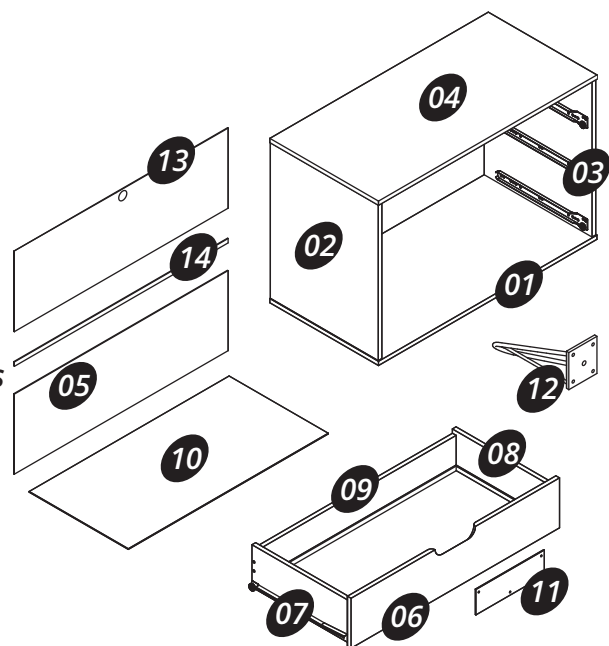


A = 16x

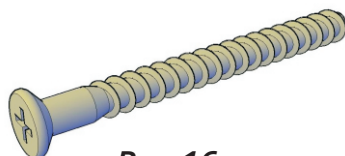

B = 16x



C = 08x




D = 16x




E = 16x




F = 23x




G = 28x




H = 01x



I = 12x



J = 01x



K = 01x



L = 16x




Tools needed  
(not included)



Phillips screw driver


Screw driver



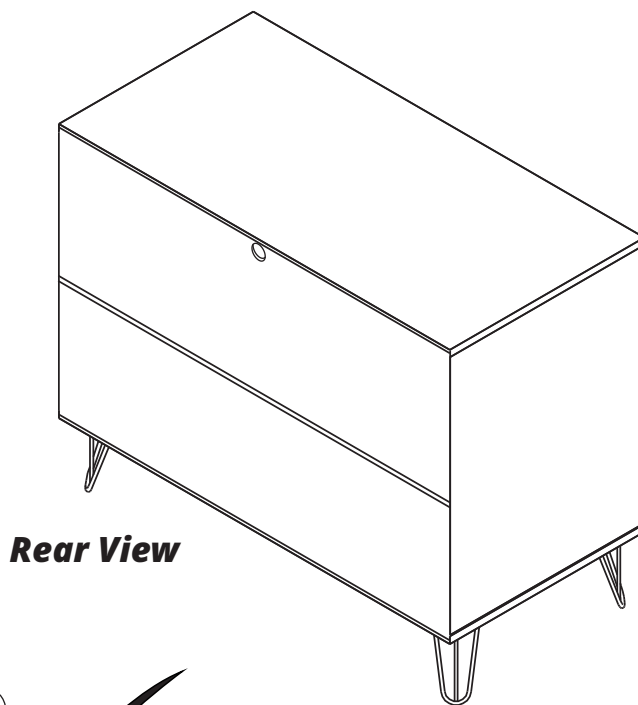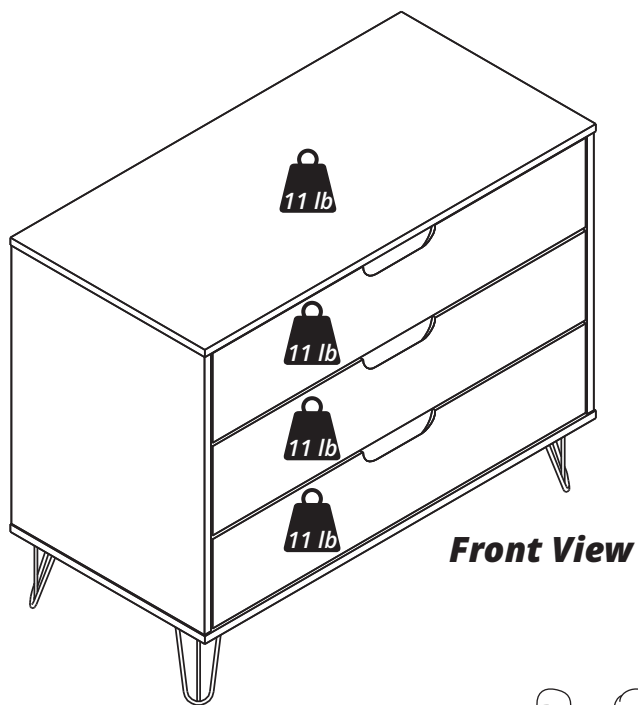


### Step 01

Fix the parts (12) under the part (01) with the hardware (A).

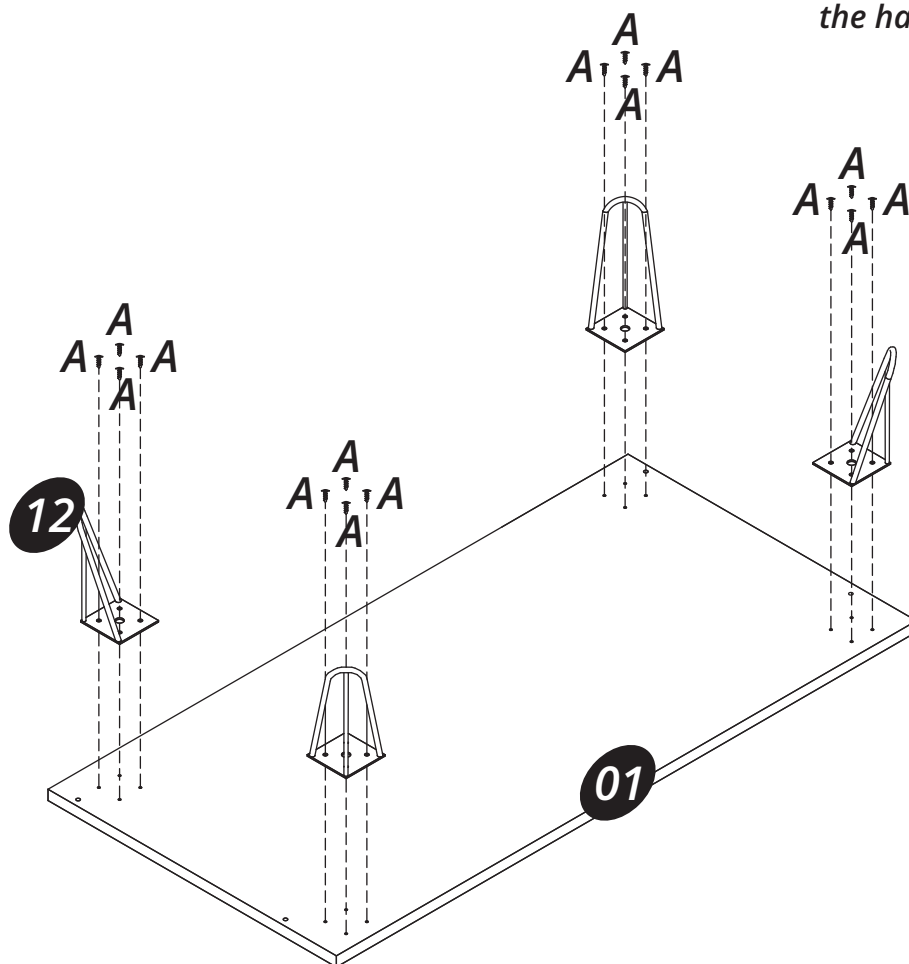


## Step 02

Connect the parts (02) and (03) onto the part (01) with the hardware (C) and the hardware (B).

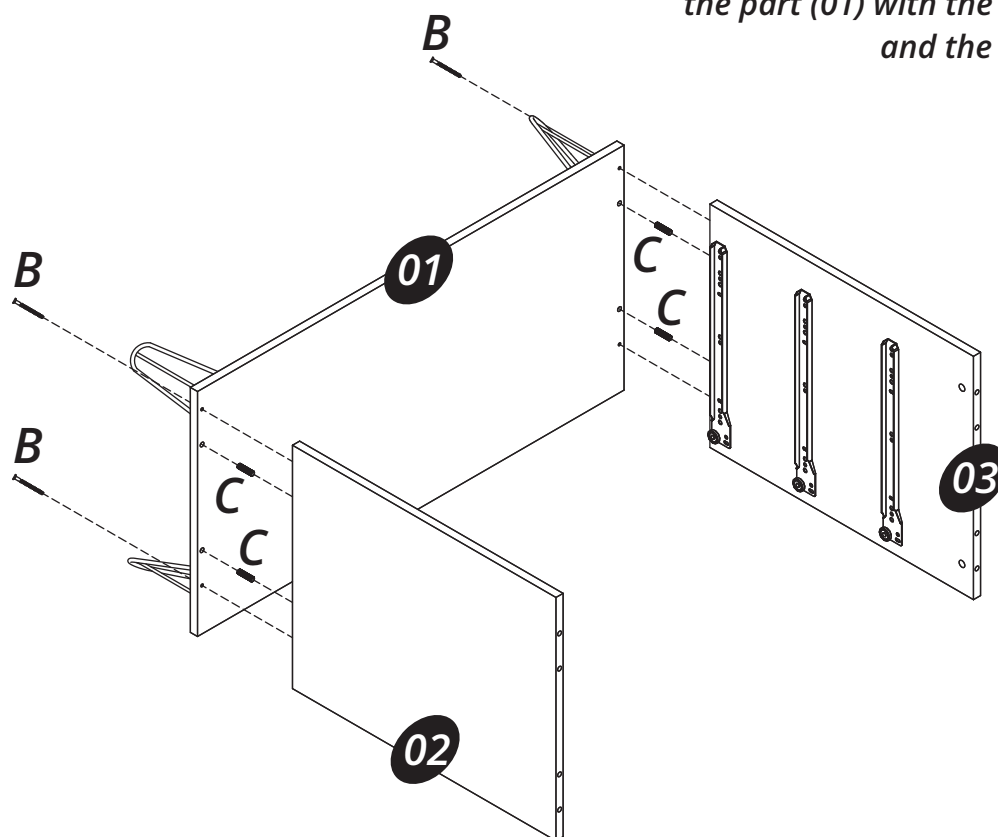



## Step 03

Connect the part (04) onto the parts (02) and (03) using the hardware (C) and the hardware (D + E).  
Apply the hardware (L) on the hardware (E).

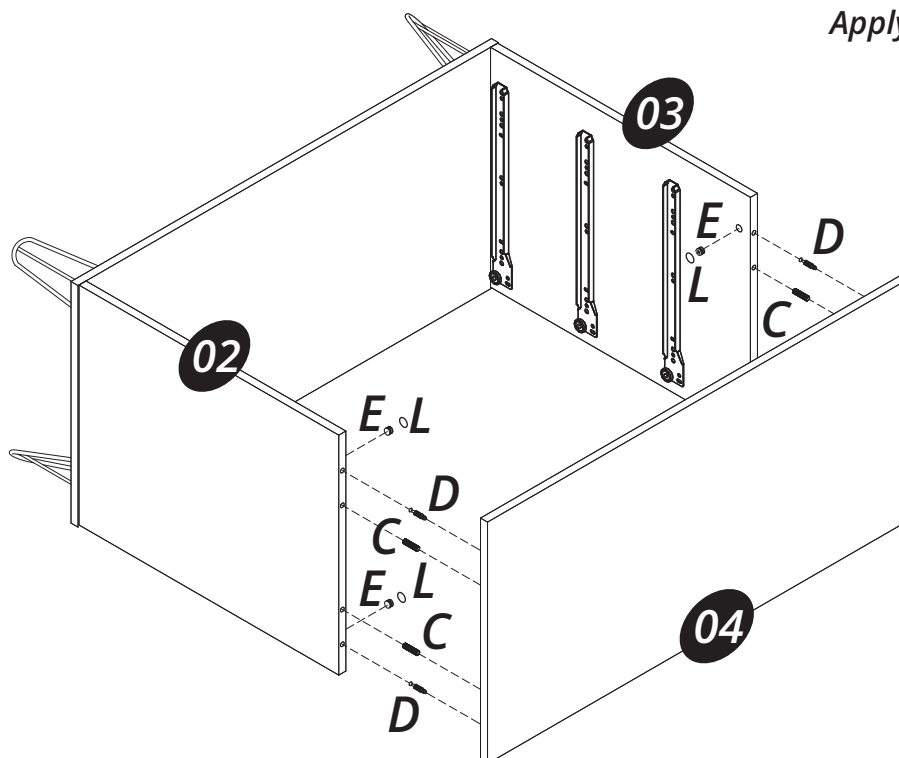


#### Step 04

Connect the part (05) and the part (13) joining with the part (14) and the hardware (G).

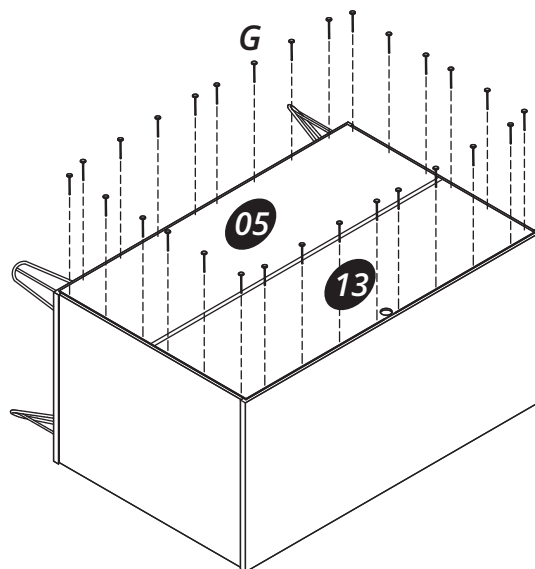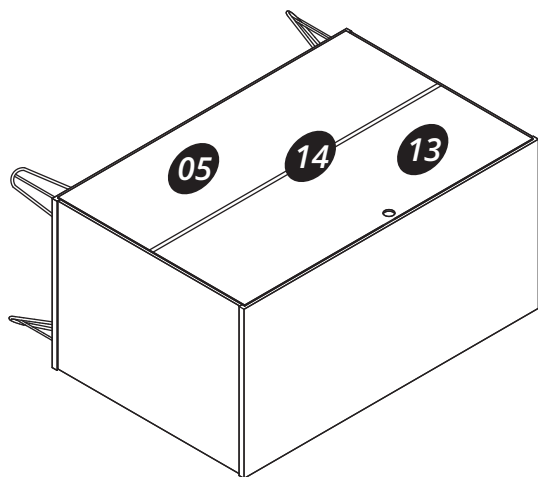


#### Step 05

Connect the part (11) onto the part (06) with the hardware (F).

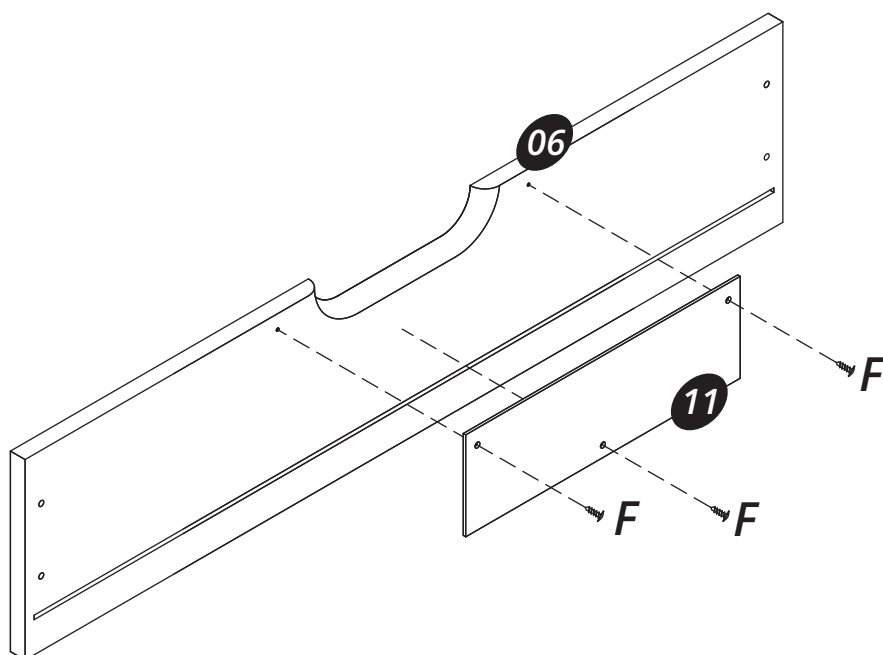


## Step 06

Connect the parts (07), (08) and (09) with the hardware (B).  
Apply the part (10) in the groove of the parts (07) and (08) until the groove of the part (09).

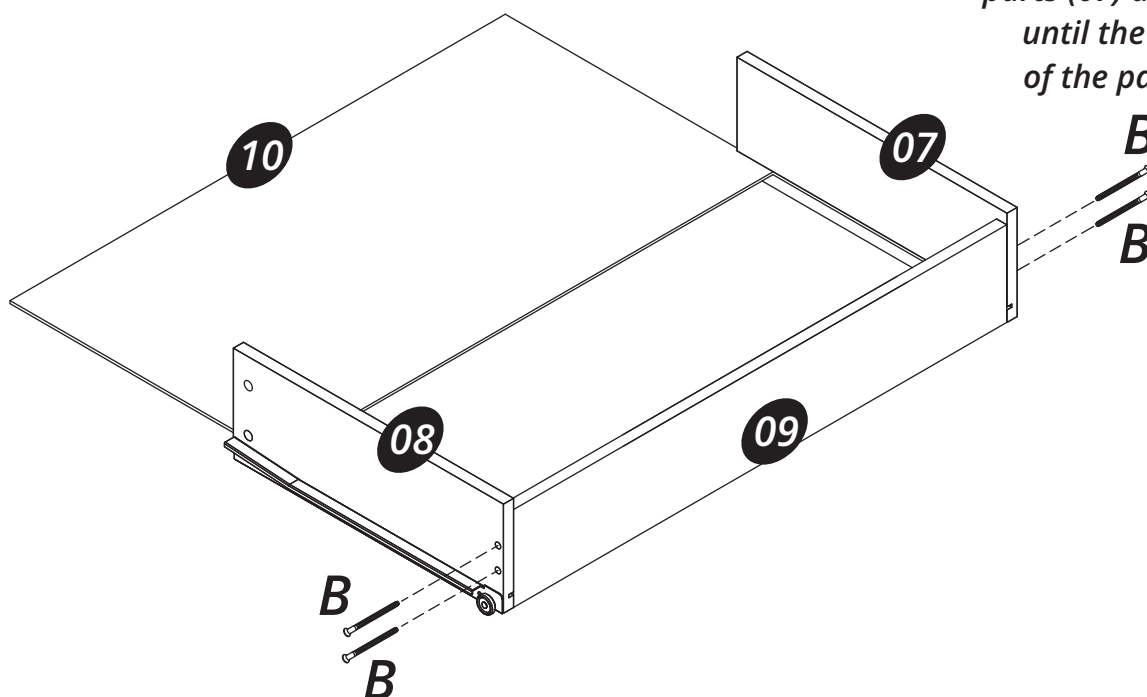


## Step 07

Connect parts (07), (08) and (06) using the hardware (D + E).  
Apply hardware (L) on the hardware (E).

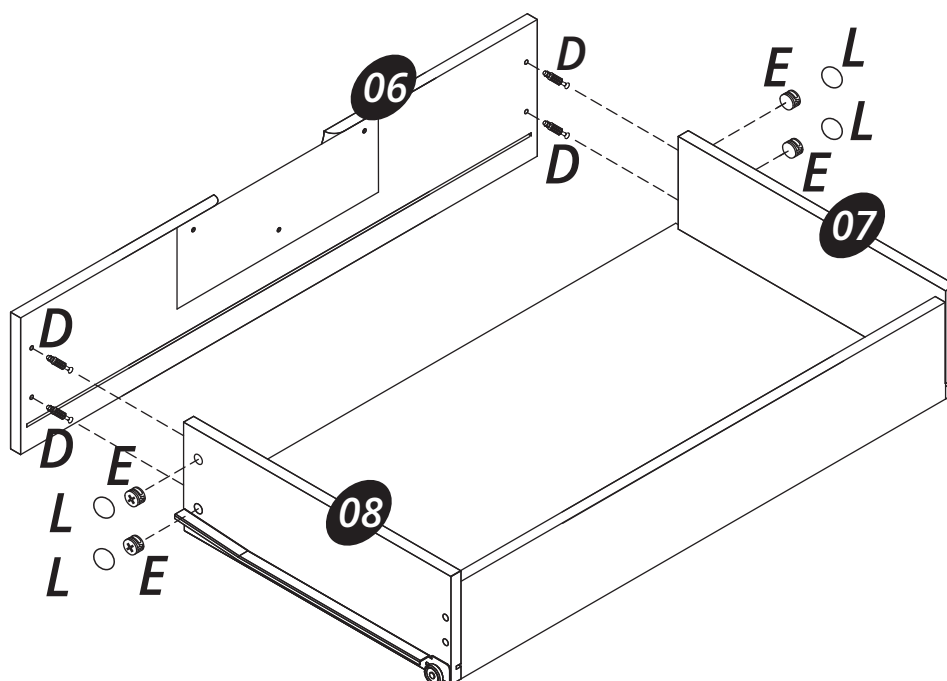


## Step 08

Use the hardware (I) with the hardware (F) as shown on detail.

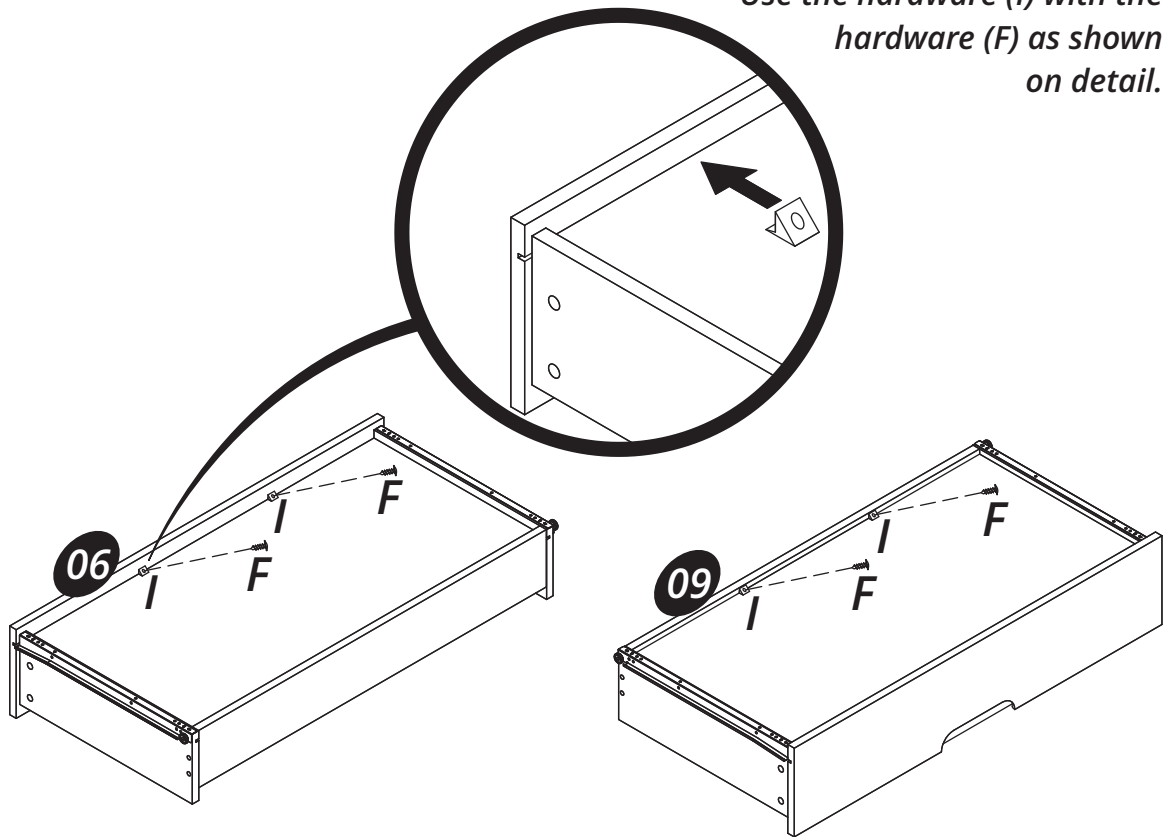

## Step 09

Install the drawer fitting it into the slides fixed on the side of parts (02) and (03).

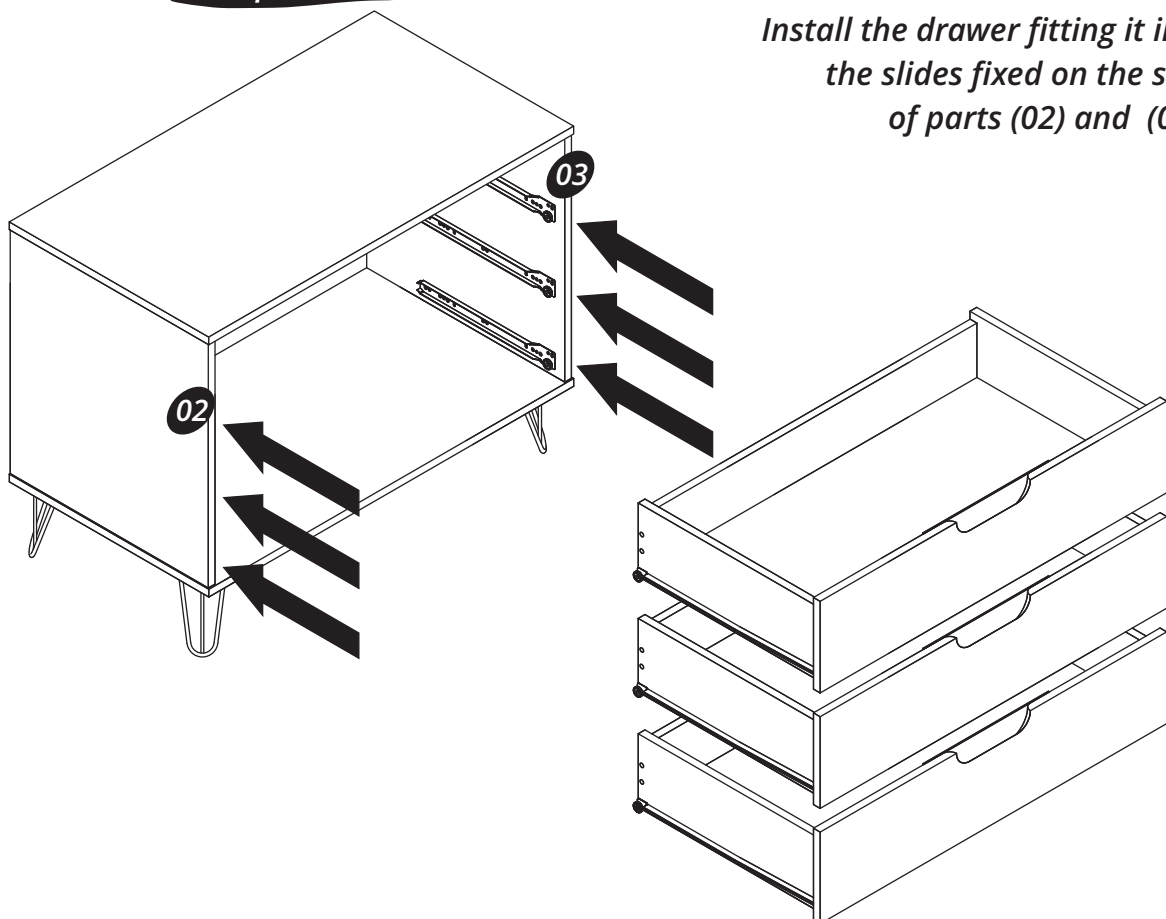


## Step 10


# Attention! Tipover System




$F = 02x$



$H = 01x$




$J = 01x$




$K = 01x$

wall

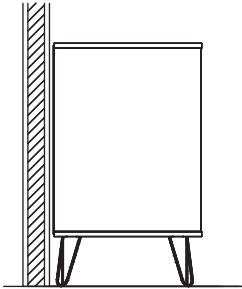


*First, approach as close as possible to the wall*

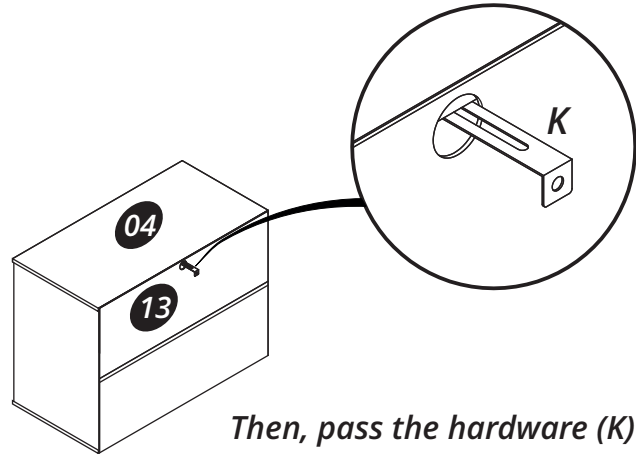


*Then, pass the hardware (K) through the hole of the part (13) as shown in the figure above. You will need a pencil to mark where you should drill the wall with a 3/8" drill bit to put in the hardware (J).*

*\*press the hardware wings (J) to put in the hole that you drilled in the wall.*

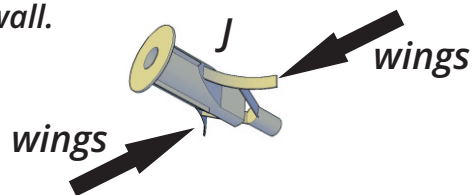

*Hardware (J), plugged in the wall.*

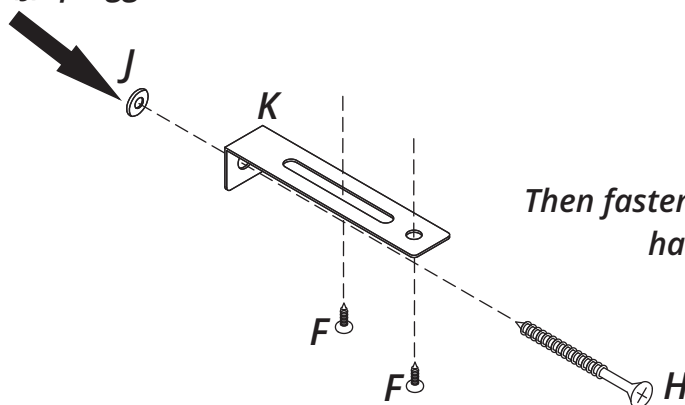

*Then fasten with the hardware (F) the hardware (K) on the part (04)*