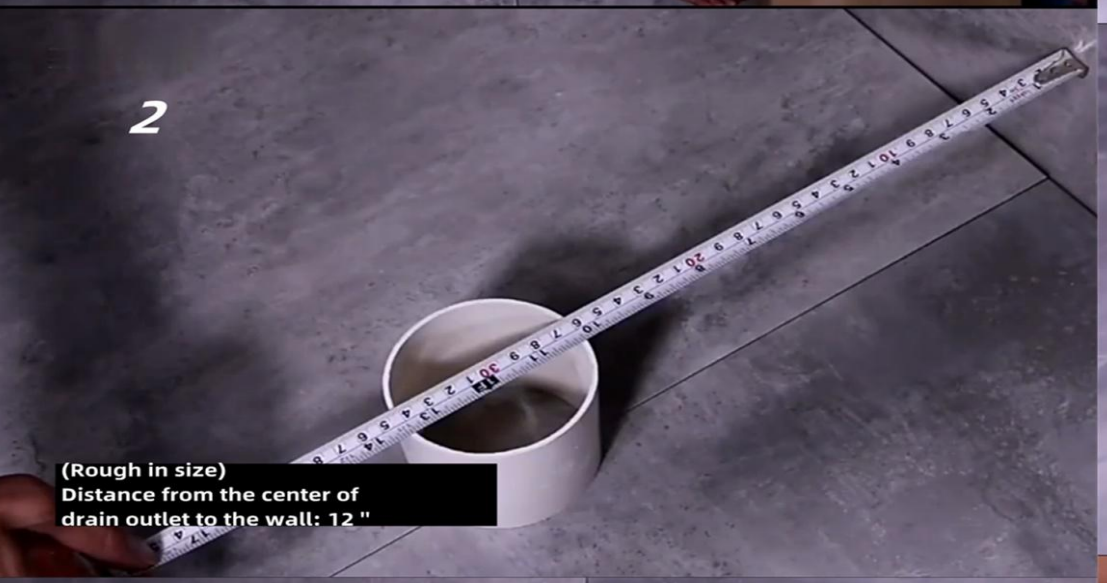
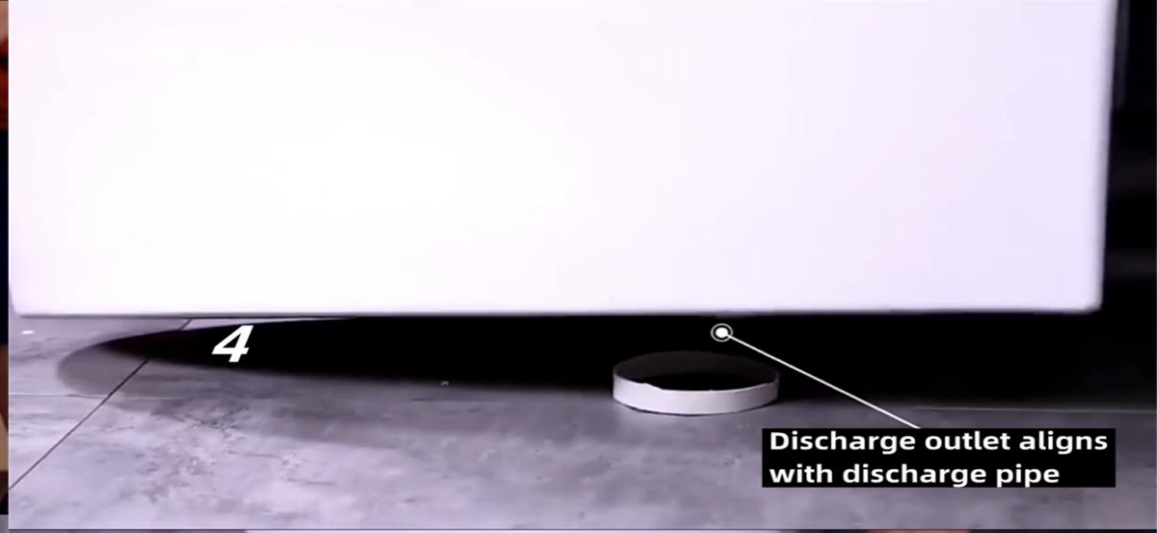

1
Lift out the toilet


2
(Rough in size)
Distance from the center of
drain outlet to the wall: 12 "


3
Drain outlet is cut to 0.2 "- 0.4"


4
Discharge outlet aligns
with discharge pipe


5
Draw a contour


6
Apply fungiproofing silica gel

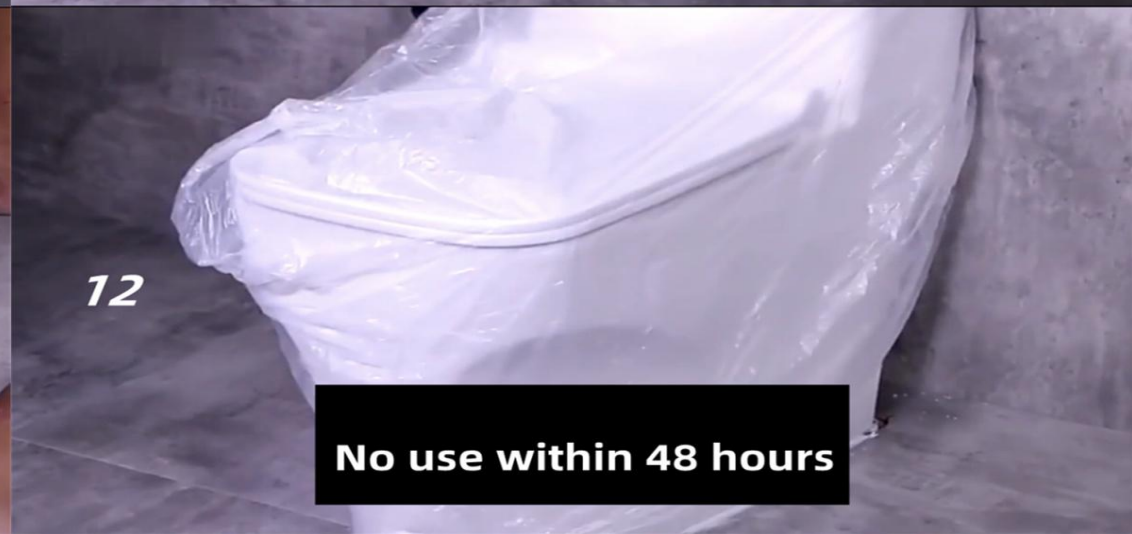

7
Apply glue evenly
on the inner side of the line


10
Apply fungiproofing silica gel
on the bottom again


8
Take out the matching flange ring
and install it to the drain outlet


11
Erase the redundant
fungipoofing silica gel


9
Put the toilet back along the line


12
No use within 48 hours

INSTALLATION INSTRUCTION



Insert the screw on the hinge base into the holes on the pan.



Tighten the setscrew but not to the end in order to adjust the seat cover properly.



Aim at the holes and adjust the hinge base to make the seat cover and pan match.



Fix the hinge base on the pan firmly.



Put the cap into the hinge base. Fix the seat cover into the hinge base, Finish.



Press the button and remove the seat cover for cleaning.