


Installation of Undermount Kitchen Sink

Use and Care Manual

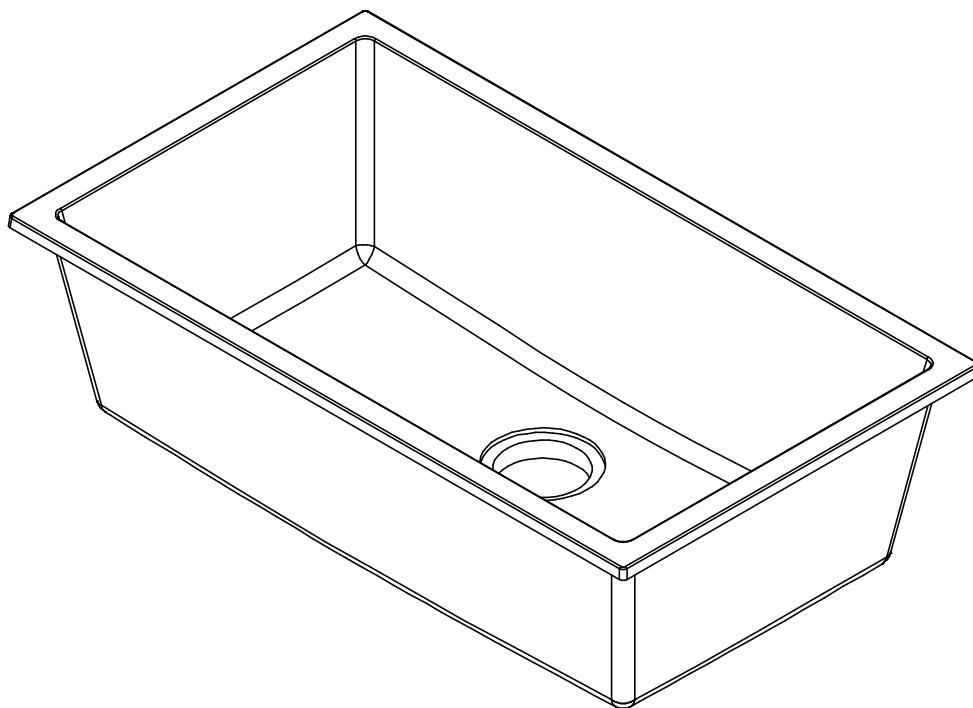


IMPORTANT:

1. We strongly recommend that the product be installed by A licensed plumber.
2. We recommend at least two people to lift or mount the sink .


INSTALLATION INSTRUCTIONS

1. Undermount installation


1. Check the cut-out template against the actual sink to ensure a proper sized cut-out, then Place the cut-out template in the desired location on the countertop. Trace the cutout template with pencil accordingly.




2. Cut the opening in the countertop by carefully following the traced line. Please use the appropriate saw that best fits your countertop material.



3. Drill Hole in Countertop. Turn the countertop over and drill 1/4" diameter x 2/7" deep hole in the countertop, mounting holes should be 1/2" from edge of the sink. Insert anchors into drilled holes and lightly tap with a hammer until flush.

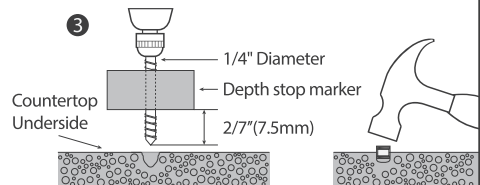

4. Secure Sink to Countertop. Use a bead of silicone (or preferred adhesive) around the rim of the sink/countertop underside. Check the alignment of the sink to the cutout in the countertop. Place sink over cutout hole and press firmly.

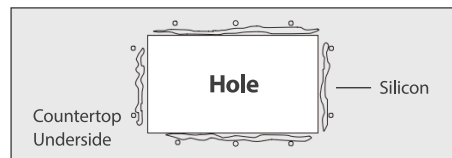


4

INSTALLATION INSTRUCTIONS

5. Attach Mounting Hardware to Secure Bowl. Remove excess sealant from inside lip. Allow sealant to set for 30 – 60 minutes.

6. Install plumbing fixtures to the sink according to manufacturer's instructions. Drain the water into the sink and check for leaks.

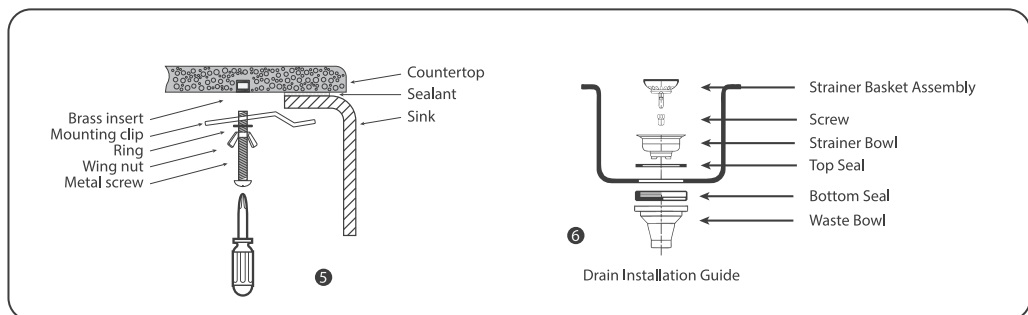

2. Drop in installation

1. Check the cut-out template against the actual sink to ensure a proper sized cut-out, then Place the cut-out template in the desired location on the countertop. Trace the cutout template with pencil accordingly.


2. Carefully cut the opening in the countertop according to the tracing line (Note: use the saw suitable for cutting the material of your countertop)

3. Clean and dry the rim surface of the sink; turn the sink upside down and apply the sealant(not included) underneath the sink rim.

4. Insert the sink into the opening, confirm that the sink fits the countertop opening, and press firmly.

5. Remove excess silicone-based adhesive, then allow the sealant to settle for 30-60 minutes.

6. Install plumbing fixtures to the sink according to manufacturer's instructions. Drain water into the sink and check for leaks.



Top-Mount Installation

MAINTENANCE INSTRUCTIONS

MAINTENANCE INSTRUCTIONS

DO:

1. Clean Daily with soft towel to wipe the sink with warm water, Mixing in some wash-er-fluid is advisable. Remember to wipe it dry.
2. If any mineral substance is built up on the sink, clean it up as soon as possible.
3. Properly remove the rust, molds, or scratches with a scouring pad. Rubbing the sink in the direction of the brush.
4. Rub it slightly with a soft towel in the direction of brushed lines

DO NOT

1. Leave water spots, utensils, or steel cool-ware in the sink for a long time, which could become rust spots on your sink surface.
2. Leave cleaning agents or bleach sitting in your sink for a long time which may cause the sink to discolor or damage the surface.
3. Use steel wool or a scouring pad to rub.
4. Leave rubber mats, cleaning pads, or sponges in the sink for a long time as this may ruin the finish of your sink.
5. Cut food in the sink.
6. The hard water may also cause rust stains.

FAQs

1. Why are there rusts in my new kitchen sink?

Reasons: Rusts and stains on a stainless steel sink can be caused by a variety of factors, including:

- 1.1 Air on pan or other metal pans are left in the sink for days.
- 1.2 Utensils or flatware are left in the sink for days.
- 1.3 Metal cans (pet food cans, vegetables cans, etc.) are left in the sink for days.
- 1.4 The water contains iron (suggestion: get an iron filter to help alleviate this issue).
- 1.5 Certain dish soaps contained by metal bottle or built-in soap dispenser.
- 1.6 Wet sponges or colored towels are left in the sink for days.

Prevention and Treatments:

- 1.1 Install the sink after all innovation project is done and clean your sink right after installation.
- 1.2 Clean your sink after each use.
- 1.3 Properly remove the rusts and molds using a scouring pad.

2. What will scratch or harm the sink?

- 2.1 Improper packaging and accessories can lead to scratch marks during transit.
- 2.2 The sink can be easily scratched by sharp objects, please use soft cloth to clean the sink.

Prevention and Treatments:

- 1.1 Minor scratch: Use a sponge with toothpaste to polish it repeatedly.
- 1.2 Moderate scratch: Use a scouring pad to polish small areas.
- 1.3 Serious scratch: Purchase stainless steel polisher.