

INSTALLATION INSTRUCTIONS

Item #N7848-711 (04/07/2020)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING THE FIXTURE (Fig.2)

1. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
2. By measuring, determine the desired hanging height and thread rods (B) into the top nipple of the fixture body.
3. Carefully pass the fixture wires through each rod and loop (C) as you assemble. Then thread the loop (C) onto the top of rods.
4. Connect loop (C) to canopy with key link (D).

MOUNTING THE FIXTURE (Fig.1)

5. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
6. Position mounting plate on the ceiling and mark the location of the anchors. Remove the mounting plate and pre-drill the holes for the anchors. Then insert the anchors into the ceiling.
7. Insert the fixture screws from the back of the mounting plate.
8. Attach the mounting plate to the outlet box using the box screws (Size: #8-32*0.5L). The side of the mounting plate marked "GND" must face out.
9. Place the self-tapping screws through the holes of the mounting plate and into the anchors to secure the mounting plate to the ceiling.
10. Hook the hook of supporting cable to the mounting strap.

CONNECTING THE WIRES (Fig. 3)




11. At this point, raise the fixture to the ceiling and connect the electrical wires as shown in Fig. 3. Be sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.

FINISHING THE INSTALLATION (Fig.1 & 2)

12. Place the fixture canopy (E) over the two fixture screws and secure with decorative nuts.
13. Place candle cover (A) on the socket.
14. Install (8) eight candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration on this manual is for installation purposes only. It may or may not be identical to the fixture purchased. Do not clean your light fixture or parts with water or cleanser.

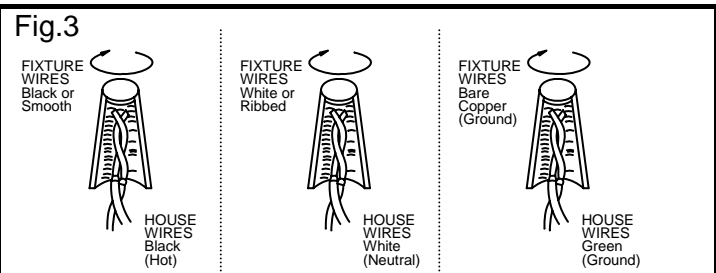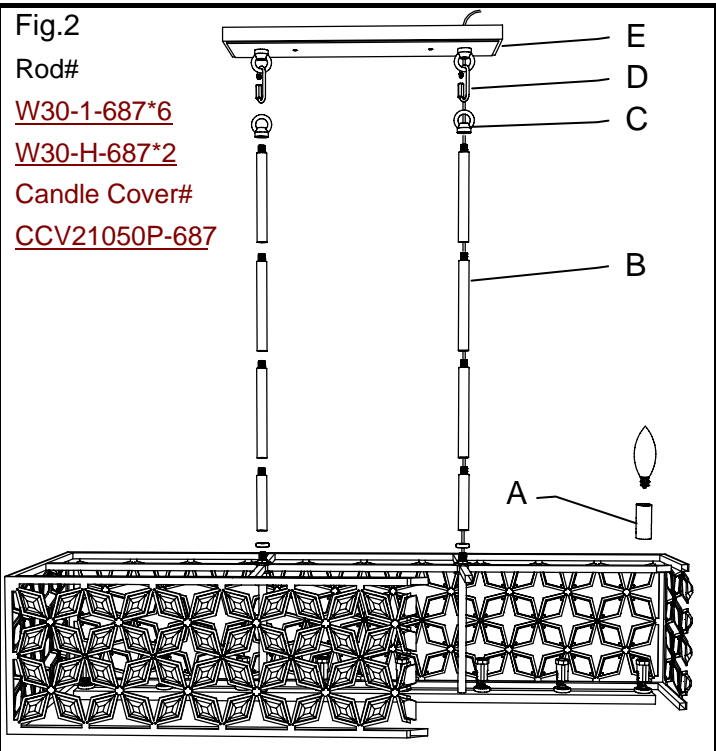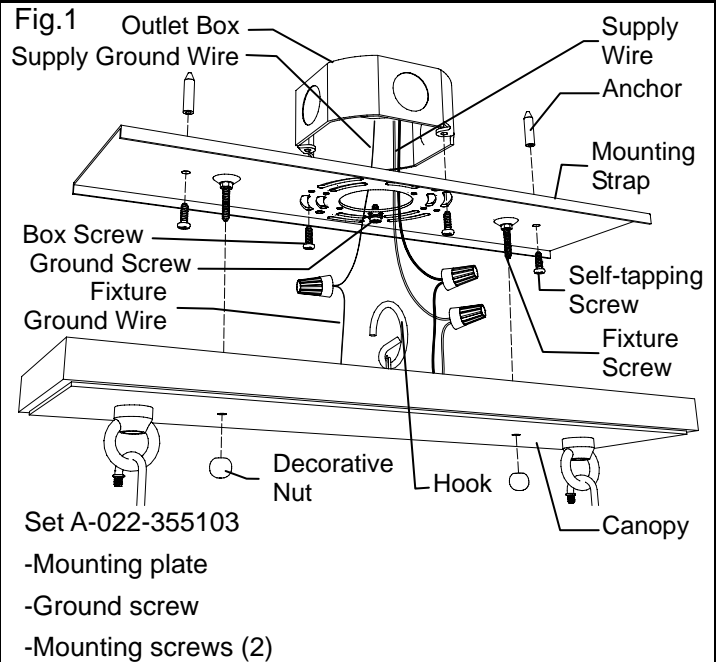

american
lighting
association