

# INSTALLATION INSTRUCTIONS

For Model 1808-01/ 1809-01



## READ AND SAVE THESE INSTRUCTIONS

These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning installation of the lighting fixture. We strongly suggest that all direct wired fixtures be installed by a qualified, licensed electrician.

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**BEFORE INSTALLATION**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

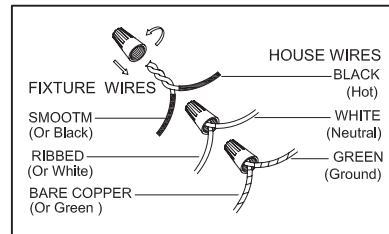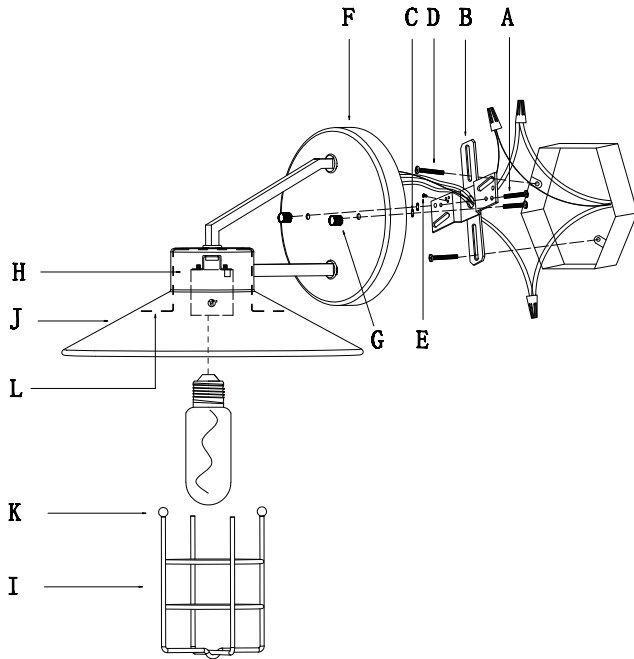

## PREPARING FOR INSTALLATION

Remove all contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old crossbar.

Crossbar (B) contains several pairs of threaded holes. Find the pair of holes that match the spacing of the holes on the junction box and on your fixture's backplate. Two of mounting screws (A) should be attached to crossbar (B). You may need to tighten the nuts (C) that hold these screws in place. Pull the house wires through the center of crossbar (B). Place crossbar (B) against the junction box so that mounting screws (A) are aligned with the hole locations on fixture's backplate (F). Secure crossbar (B) to the junction box by securely tightening the mounting screws (D).

## CONNECTING THE WIRES

Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the end of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on crossbar (B) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to tighten ground screw (E) onto the crossbar. Tuck all wires neatly into the junction box.

## FINISHING THE INSTALLATION

Place the fixture's backplate (F) over mounting screws (A) so that they protrude through the holes on the backplate. Screw deco nuts (G) onto mounting screws (A). Twist until the backplate of the fixture is snugly against the wall. Install light bulb (not included) in accordance with the fixture's specifications. Do not exceed the recommended maximum wattage. Raise iron cage (I) to the shade (J) allowing small balls (K) to protrude through key slots in the cap (L). Rotate iron cage (I) clockwise until small balls (K) lock into narrow portion of key slots.

Your installation is now complete. Turn on the power and test the fixture.

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.