





Two-Handle Widespread Lavatory Faucet Location:

Specification Submittal

Model Numbers	Feature Highlights
☐ SLW3312PP Two-Handle Widespread Lavatory Faucet with Push-Pop Drain Assembly	8" to 16" mount configuration. - Quarter-turn ceramic cartridges. 3/8" inlet connections. 24" braided supply hoses. - Metal Push-Pop drain assembly. - Standard 1.2 gpm (4.5 L/min) flow rate. - Components shall be metal construction, plated in standard Polished Chrome finish.
Options/Modifications	Warranty
☐ 05 0.5 gpm (1.89 L/min) Flow Restrictor ☐ MB Matte Black finish ☐ STN Satin Nickel finish	Limited Lifetime - for residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.
Compliance	
- ASME® A112.18.1; CSA® B125.1 - NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 - WaterSense® for 1.2 gpm Only - Lever handle meets ADA requirements - Push-Pop meets ADA requirements for operation	  




SKU Builder

Type	Series	Finish	PP	Flow Rate	Final SKU
SLW	3312	STN	PP	05	SLW3312STNPP05
SLW	3312		PP		SLW3312PP

Architectural/Engineering Specification

Symmons Solarity _____ Two-Handle Widespread Lavatory Faucet. Features 8" to 16" mount configuration with quarter-turn ceramic cartridges, 3/8" inlet connections, 24" braided supply hoses, 1.2 gpm (4.5 L/min) flow restrictor, and metal construction plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1; CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, and WaterSense compliant. Lever handle meets ADA requirements and Push-Pop meets ADA requirements for operation. Available options include: 05 = 0.5 gpm (1.89 L/min) Flow Restrictor, MB = Matte Black finish, and STN = Satin Nickel finish.

Dimensions

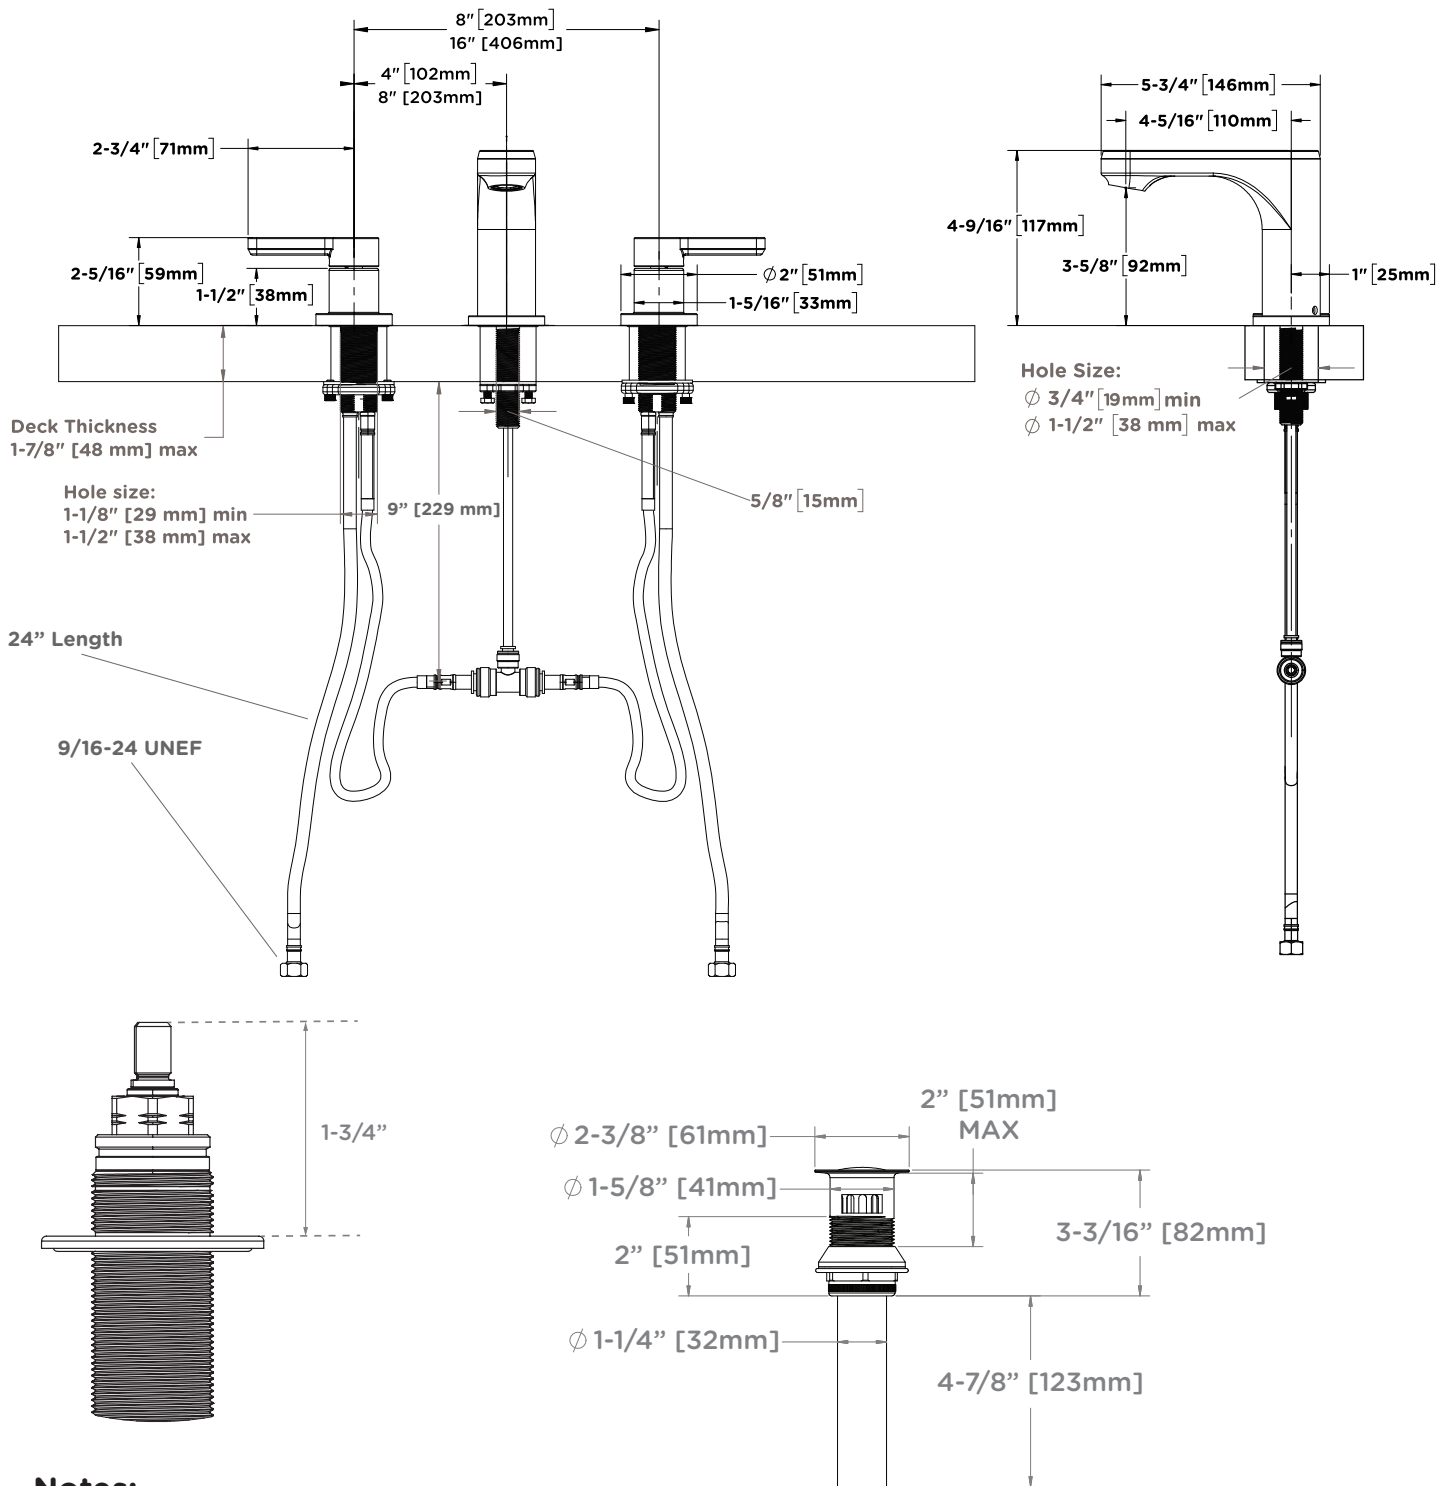

Notes:

- Flange to be set to 1-3/4"
- Dimensions subject to change without notice