

33" top-/undermount single-bowl kitchen sink kit K-R31466-1PC

Features

- 36" (914 mm) minimum base cabinet width
- Single bowl
- 9" (229 mm) depth provides generous workspace
- Rounded 0.98" (25 mm) corners are easy to clean
- Single faucet hole
- SilentShield® sound-absorption technology offers quieter performance
- Two-function pull-down sprayhead allows you to switch from aerated stream to Sweep® spray
- Sweep® spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Box includes: Sink, assembled Vibrant Stainless pull-down faucet, sink rack, drain and strainer, installation hardware

Material

- Premium 18-gauge stainless steel
- Durable material construction
- KOHLER stainless steel sinks resist corrosion and tarnishing

Installation

Top-mount or undermount

Recommended Products/Accessories

K-23726 Drain treatment K-23729 Stainless steel cleaner

Optional Products/Accessories

K-11352 Disposal Flange with Stopper

Included Components

1419715-VS Vibrant Stainless pull-down kitchen faucet K-31473 Sink rack
7400 Stainless Steel Sink Drain and Strainer



Codes/Standards

ASME A112.18.1/CSA B125.1 ASME A112.19.3/CSA B45.4 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372


KOHLER® Stainless Steel Sinks Lifetime Limited WarrantyKOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.





33" top-/undermount single-bowl kitchen sink kit K-R31466-1PC

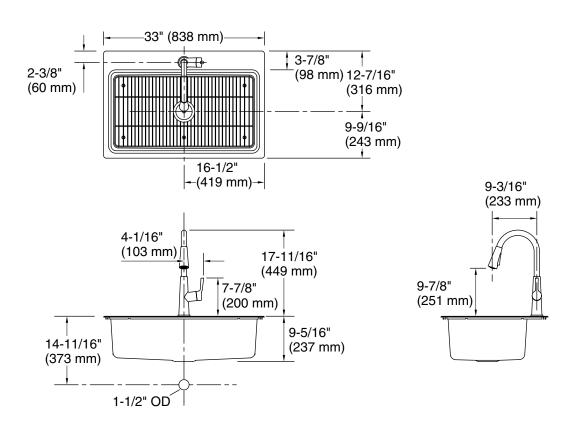

Technical Information

All product dimensions are nominal.

Basin configuration: Single Bowl

Min. base cabinet 36" (914 mm)

width:

Bowl area (Only): Length: 30" (761 mm)

Width: 16-1/8" (410 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm)

With overflow: No Number of deck 1

holes:

Faucet hole(s): 1-7/16" (37 mm)
Drain hole: 3-5/8" (92 mm)

Template: Top-mount/Undermount, 1442591-7, not

required, included

Notes

Install this product according to the installation instructions.

