



SLV Lighting North America

5022 Joanne Kearney Blvd.  
Tampa, FL 33619

Phone: 813.349.1900  
Fax: 813.349.1907

Version: A  
Release Date:  
2017-08-04

#### MAINTENANCE AND CARE:

Disconnect the product from the power supply before cleaning or maintenance.

## Installation Instructions for Surface Square LED





### SAFETY INFORMATION

1. This luminaire must be installed in accordance with National Electrical Code and local electrical and construction regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation.
2. To prevent electrical shock, turn off electricity at fuse box before installation.
3. Do not exceed product specified luminaire voltage.  
Any other source will void warranty.
4. Do not install if luminaire, parts or connectors are damaged.
5. Product must be installed with provided drivers and housings only. Use of other manufacturers' components will void warranty.

### Warning:

This product contains chemicals known to the state of California to cause cancer, birth defects, and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

- 1.- Align and attach plate to junction box. (Plate must be firmly secured against ceiling).
- 2.- Connect wire mains line wires to correct wires from luminaire:  
(Green or bare copper wire from junction box  
to ground wire from luminaire,  
white wire from J-box to white wire from luminaire  
or neutral labeled wire.  
Black wire from J-box to black wire from luminaire or wire labeled line.
- 3.- Apply a bead line of caulking around the inside perimeter for wet locations.
- 4.- Insert fixture into mounting plate aligning its clips with the mounting plate openings and pushing upwards while being careful not to pinch the wires.

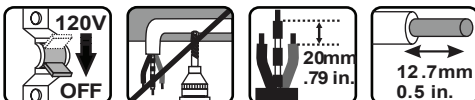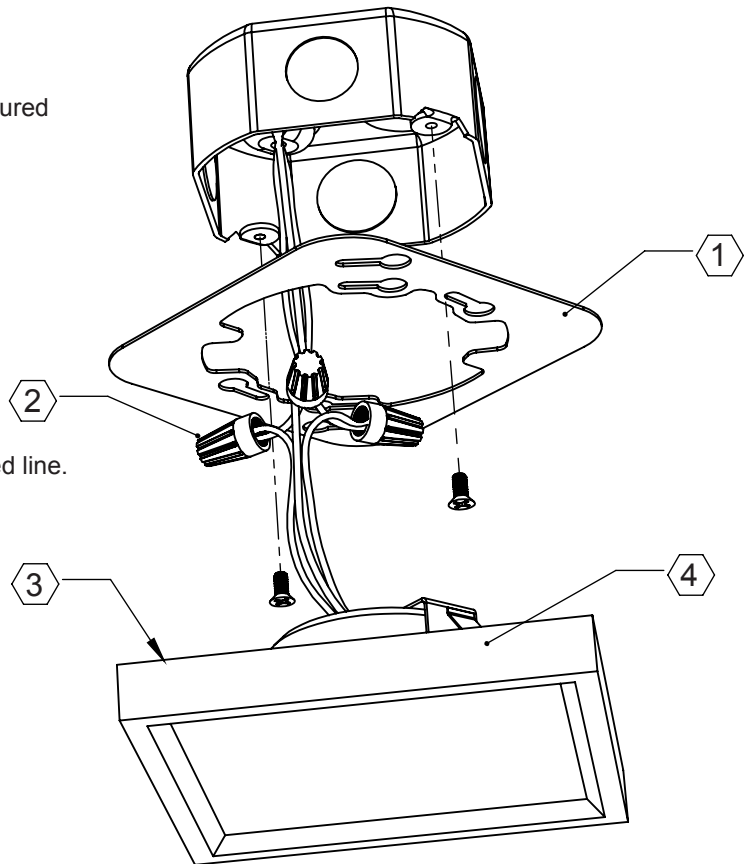

701301U	LED 974lm (±5%)	2700K	CRI 90	Ø161 [6.34"] x 161 [6.34"]	1.07lbs	0.49kg
701302U	LED 994lm (±5%)	3000K	CRI 90	Ø161 [6.34"] x 161 [6.34"]	1.07lbs	0.49kg
701303U	LED 1040lm (±5%)	3500K	CRI 90	Ø161 [6.34"] x 161 [6.34"]	1.07lbs	0.49kg

701311U	LED 702lm (±5%)	2700K	CRI 90	Ø137 [5.39"] x 137 [5.39"]	0.96lbs	0.44kg
701312U	LED 714lm (±5%)	3000K	CRI 90	Ø137 [5.39"] x 137 [5.39"]	0.96lbs	0.44kg
701313U	LED 771lm (±5%)	3500K	CRI 90	Ø137 [5.39"] x 137 [5.39"]	0.96lbs	0.44kg