

7112D60 ASSEMBLY INSTRUCTIONS

Please read carefully and save these instructions, as you may need them later. CAUTION!

Turn off the main power at circuit breaker before installing the fixture, in order to prevent possible shock. All glass is fragile, use care when handling . The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors which cannot be built into any product.

These factors must be applied by the person(s) caring for and operating the fixture.

Power connection to be made by qualified personnel in accordance with the National Electrical Code. Please connect power according to the table below.

Fixture Conductor Marking

"L" Live Conductor [Black or Brown]

"N" Neutral Conductor [White or Blue]


"⊕" Ground Conductor [Green or Bare]

Connect to AC Power Conductors

"L" Line Voltage Conductor[Black]

"N" Neutral Conductor [White]

"⊕" Ground Conductor [Green or Bare]

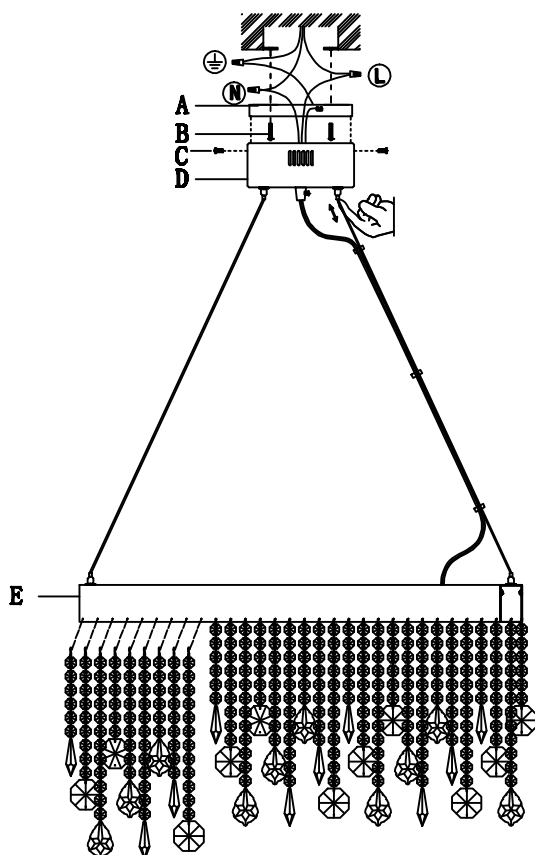

A1	B2	C3	B1	C2	A3	C1	A2	B3
10+1PCS	10+1PCS	10+1PCS	10+1PCS	10+1PCS	10+1PCS	10+1PCS	10+1PCS	10+1PCS

Installation instructions: Pendant lamp

Step 1. Twist the brass ground wire "E/⊕" with the M4 green threaded screw on the mounting bracket and lock it to the GND position. Then twist the two ground wires together (one is the brass ground wire "E/⊕", the other is the ground wire from the junction box, and tighten it by the terminal nut.

Step 2. Black wire from junction box attaches to "L" wire for the fixture by terminal nut; white wire attaches to "N" wire by terminal nut. PS: How to adjust the wire: adjust the length of the wire to the length you want. 1-Shorten the length of the wire: pull up from the end of the wire behind the ceiling to shorten the length of the wire. 2-Increase the length of the wire: press the nipple on the canopy (D) with your finger, then pull down the wire to increase the length of the wire.

Step 3. Use the two screws (B) secure long mounting bracket (A) to the junction box.

Step 4. Use the screw nut (C) secure canopy (D) to the mounting bracket (A).

Step 5. Hang the crystal strings (A1/B2/C3/B1/C2/A3/C1/A2/B3) on the lamp body in order from the inside to the outside respectively.