




DARE TO DIY DIFFERENTLY

Liquid Rubber Driveway Restore is the ideal solution for homeowners looking for something more substantial than the standard driveway tar, but not wanting to spend the time and money to re-asphalt your driveway. This hard yet flexible coating is based on the Liquid Rubber asphalt chemistry that combines our long-lasting, high performance waterproofing membrane with specialized aggregates to help handle the vehicle traffic. The end result is a sharp looking driveway that will last multiple times longer than the standard driveway coating and fill in small alligator cracks, all in an easy **Do-It-Yourself** application.

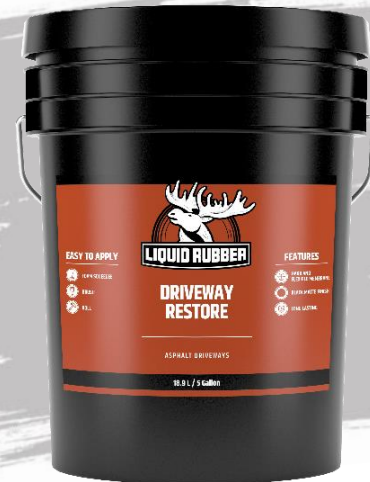

LIQUID RUBBER DRIVEWAY RESTORE PERFORMANCE FEATURES

- Durable, Waterproof Surface
- Excellent Adhesion to Most Substrates
- No VOC's, Solvents or Harmful Odors
- Resists Cracking & Chipping
- Maintains a Hard Surface With Flexibility
- No Specialized Equipment Needed
- High Quality Alternative to Hot Applied Products



APPLICATION EQUIPMENT

Liquid Rubber Driveway Restore is applied using a foam squeegee, roller, or broom to provide a seamless and fully adhered protective coating to your asphalt driveway. **Liquid Rubber Driveway Restore** will waterproof, protect, and revitalize your aging driveway.

+1 855-592-1049 | support@shopliquidrubber.com | shopliquidrubber.com

The information contained herein is the best available to Liquid Rubber Canada Inc. and its affiliated companies relating to Liquid Rubber products and the use of Liquid Rubber products. It is based on tests believed to be reliable. There is no warranty expressed or implied in association with product use. Liquid Rubber Canada Inc. assumes no liability for any damages incurred in association with the use of Liquid Rubber Canada Inc. products. Information is subject to change without notice.



DRYING TIME

At 25°C and 50% relative humidity, **Liquid Rubber Driveway Restore** fully cures in 48 hours. Curing time increases with thickness, in colder temperatures or higher humidity so environmental conditions must be considered before application.



SUITABLE APPLICATIONS INCLUDE BUT ARE NOT LIMITED TO

- Topcoat & Revitalize Asphalt Driveways
- Fill Small Cracks & Crevices On Asphalt Driveways



PHYSICAL PROPERTIES

Color (Liquid)	Brown to Black
% solids (wt) (Liquid)	76.35% (wt)

Elongation	>200%
Low Temp Flex	-7°C

LIMITATIONS & WARRANTY

- Do not apply to dirty or contaminated surfaces
- Do not apply below 10°C/50°F
- Avoid contact with solvents and solvent type adhesives
- Do not apply over coal tar

PACKAGING

- 18.9 L (5 Gal.) Pails