



Two-piece elongated toilet, 1.28 gpf K-3999-U

### **Features**

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Left-hand Polished Chrome trip lever
- Insuliner® tank liner minimizes condensation on the tank
- Combination consists of the K-4467-U tank and the K-4199 bowl
- Eligible for consumer rebates in some municipalities
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- Class Five® canister optimizes the flow out of the tank, harnessing gravity and the natural powerful reducing cascade of water to increase the power and effectiveness of the flush

### Installation

- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Seat and supply line sold separately

### Recommended Products/Accessories

K-5588 Purefresh® Deodorizing elongated toilet seat K-4108 PureWash® E750 Elongated bidet toilet seat with remote control

K-5420 Low-Profile Bolt Caps

K-9379 Trip Lever

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-23726 Drain treatment

K-4639-RL Cachet® ReadyLatch® Quiet-Close™ round-front toilet seat

K-4636-RL Cachet® ReadyLatch® Quiet-Close™ elongated toilet seat

## Included Components

K-4467 Toilet tank, 1.28 gpf K-4199 Elongated toilet bowl



ADA CSA B651

ОВС



### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC IAPMO Certification

# KOHLER® Toilets and Seats Limited Warranty


See website for detailed warranty information.





# **KOHLER**

# Two-piece elongated toilet, 1.28 gpf K-3999-U

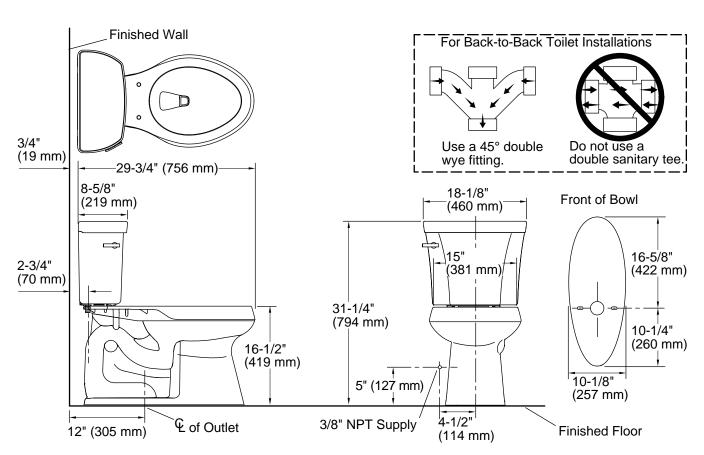

## **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: Class Five
Trap passageway: 2-1/8" (54 mm)

Water surface size: 11-3/8" x 8" (289 mm x 203 mm)

5-3/8" (137 mm)

Rim to water

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

