SYMMONS[®] Braston[®]

S5892TRM Tub/Shower Trim

Specification Submittal

Model Numbers				Feature Highlights				
	S5892TRM Tub/Shower Trim Valve Options: -S262 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier -S162 Series Temptrol® VersaFlex™ Shower Valve requires TC modifier	•	 Requires Temptrol VersaFlex Pressure-Balancing Shower Valve. Integral diverter control. Metal lever handle. 7" non-diverter tub spout. 7-mode HydroMersion™ showerhead with NPSO. 2.0 gpm (9.5 L/min) flow restrictor. 					
С	Compliance			Modifications				
•	ASME A112.18.1 / CSA B125.1. WaterSense 1.5 gpm (5.7 L/min) / 2.0 gpm 🌑 💽 🛃		15	CG	1.5 gpm (5.7 L/min) flow restrictor			
	(7.6 L/min).		L1		Less showerhead			
•	Lever handle meet ADA requirements for operation.				Less head, arm and flange			
			L7		Less handle			
Warranty Limited Lifetime - for residential installations. 10 Years - for commercial/industrial installations.					Test Cap Trim (includes TA-10 & T-12A) used with S162 Series Temptrol VersaFlex Shower Valve			
					Brushed Bronze finish			
					Matte Black finish			
Refer to www.symmons.com/warran-			STN		Satin Nickel finish			
τy	for complete warranty information.	N	Note: Append appropriate suffix to model number.					

Location:


SKU Builder

Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S5892	MB	L1		TRM	ТС	S5892MBL1TRMTC
S5892	MB			TRM		S5892MBTRM

Note: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Braston® Tub and Shower Trim ______ Includes Braston® Tub/Shower Trim powered by Temptrol VersaFlex Pressure-Balancing Shower Valve, integral diverter control. Features inculde metal lever handle, 7" non-diverter tub spout, 7-mode HydroMersion™ showerhead with NPSO, 2.0 gpm (9.5 L/min) flow restrictor. Components made from metal and nonmetal materials, plated in standard Polished Chrome finish. 10 Year Commercial Warranty. ASME A112.18.1 / CSA B125.1 and WaterSense 1.5 / 2.0 complaint. Lever handle meet ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L4 = Less head, arm and flange, L7 = Less handle, TC = Test Cap Trim, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

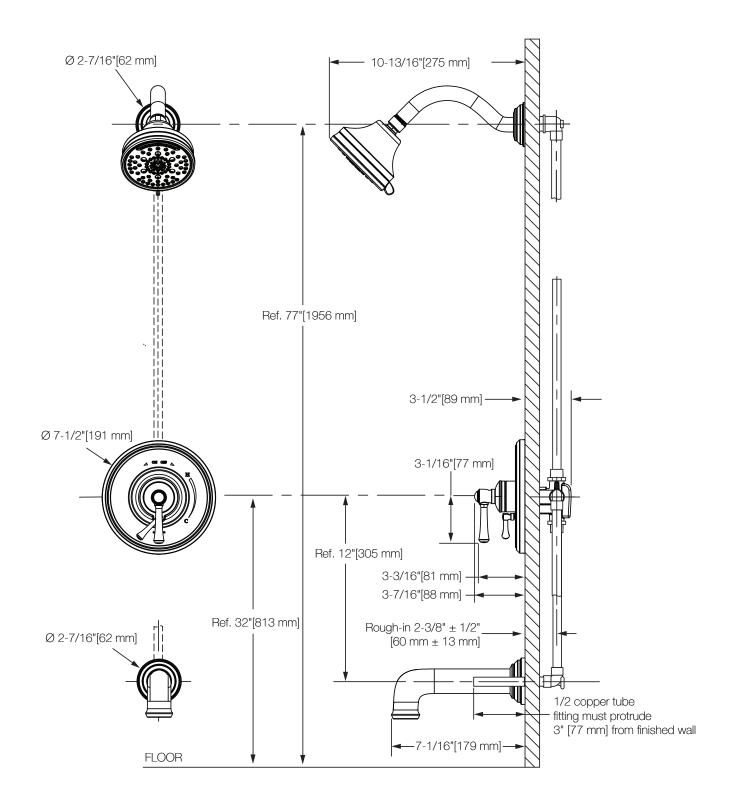

Notes:

1) All dimensions measured from nominal rough-in (see $2-3/8" \pm 1/2"$ [60 mm \pm 13 mm] as reference).

2) Dimensions are subject to change without notice.