

DESCRIPTION

The Halo RL4 Deep Baffle is a complete LED Baffle-Trim Module for 4-inch aperture recessed downlights; suitable for new construction, remodel and retrofit installation. The regressed lens provides uniform illumination and wet location listing. Precision construction makes any housing AIR-TITE for added savings and code compliance.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

MODULE - TRIM

- Module construction includes LED Array, heat sink, reflector, lens, baffle and trim ring.
- Regressed Coilex baffle
- Heat sink designed to conduct heat away from the LED Array, keeping the junction temperatures below specified maximums, even when installed in insulated ceiling environments.

LED ARRAY

- Mid power LED array provides a uniform source with high efficiency and no pixilation.
- 90 CRI minimum, R9 greater than 50
- Color accuracy within 3 SDCM provide color accuracy and uniformity

OPTICAL ASSEMBLY

- Regressed lens
- Impact-resistant polycarbonate
- Convex form and lamp-like appearance
- Diffuse for even illumination

BAFFLES

- Each unit comes with a white baffle insert and black baffle insert.

DRIVER

- Integral 120V 50/60 Hz constant current driver provides noise free operation
- Continuous, flicker-free dimming from 100% to 5%.
- Inline electrical quick connect and E26 adapter (provided) provides mains connections
- Consult instruction sheets and quick start guide for more information

RETENTION

- Precision formed spring blades secure module with friction fit to compatible housings.
- Friction blade design allows the RA4 to be installed in any position within the housing aperture (360 degrees)

GASKETS

- Closed cell gaskets achieve restrictive airflow requirements without additional caulking

COMPLIANCE

- UL Certified
- Wet and Damp location listed
- Airtight certified per ASTM-E283
- Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements
- EMI/RFI emissions per FCC 47CFR Part 15 consumer limits
- Contains no mercury or lead and RoHS compliant
- Photometric testing in accordance with IES LM-79-08
- Lumen maintenance projections in accordance with IES LM-80-08 and TM-21-11
- Can be used for State of California Title 24 high efficacy luminaire compliance. Complies with Title 24 JA8-2016-E.
- Can be used International Energy Conservation Code (IECC) and Washington State Energy Code high efficiency luminaire compliance.
- ENERGY STAR® listed, reference database for current listings
- Meets State of California voluntary lamp standards
- Lighting Facts labeled

WARRANTY

- Five year limited warranty, consult website for details. www.cooperlighting.com




RL4 Deep Baffle

**4-Inch All-Purpose LED
Retrofit Module
600 Lumen Series**

**FOR USE IN
INSULATED CEILING
AND NON- INSULATED
CEILING RATED
HOUSINGS**

**HIGH-EFFICACY LED
WITH INTEGRAL
DRIVER - DIMMABLE**

DIMENSIONS

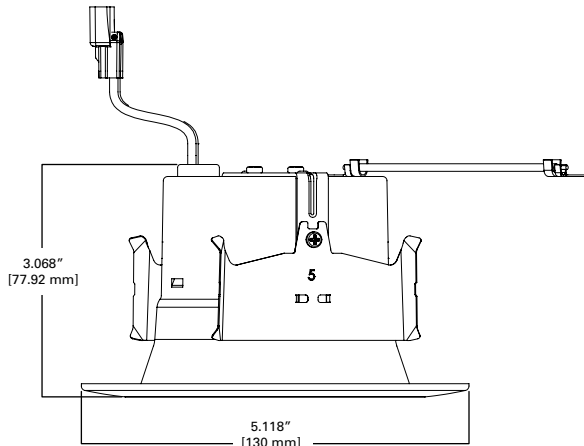

Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



ENERGY DATA @ 3000K

Lumens	681
Wattage	8.5W
Input current	0.073A
Efficacy	80.1 LPW
THD	17.5%
Frequency	60 Hz
T Ambient	-30 - +40°C
Voltage	120V
Sound Rating	Class A
Power Factor	0.99

ORDERING INFORMATION

SAMPLE NUMBER: RLD4069301EWH
A complete luminaire consists of a housing, and LED module, order separately.


Models	Lumens	CRI / CCT	Driver	Finish	Accessories
RLD4 = 4" deep baffle retrofit LED module	06=600 lumen (nominal)	930=90 CRI minimum, 3000K CCT	1E= 120V 50/60Hz leading or trailing edge phase cut 1% dimming	WH= matte white trim, white baffle and black baffle included	

Housings

Halo Ultra-shallow LED Housings
H245ICAT=4" IC, airtight ultra-shallow new construction housing, LED, 120 - 277V
H245RICAT=4" IC, airtight ultra-shallow remodeler housing, LED, 120 - 277V
Halo LED Housings
H995ICAT=4" IC, airtight shallow new construction housing, LED, 120 - 277V
H995RICAT=4" IC, airtight shallow remodeler housing, LED, 120 - 277V
E995ICAT=4" IC, airtight shallow new construction housing, LED, 120 - 277V
E995RICAT=4" IC, airtight shallow remodeler housing, LED, 120 - 277V
Halo Housings
H99TAT=4" non-IC, airtight shallow new construction housing, E26, 120V
H99RTAT=4" non-IC, airtight shallow remodeler housing, E26, 120V
H99ICAT=4" IC, airtight shallow new construction housing, E26, 120V
E4TATSB=4" non-IC, airtight shallow new construction housing, adjustable socket bracket, E26, 120V
E4RTATSB=4" non-IC, airtight shallow remodeler housing, adjustable socket bracket, E26, 120V
E4ICATSB=4" IC, airtight shallow new construction housing, adjustable socket bracket, E26, 120V

Photometric Data

RLD4069301EWH		
Luminaire lumens		681
Input watts		8.5
LER (LPW)		80.1
Spacing Criteria	0-180	1.08
	90-270	1.08
	Diagonal	1.04
Beam angle (degrees)		70.3
Field angle (degrees)		117.4
Zonal lumen	Lumens	% Lumens
0-30	343	50.3
0-40	492	75.5
0-60	629	92.4
0-90	681	100

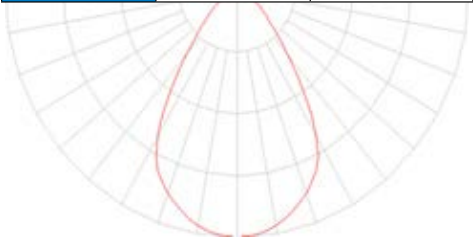

* Tested in accordance with IES LM63. Field results may vary.

Color Metric Summary

TM-30-15	R _r = 91
	R _g = 99
CRI/CIE	R _a = 92
	R ₉ = 67.4



CCT - Range of 2700K- 5000K



Product Specifications

PRODUCT SPECIFICATIONS	
Lumens	681
Watts	8.5
Lumens Per Watt (Efficacy)	80.1
Color Accuracy (CRI)	91
Light Color (CCT)	3000K
Correlated Color Temperature (CCT)	
2700K	3000K
4500K	6500K

Performance metrics are measured using white baffle.