


SAFAVIEH LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:PND4095A



Care and Cleaning



To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Top frame		1X	N	mounting bracket		1X
B	Flat head Phillips screw		16X	O	Machine Screw		2X
C	Frame support rod		4X	P	Machine Screw		2X
D	Bottom frame		1X	Q	ground screw		1X
E	Hex nut		2X	R	wire connector		3X
F	Lamp holder		2X	S	bulb		8X
G	6" rod		2X	K	Hex nut		2X
H	6"rod		2X	U	screwdriver		1X
I	12"rod		4X	V	wrench		1X
L	Rectangular canopy		1X	W	Expansion tube		2X
M	Screwed Ball		2X	X	Self tapping screw		2X

Installation


Step 1

Fixed top frame(A)and bottom frame(D) with Frame support rod(C) by Flat head Phillips screw(B)

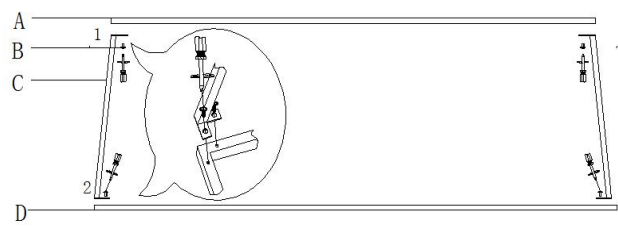

Step 2

Pass lamp holders(F) through top frame(A),then use wrench tighten hex nut(E).

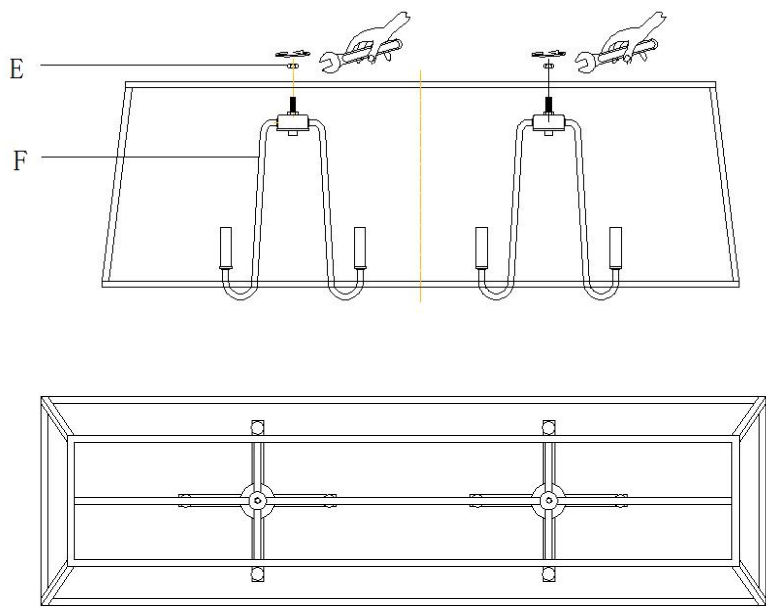

Step 3

Pass the wire through rod(I)(H)(G),then fasten the rod on (J) and fix it on rectangular canopy(L) by hex nut(K).


Step 4

Install the mounting braket(N) to the junction box with machine screw (P).

Step5

Make wire connections, with wire connectors(R), following the reference chart listed below.

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



Grounding Instructions:

a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.


b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 6

Fixed the rectangular canopy(L) with mounting bracket(N)by screwed ball(M).

Step 7

Install bulb(L). Be sure to use light bulb(s) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.

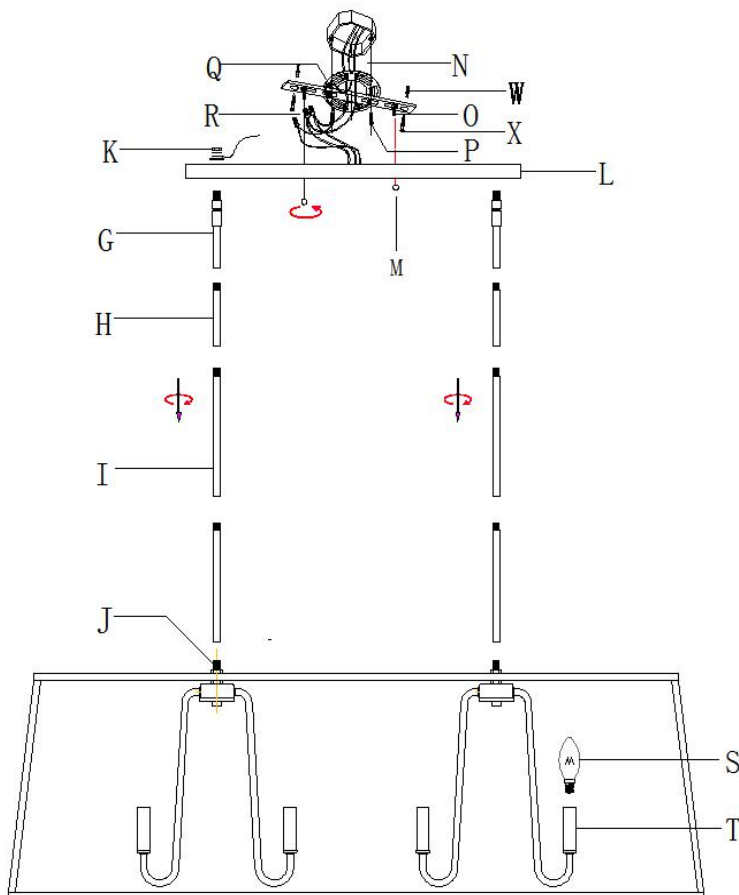

PLEASE USE TYPE"B" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED BULB MAX 9-WATT

THERE ARE 8PCS LED 4 WATT BULB IN THE BOX

Consult a qualified electrician to ensure correct branch circuit conductor.

ENJOY YOUR LAMP