# H


NO.	Image	Description	QTY	NO.	Image	Description	QTY
н		1*M8x65mm FLAT HEAD SCREW 2*M8 SPRING WASHER 2*M8 FLAT WASHER 1*M8 SPACER 1*M8 NUT	4	Ľ		1*M8x45mm FLAT HEAD SCREW 2*M8 FLAT WASHER 1*M8 NUT	2
T)		1*M8x35mm STUD BOLT 1*M8 SPRING WASHER 1*M8 FLAT WASHER 1*M8 NUT	4	М		1*WRENCH	ä
J	101	1*M8x15mm FLAT HEAD SCREW 1*M8 FLAT WASHER 1*M8 ABS PLASTIC 1*M16 FLAT WASHER	2	N		2*ALLEN WRENCH	2
К	行名	1*M8x45mm FLAT HEAD SCREW 2*M8 FLAT WASHER 1*M8 NUT	2	0		1*SOCKET WRENCH	1

## **Installation steps**

### **Note: PLEASE DO NOT OVER TIGHTEN**

(Aluminum is soft metal; Over tightening may strip thread or break parts)


1. Connect seat (A) to one of the arms (D) with (H).

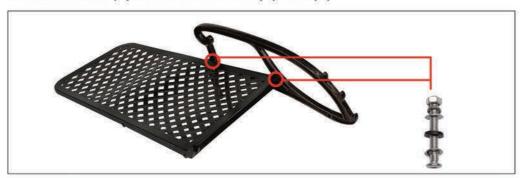


2. Connect 2 arms with wheel axe, and then connect seat (A) to another arms (D)




3. Fix 2 legs to seat with (I).

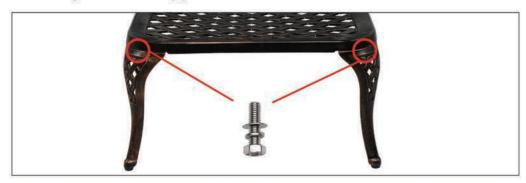


### 4. Connect Wheels (G) to the arms (D) with (J).

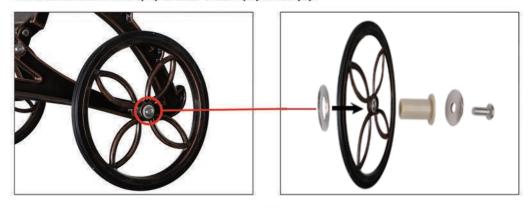

### 5. Connect Back (B) & Supporting axe (E) with (K).

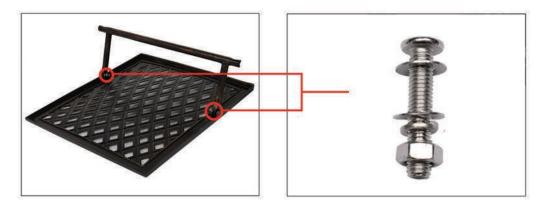

# 6. Connect seat (A) with back (B) with (L). Adjust the foot pads to stand evenly

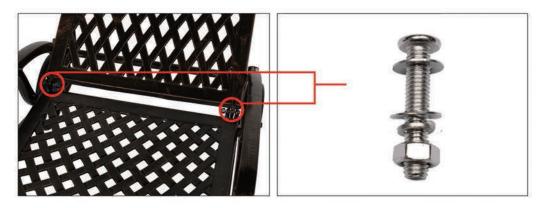

# **Chaise Lounge Installation Instruction**

### **CAUTION:**

- ·Please read the instruction manual carefully before assembling it.
- ·Please assemble strictly in accordance with the instruction.
- ·Please double check to the ensure that all parts of the package contents intact.

