

STAINLESS STEEL WASHING MACHINE HOSE



TECHNICAL DATA


CONSTRUCTION: Stainless Steel Braid
-Nickel Plated Brass Nuts - Brass Barbs -
Rubber Washers - Stainless Steel Ferrules

FLOW RATE: 1500PSI Max. Burst Pressure,
15° to 158° Working Temp.

CODE APPROVALS: UPC Approval, CSA
Approval

PART#	DESCRIPTION
48372	6' Stainless Steel Braided • Pair ¾" FHT x ¾" FHT • 72"
48371	5' Stainless Steel Braided • Pair ¾" FHT x ¾" FHT • 60"
48370	4' Stainless Steel Braided • Pair ¾" FHT x ¾" FHT • 48"

ROUGH IN DRAWING

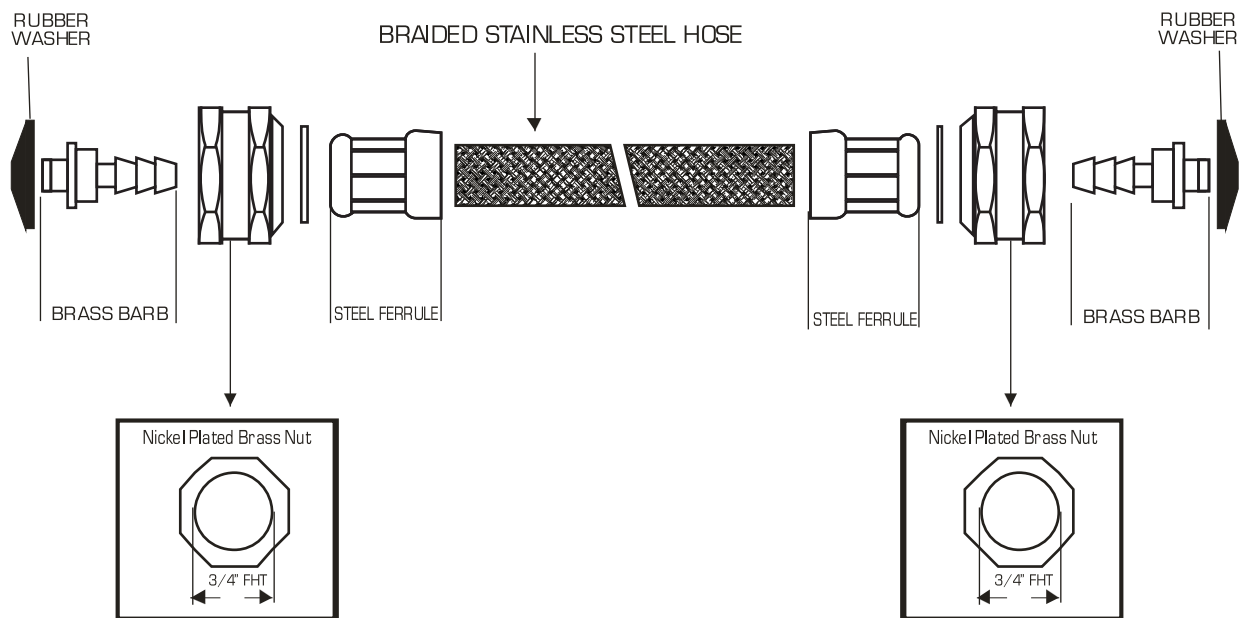

ALL DIMENSIONS SHOWN ARE NOMINAL