



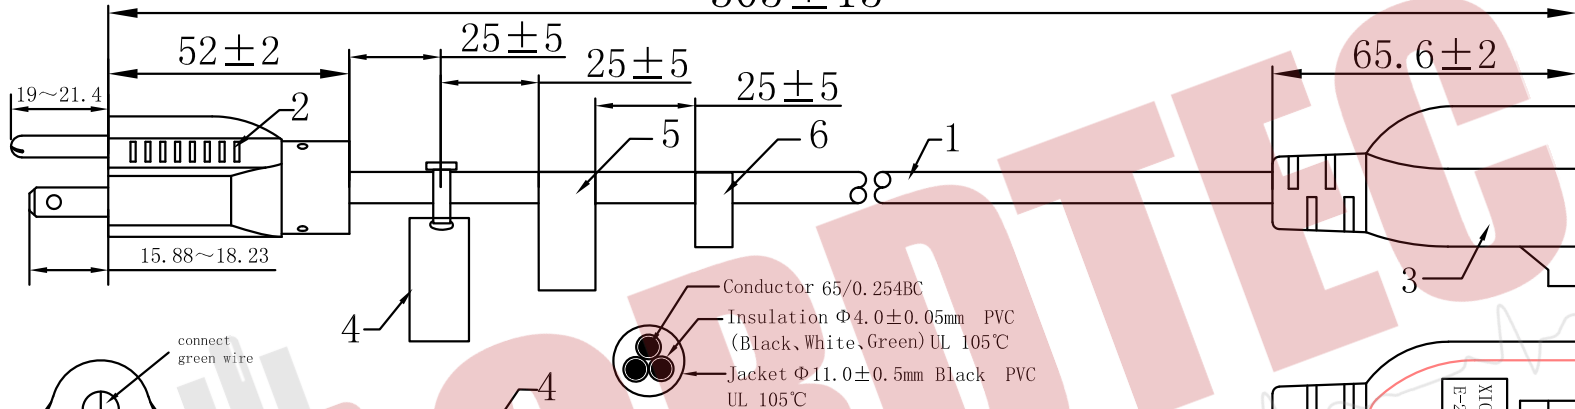


305 ± 15



CY80 wire marking:  
 (UL) E218701 SJTW 12AWGX3C 300V 105°C VW-1 GUANGDONG  
 XIONGRUN C(UL) TYPE SJTW 3X3.31mm<sup>2</sup> (12AWG) 300V 105°C  
 E218701 FT2 DRY 60°C WATER RESISTANT

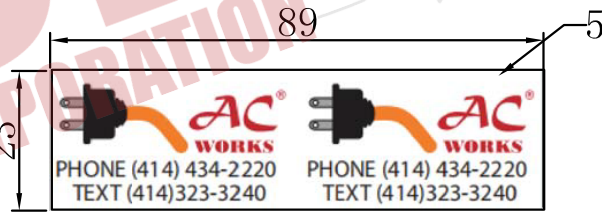

- requirement:
- 1: Dielectric voltage :between jacket and conductors 4200V/S  
between conductors 2500V/S
  - 2: Insulation resistance 100MΩ.
  - 3: Continuity of lead 100% OK.
  - 4: RoHS COMPLIANT.
  - 5: 5pcs/bundle

6	UL Label	1	EA
5	89X23mm AC works Label	1	EA
4	1875W 142.3X53.3mm Electrical Extension Cord Safety Label	1	EA
3	XR-502F (NEMA5-20R) , COLOR:black, PVC	1	EA
2	NEMA 5-15P (XR-301B) COLOR:black, PVC	1	EA
1	SJTW 12AWGX3C 105°C, COLOR:black, :L=285mm	1	EA
NO.	DESCRIPTION	QTY	unit



	<b>AC Connectors of Cordtec Power Corp</b> Main:1-414-434-2220 Fax:1-414-323-8386 Text:1-414-323-3240 Email: Info@CordtecPower.com Website: CordtecPower.com/ ACWORKS.com	TOLERANCE:				ITEM: S515520-012			
		DWG NO. :1 of 1				CUSTOMER:Cordtec Power			
		UNIT	DATE	SCALE	REV	DRAWN	CHECKED	APPROVED	
mm	2026.01.05		1.0						