

INSTALLATION INSTRUCTIONS

UNDERMOUNT STAINLESS STEEL SINKS

MODELS

S603-5-O
S901-O
S901-5-O
S902-O
S903-O
S904-O
S905-O
S904-5-O
S906-O
SW101
SW102
SW103



4

Installing the sink

Insert the screws (1) loosely in the holes that you drilled in the underside of the counter.


Ensure that you use the clips in the locations that have the narrowest clearance between the sink and counter.

Place a small bead of silicone sealant (not included) around the upper lip of the sink (A).

Carefully place the sink (A) into its location under the counter, with the lip of the sink being supported by the clips (AA).

Tighten the screws (1) evenly, ensuring the sink (A) remains in place.

Wipe away any excess silicone and, for best results, allow the bond to rest undisturbed for 8 hours or overnight.

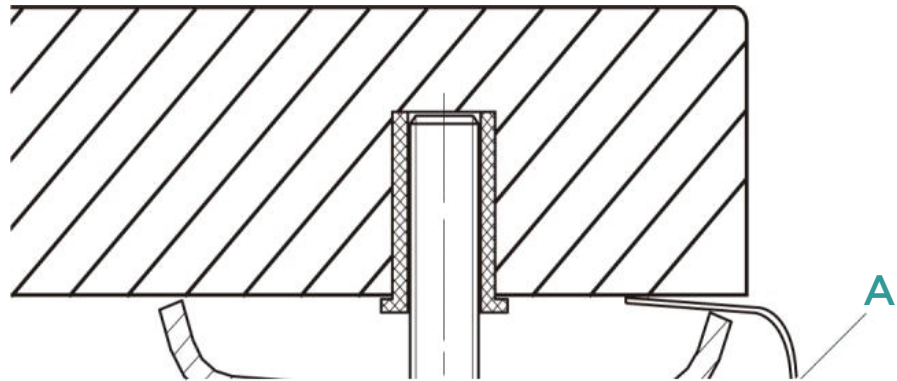

**AFTER
INSTALLATION**



**WAIT 8 HRS
BEFORE USE**

AA

1

A



CARE AND CLEANING GUIDELINES

Cleaning

- Daily, regular cleaning to remove dirt and prevent staining is recommended. Use liquid dish detergent, water and a soft household sponge.
- Mild, non-abrasive cleaners can be used with a nylon scrub pad. To ensure a uniform appearance in a stainless steel sink surface, rinse with water and wipe down the sink with a soft, dry cloth. Drying the sink will prevent water spots caused by time in the water.
- Remove stubborn stains from lime or calcium deposits by pouring a little warm vinegar or vinegar-based cleaner into the sink and allow it to sit for a few minutes. Rinse with clean water and dry.

Please note chlorides are found in most all soap, detergents, bleaches and cleansers. Chlorides can be harsh on stainless steel. Rinse your sink thoroughly after each use to remove any chloride residue.

Scratches

Scratches are inevitable during your usage over time. To treat, use a nylon pad with an iron free abrasive polishing compound. Follow the original polish lines to blend out the scratch in a small area. Be cautious not to overdo the process, as cleaning too aggressively could result in a bright spot.

Rust Spots

Stainless steel does not rust. Rust stains are the result of iron particles introduced by water, cookware, and steel wool pads that react with water to create rust. Metal cleaners will remove rust spots.

Food Stains

Depending on the severity of the stain, use a bleach and water solution or pour the bleach onto a cloth and cover the stain. Allow the bleach to sit for at least 1/2 hour and then clean with dish detergent and water.

Some Don'ts

- ✗ DO NOT use strong abrasive cleaners, metal scrub pads, or steel wool. These will scratch the surface.
- ✗ DO NOT leave rubber mats or sponges inside the sink. Water trapped below could lead to stains.
- ✗ DO NOT let food with a high salt content sit inside the sink for prolonged periods of time.
- ✗ DO NOT allow chlorine bleach to sit inside a stainless steel sink for more than 1 hour.
- ✗ DO NOT allow drain cleaners to come into contact with the sink surface.
- ✗ DO NOT pour paint in your sink. The chemicals in acrylic paint will react with sinks if allowed to sit over 24 hours and will produce permanent marks. For latex based paints, remove any residue immediately using a paint remover manufactured by the same brand. Consult the paint remover recommendations before using on the sink. For all sinks, we also recommend nail polish remover, rubbing alcohol or an acetone based paint remover to eliminate paint residue.



206 WEMBLY ROAD - NEW WINDSOR, NY 12553
P: 718.602.6060 F: 718.963.2082 - E: INFO@FINEFIXTURES.COM
TOLL FREE: 1.877.8FIXTURES
FINEFIXTURES.COM

