



WoodStart® Starter Shingle

FEATURES & BENEFITS

Owens Corning WoodStart® Starter Shingle features a unique design, that allows for fast, easy installation. It's a component of the Owens Corning™ Total Protection Roofing System™ ^.

For use under Woodcrest® shingles, only.

Wide Nailing Area

- Nailing area is about 1.5 inches wide, complimenting the wide nailing area on Woodcrest® Shingles

Sealant Strip

- WoodStart® Starter Shingle seals at the eave, which adds protection from wind uplift
- Continuous sealant ensures an effective seal between the starter and the first course

Laminated Two-Ply Starter Strip

- Allows installer to lay just ONE piece of WoodStart® Starter Shingle under the shingles and meet ply requirement versus TWO pieces as required by other manufacturers
- Speeds up installation because the product is pre-laminated at the plant

Flat vs. Buckled Look

- WoodStart® Starter Shingle course is more user-friendly than other manufacturers, which require a second starter course
- The flat design complements the overall look of the roof

Valuable in Valleys



- Use WoodStart® Starter Shingle as a "bleeder strip" or vertical course running up the valleys because it matches Woodcrest® Shingles
- The continuous bead of sealant helps bond the shingle to the valley liner

Color Convenience

- WoodStart® Starter Shingle is available in all Woodcrest® Shingle colors

WoodStart® Starter Shingle Product Specifications

Nominal Size	40" x 13 ³ / ₈ "
Pieces per Bundle	16
Lineal Feet per Bundle	53.33

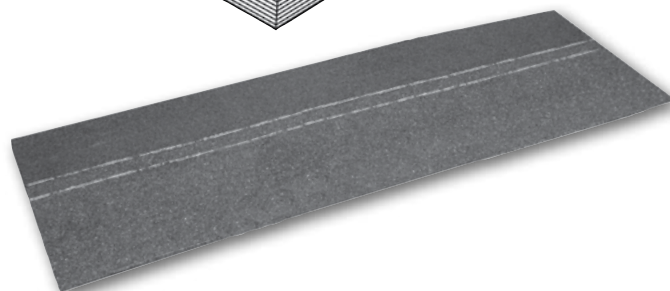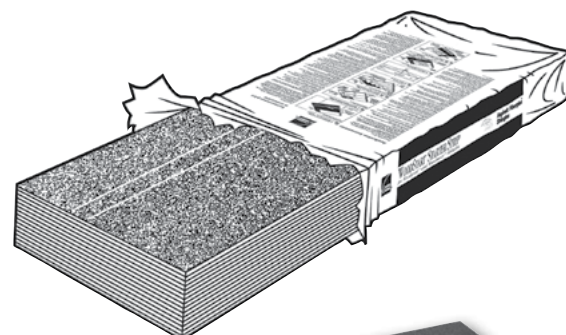

Pub. No. 10013637-A. Printed in the U.S.A. July 2014. THE PINK PANTHER™ & © 1964 - 2014 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. © 2014 Owens Corning. All Rights Reserved.

WoodStart® Starter Shingles are a component of the Owens Corning™ Total Protection Roofing System™ ^