
Assembly Instructions

Caution: You must read this before you proceed

Care & Maintenance







• Furniture may scratch floors. We recommend using furniture pads to protect your floors.



Do not put hot items directly on furniture surface.



• Do not clean furniture with harsh cleansers or polish.



• Do not place furniture under direct sunlight.



Do not place furniture near heating or cooling vents.



 Do not write on furniture without a padded barrier to protect the surface.



Do not place furniture outside . For indoor use only.



 Stains may be removed with mild soap solution and damp cloth.



• Children should not climb or jump on the furniture.




 Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in carton for hardware packs and legs. Sets often ship in multiple boxes and may arrive a day or two apart.

Chair Part List Label Picture Description QTY 1 Α **Backrest** В Left armrest 1 С Right armrest 1 D Seat 1 Ε 1 Seat Cushion <u>Hardware</u> Label Picture Description QTY Bolt 5 1 (M6X10mm) Bolt 7 2 (M6X35mm) 3 Washer 11 Allen Wrench 1 4

Assembly Preparation

Before Beginning Assembly:

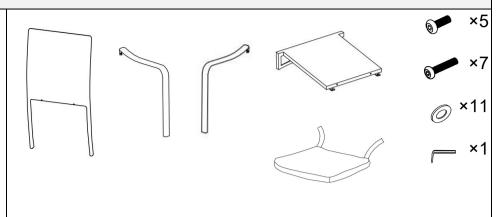



Read instructions, cover to cover-



Have 2 adults on hand for assembly-



Do not assemble on flooring or carpet-




Assemble on a clean non-marring surface (packing foam)-



Save all packaging until finished-

Assembly Steps

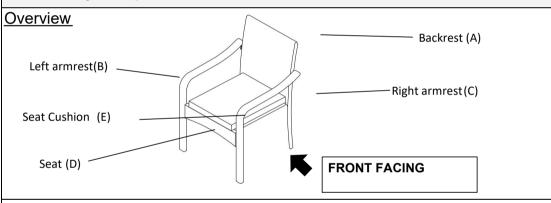

This Chair has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the Chair parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.













Unpack and place all parts on a clean, non-marring surface.

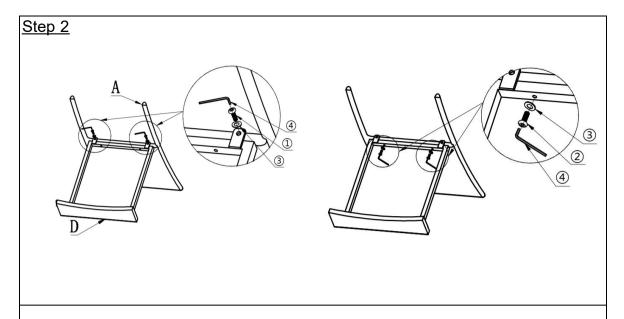

Place the Seat(D) face up onto a clean, non-marring surface.
Align the Seat(D) to the Backrest(A) as shown above.
Attach the Seat(D) to the Backrest(A) using Bolts(①②), Washers(③)with an Allen Wrench(④).

Do not fully tighten the Bolts.

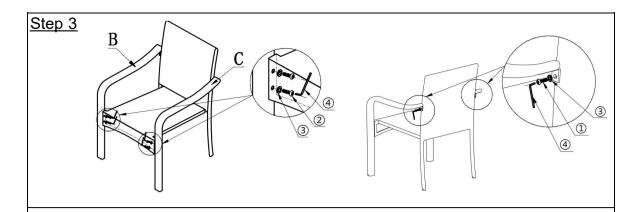

Stand the Chair up.

Align the Seat(A $\dot{\ }$ D) to the Chair armrest(B $_{\times}$ C) as shown above.

Attach the Seat(A $\stackrel{\frown}{N}$) to the Chair armrest(B $\stackrel{\frown}{N}$) using Bolts($\stackrel{\frown}{U}$ $\stackrel{\frown}{N}$), Washers($\stackrel{\frown}{S}$) with an Allen Wrench($\stackrel{\frown}{4}$). **Do not fully tighten the Bolts.**

Step 4



Exert pressure floorwards, onto the Chair with both your hands.

This pressure will help the Legs and Seat reach full alignment status.

Check for wobbles on a LEVEL surface.


If no wobbles are found proceed to tighten the Bolts in a sequential manner, until evenly secured.

When tightening the Bolts tighten sequentially.

Do not tighten any Bolt fully and then move on towards the next one.

If there are still wobbles after tightening, loosen the Bolts and execute the same above process.

Step 5



Stand the Chair up.

Put the Seat Cushion(E) onto the Chair.

Secure the Seat Cushion using the Velco straps as pictured.

Step 7



Your Chair is ready for use.

This Chair can only be used on a flat and level surface.