



# Highline®


Tall two-piece round-front toilet, 1.6 gpf  
**K-35717**

## Features

- Two-piece design
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms
- Tall height offers seating 2-1/2" (63.5 mm) higher than Comfort Height® for enhanced comfort, ease of sitting and standing, and gracious accessibility
- 1.6 gpf (6.0 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) fully glazed trapway
- Precision-engineered tank, bowl, and trapway create strong siphon during flushing
- Class Five® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Combination consists of 35643 bowl and 4468 tank

## Installation

- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

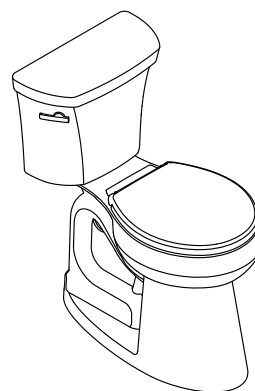

## Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992

## KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.


## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description  |
|-------------------------------------------------------------------------------------|------|--------------|
|  | 0    | White        |
|  | 96   | Biscuit      |
|  | 7    | Black Black™ |

# KOHLER®

**Highline®**  
Tall two-piece round-front toilet, 1.6 gpf  
**K-35717**

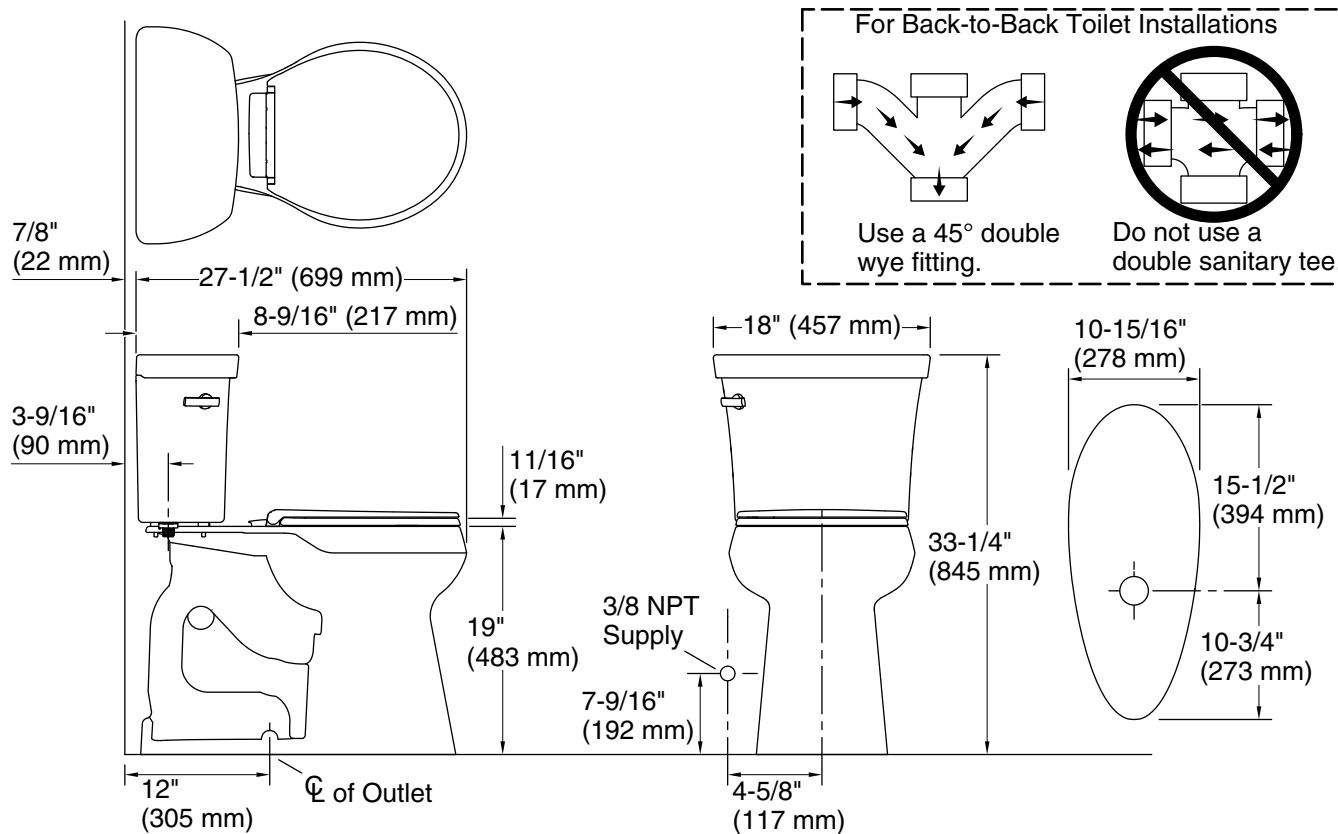

## Technical Information

All product dimensions are nominal.

|                       |                 |
|-----------------------|-----------------|
| Toilet type:          | Floor-mount     |
| Waste Outlet:         | Floor           |
| Flush type:           | Class Five      |
| Trap passageway:      | 2-1/8" (54 mm)  |
| Rim to water surface: | 6-3/8" (162 mm) |
| Rough-in:             | 12" (305 mm)    |

## Fixture Supply Requirements

|                      |                    |
|----------------------|--------------------|
| Min static pressure: | 20 psi (137.9 kPa) |
| Max static pressure: | 80 psi (551.6 kPa) |

## Notes

Install this product according to the installation instructions.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

8-23-2025 04:39 - US/CA

THE BOLD LOOK  
OF **KOHLER®**