


delta_▲

Adjustable Spring Floor Stand

Assembly instructions RS8700

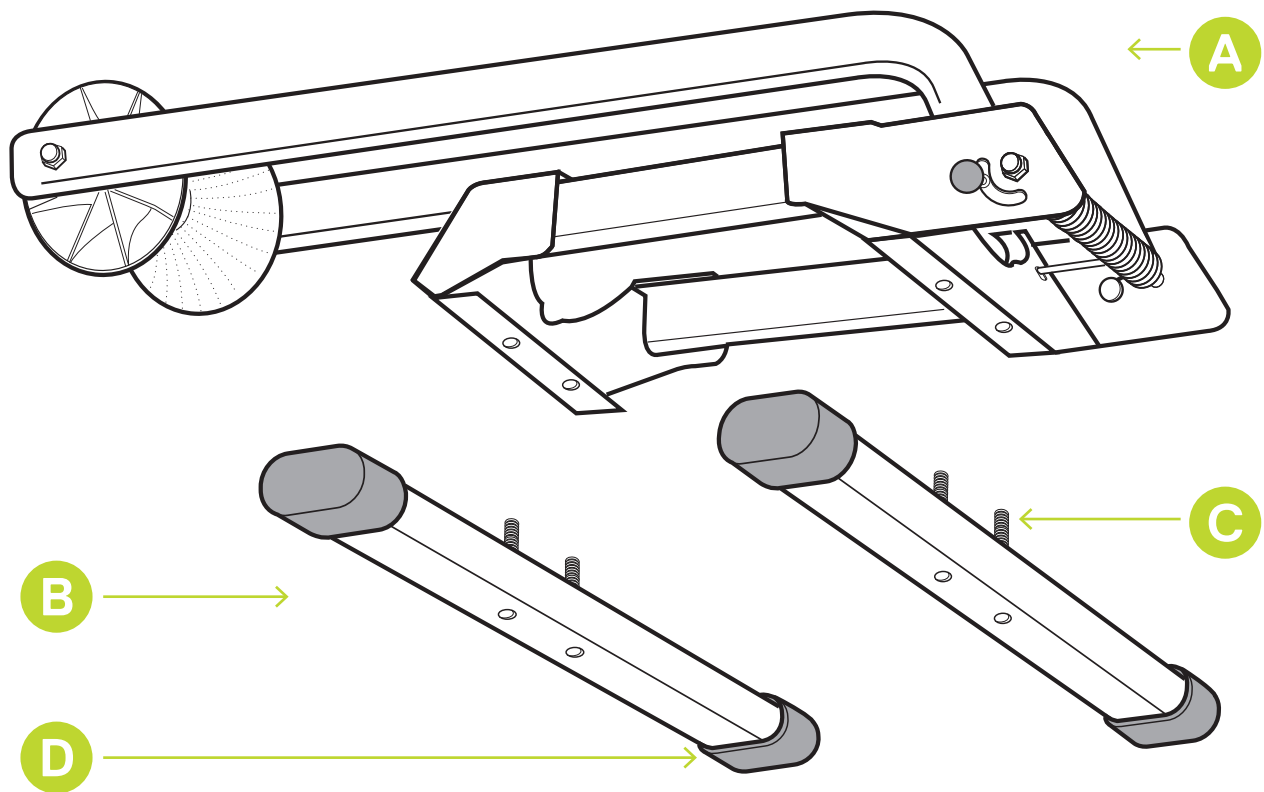


Parts

- A** x1 — Wheel Holder Assembly
- B** x2 — Base Legs
- C** x4 — Bolts M5 (pre installed)
- D** x4 — Rubber Feet (pre installed)


Tool Required

Phillips Head
Screwdriver

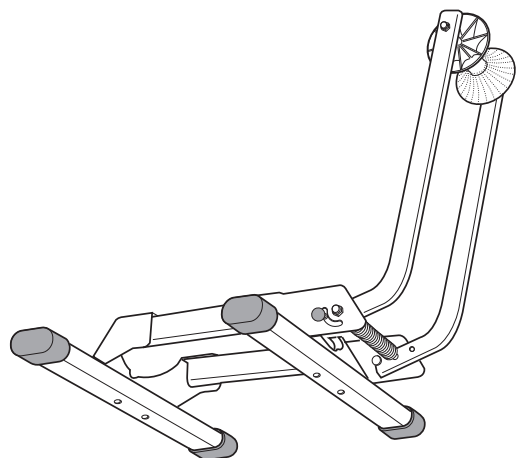

1


Mount legs to the wheel holder assembly.
Tighten bolts with screwdriver.

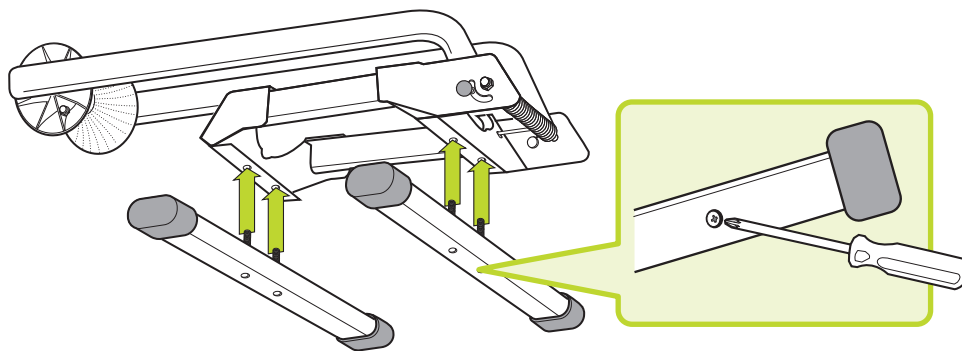

2

Unfold rack by raising wheel holder arms.
It will click into position when ready to hold front or rear wheel.


To close: Push release button to gently lower the wheel holder – careful of fingers!

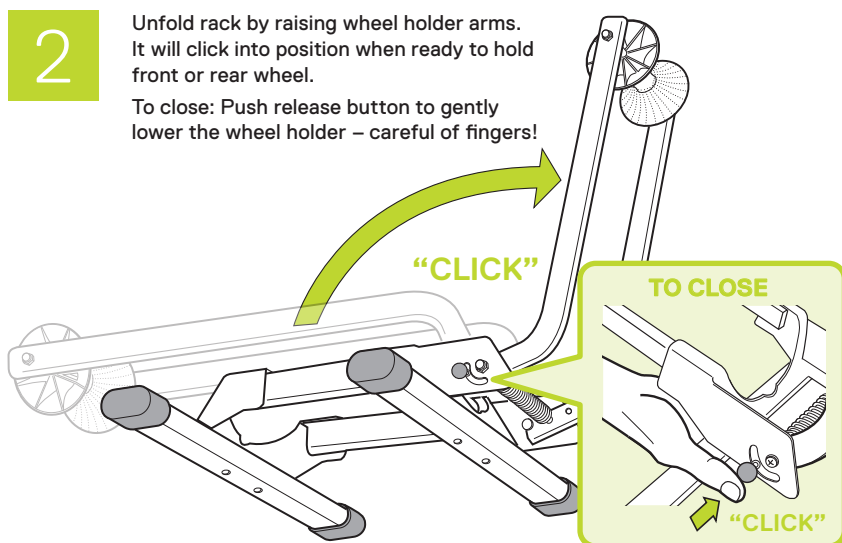

IMPORTANT SAFETY NOTE


Be careful of fingers when releasing wheel holder spring.

CAUTION

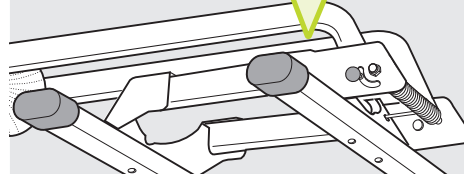


3


To adjust for widest tires:
Disassemble rotating wheel guide & reposition ridged spacers as shown.
Take care to replace all washers in correct position.
Do not over tighten bolts; allow wheel guides to rotate in place.

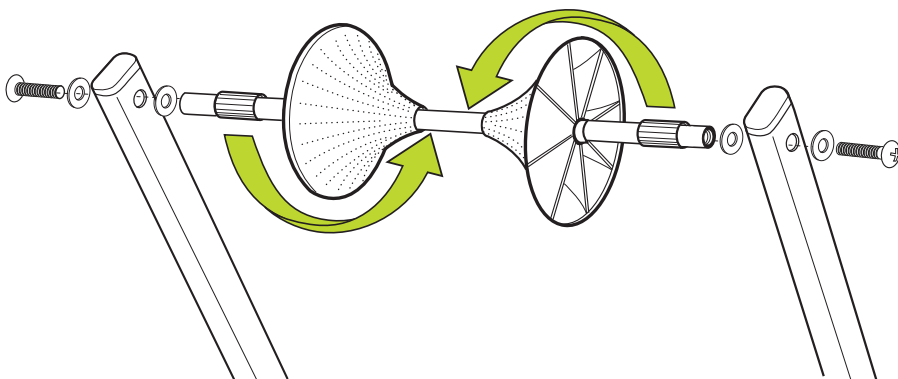

Works with most tire widths



For tires wider than 4 inches



Need help? Please do not return to store.
For immediate response email service@designbydelta.com



Delta Cycle Corporation
36 York Avenue, Randolph, MA 02368 USA
800-474-6615 / www.designbydelta.com
© Copyright 2020