



	KNOCKOUTS		
	SYMBOL	CONDUIT SIZE	
		IN	MM
A	.50	13	
B	.75	19	
C	1.00	25	
D	1.25	32	
E	1.50	38	
F	2.00	51	
G	2.50	64	
H	3.00	76	

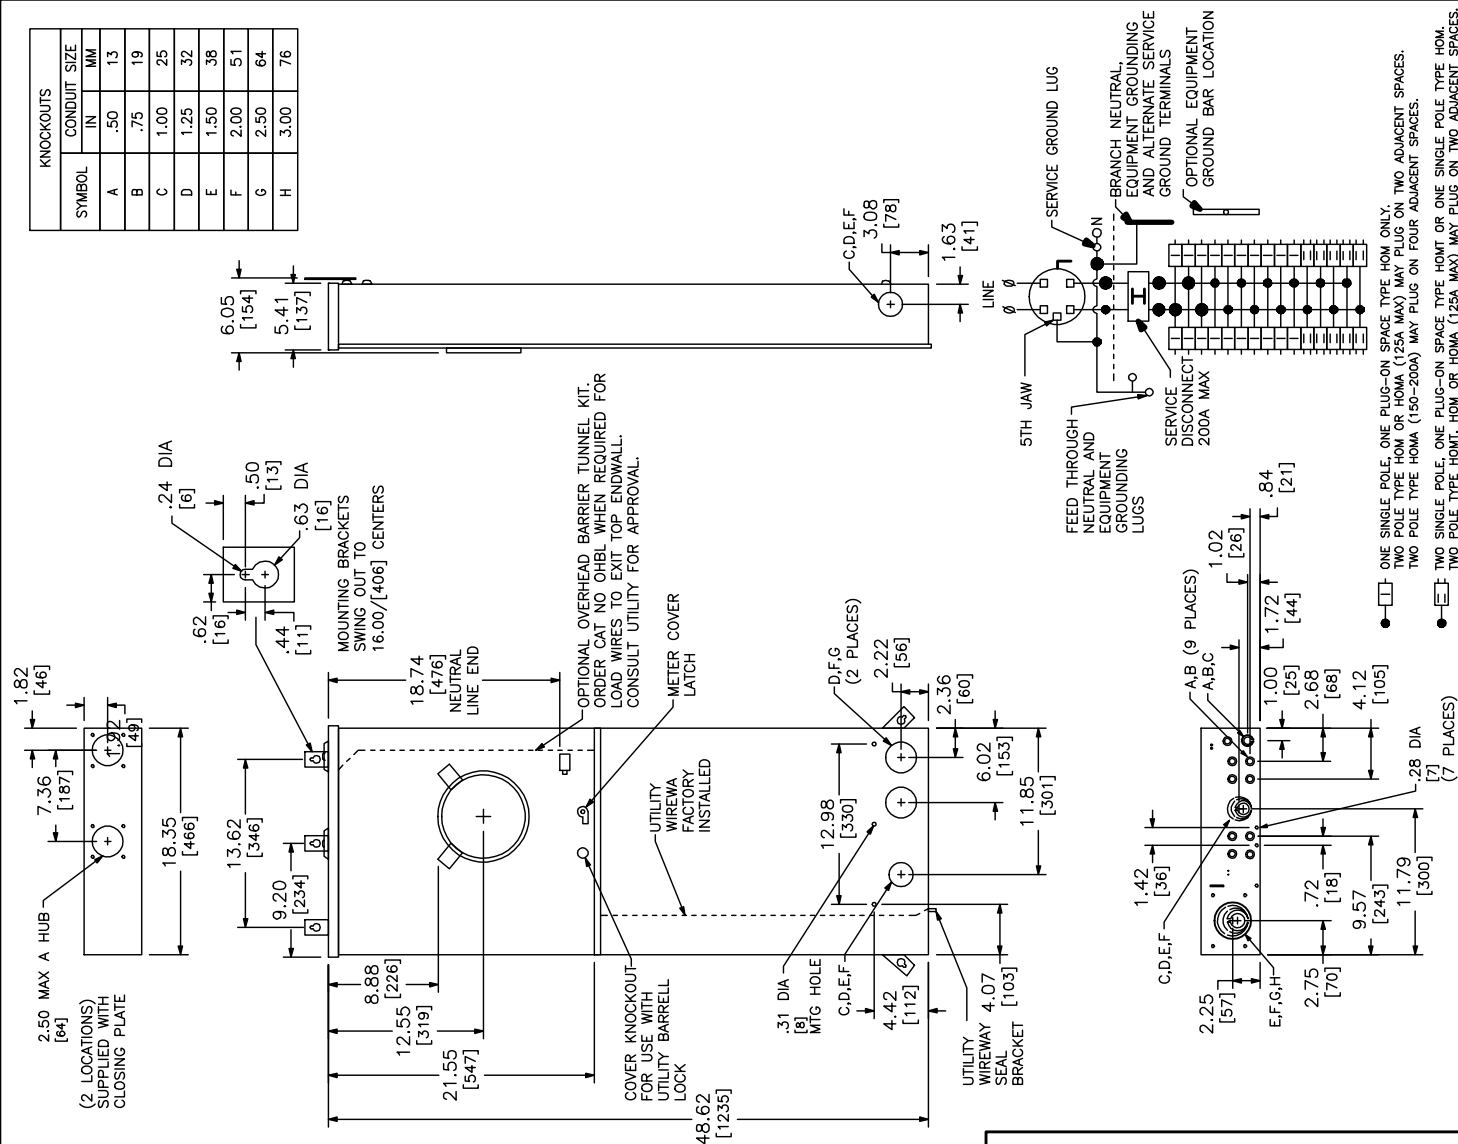

NOTES:
FINISH — GRAY BAKED ENAMEL POWDER
COAT PAINT OVER CLEANED GALVANNEELED STEEL.
MAXIMUM SYSTEM VOLTAGE:
120/240VAC, 103W, 50-50 HZ
208Y/120VAC, 193W, 50-60HZ
(FROM A 304W SYSTEM)
UL LISTED — FILE E-6294 VOL M
SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT.
SUITABLE FOR UNDERGROUND/OVERHEAD SERVICE.

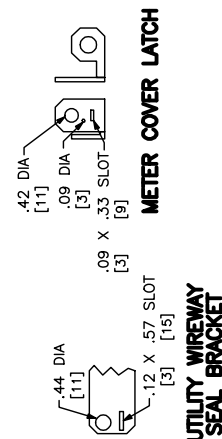

DUAL DIMENSIONS:

AMPERE RATING	FACTORY INSTALLED BYPASS TYPE	SHORT CIRCUIT CURRENT RATING	CATALOG NUMBER	SERIES	SPACES	MAXIMUM NUMBER OF SINGLE POLE HOM CIRCUITS	LINE SIDE PHASE & NEUTRAL LUGS AWG/KCMIL	SERVICE GROUND LUG AWG
150	LEVER	22K	RC3040M150SL RC3040M150LSL	M01	30	40	#6-350 CU/AL	#14-2/0 CU #12/2/0 AL
200	LEVER		RC3040M200SL RC3040M200LSL					

COMBINATION SERVICE ENTRANCE DEVICES
RINGLESS TYPE METER MAIN
HOMELINE 30-40 CIRCUIT
RAINPROOF NEMA TYPE 3R ENCLOSURE
SURFACE MOUNT LEVER BYPASS

DWG# PWFDS-SYRS-0001
NO.