Installation Guide

Tools you will need
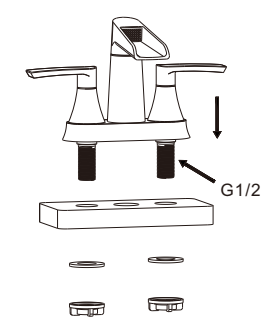
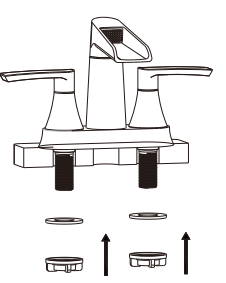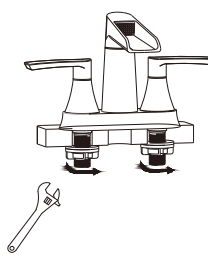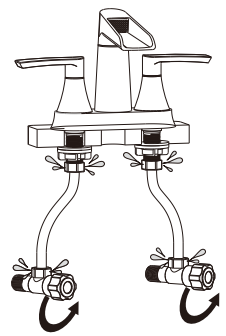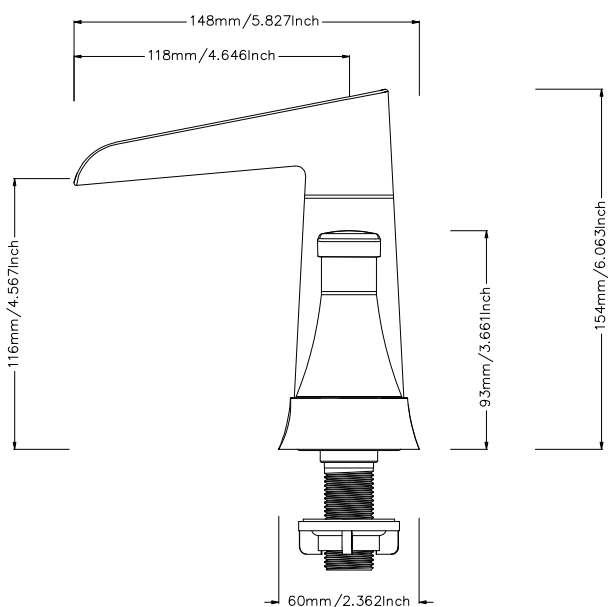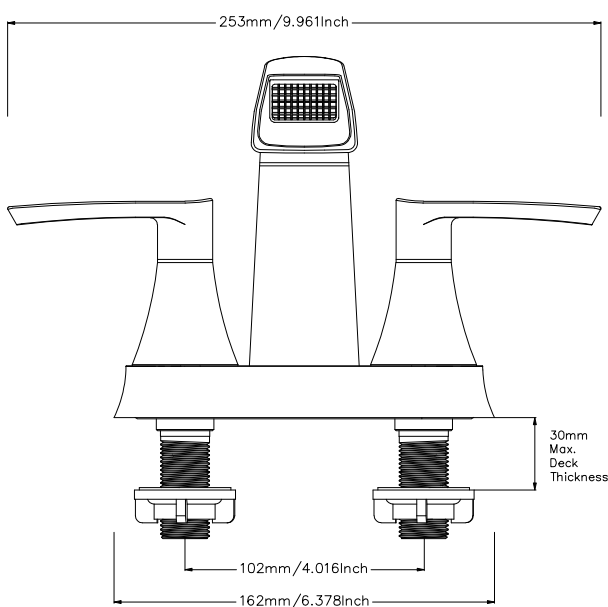| 1	2	3
Red ← → Blue	G1/2	
Face the logo to the front	Insert the faucet through sink	Screw the nut onto the connecting pipe body
4	5	6
Tighten fiting nuts with adjustable wrench	Connect and tighten the supply hoses	Turn on the water supplies. Check all connections for leaks
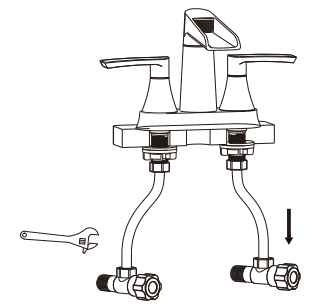
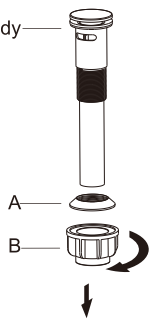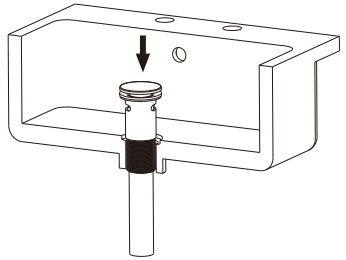## Pop-up Drain with Overflow Installation Guide

NOTES:
- Fits for sink WITH overflow hole.
- Clean the sink hole, make sure to remove debris.
- Please avoid using plumber's putty. The seal on top is leak-free. Plumber's putty might cause damage.
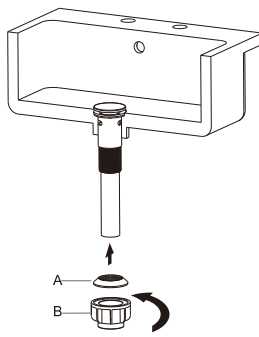- Silicone and plumbing tape can be use for sealing requirement.

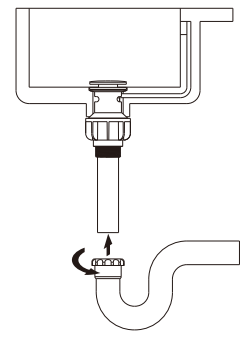**1** Unscrew components A & B to the seal.

C:the drain body

A

B

2 Slide the drain body C through the hole in the sink.

3 Screw components A & B back on as shown.

A

B

4 Connect the rear end of the drain to the Drain Pipe.

5 Push to activate.

253mm/9.961Inch

30mm Max. Deck Thickness

102mm/4.016Inch

162mm/6.378Inch

148mm/5.827Inch

118mm/4.646Inch

116mm/4.567Inch

93mm/3.661Inch

154mm/6.063Inch

60mm/2.362Inch

56mm 2.204 Inch

55mm 2.165 Inch

41mm 1.614 Inch

23~45mm 0.905~1.771 Inch

43mm 1.693 Inch

221mm 8.700 Inch

68mm 2.677 Inch

32mm 1.259 Inch

13mm/0.512Inch

5.8±0.5mm/0.228Inch

1/2-14NPSM

HEX23±0.3

600mm±1.0mm/23.622Inch

6.8±0.5mm/0.268Inch

11.3mm/0.445Inch

HEX16±0.3

9/16-24UNEF

13mm/0.512Inch

5.8±0.5mm/0.228Inch

1/2-14NPSM

HEX23±0.3

600mm±1.0mm/23.622Inch

6.8±0.5mm/0.268Inch

11.3mm/0.445Inch

HEX16±0.3

9/16-24UNEF