

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers



Wire strippers


HARDWARE INCLUDED




Canopy




Stem A




Fixture



Iron Ring



Bracket



Decorative Screws (long)



Decorative Screws (short)




Stem B



Rubber Ring



Washer



Glass Shade




Hex Nut



Cover



Ball Nuts



Mounting Unit




Mounting Screws



Wire Nuts

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS

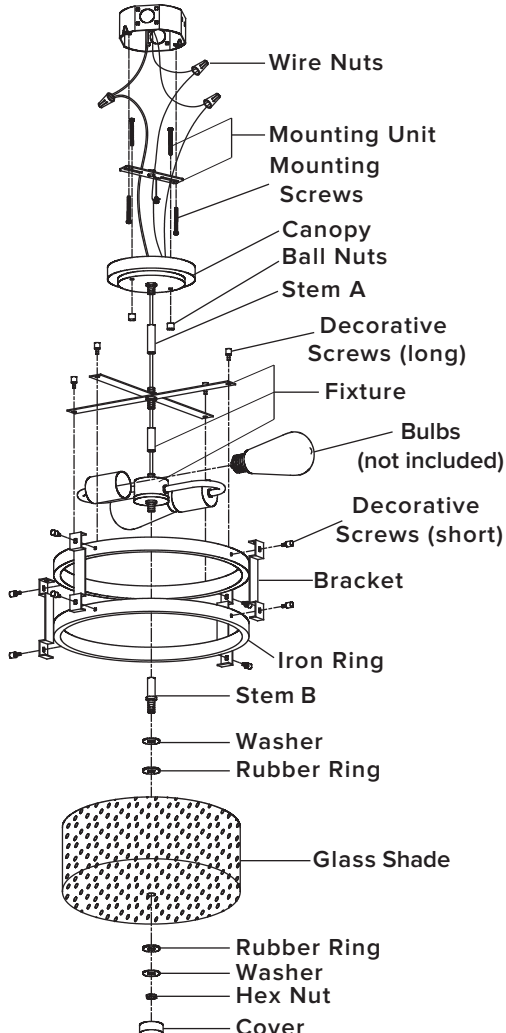

INSTALLATION


STEP 1

Attach the **bracket** to the **iron ring** through screw holes as shown, and secure it with **decorative screws (short)**.

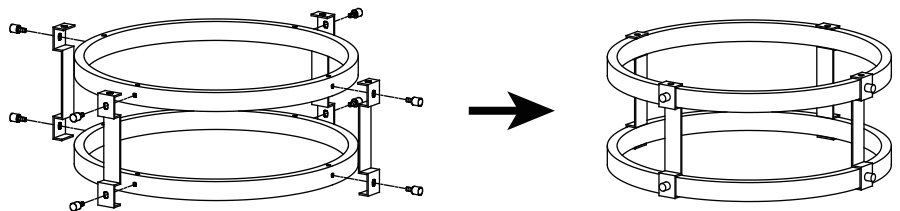

STEP 2

1. Installation **fixture**.
2. Attach the **fixture** to the **iron ring** through screw holes as shown, and secure it with **decorative screws (long)**.

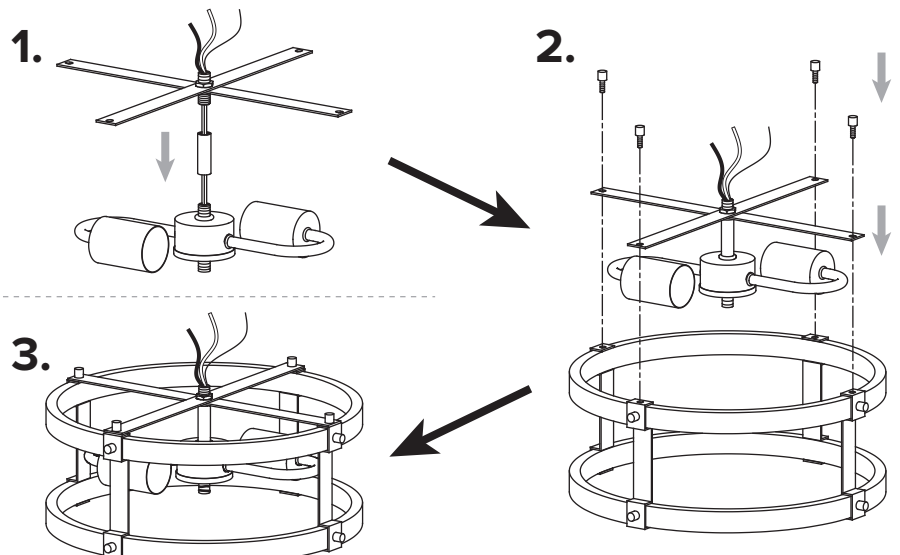


ASSEMBLY INSTRUCTIONS (INSTALLATION)

STEP 3

Weave the fixture wire and fixture ground wire through the **stem A** and **canopy**.


Screw the **canopy** and **stem A** onto the **bracket**.

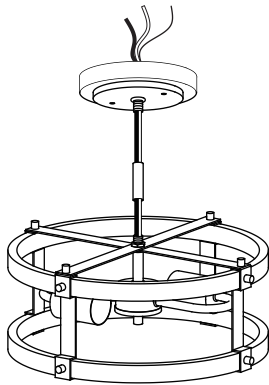

STEP 4


Unscrew the **ball nuts** from the **mounting unit**.

Use the **mounting screws** to attach the **mounting unit** to the junction box.

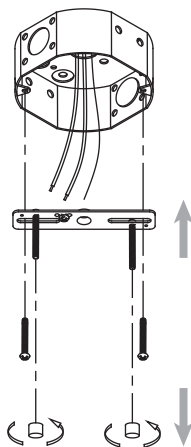


STEP 6

Attach the **fixture** to the **mounting unit** through screw holes as shown, and secure it with **ball nuts**.

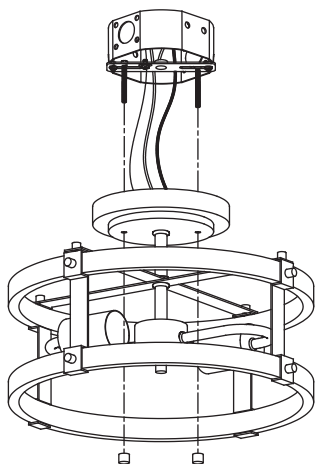

STEP 7

Install bulb (not included)

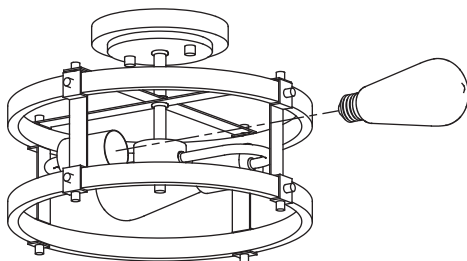

STEP 5



Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

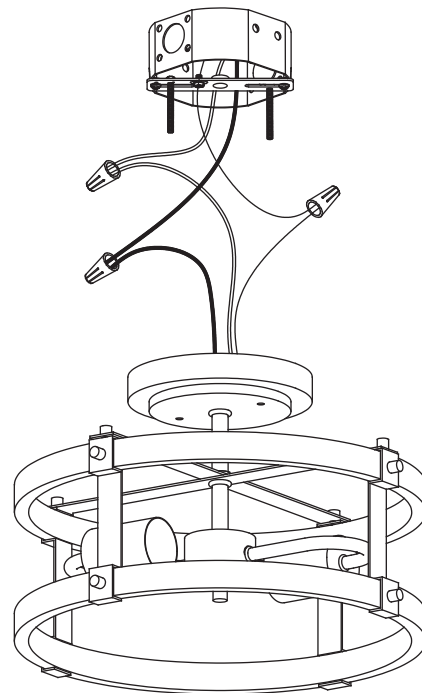

STEP 8

Tighten the **stem B** into the **fixture**, place the **washer**, **rubber ring** and **glass shade** onto the **stem B**, then secure with **hex nut** and **cover**.

