

Ceiling Fan With Light User Manual

NO.5001



Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.

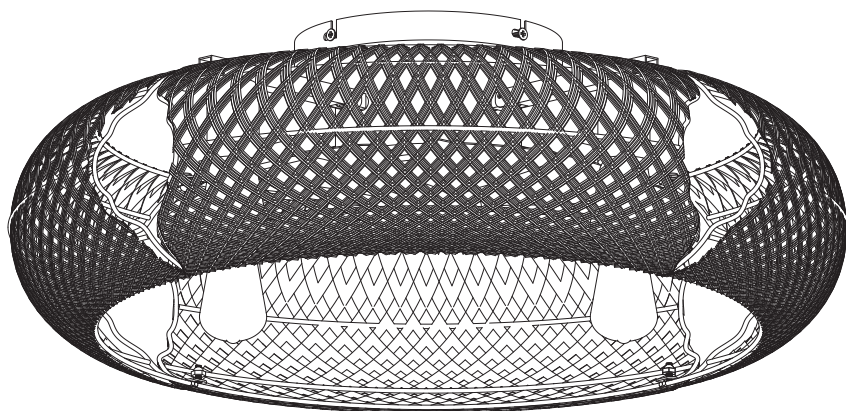

Notice Before Installation

1. Not compatible with a dimmer switch. Please use a regular ON/OFF wall button switch or the included remote.

2. While the installation process is straightforward, it is recommended that two individuals collaborate. This ensures efficient assembly of components and optimal safety when mounting to the ceiling.



Please Scan the QR code to watch the installation video.


If you have any questions, please feel free to contact us through the order page.

Warning!

1. Installation should be performed by a professional.
2. This light fixture operates within a 110V to 265V range only.
3. Do not install the light fixture in damp conditions.
4. To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
5. Keep the light fixture away from acidic and corrosive materials.

Package includes

Check to see that you have received the following parts:



Hang bracket



screw driver



M4*38 screw



M10 wrench



M3/M4 wrench



M3/M4 screw nut cap



Paper tube



Plastic expansion anchor



M5*30 Self-tapping screw



M3*18 screw




M3*L6 screw



M4*L12 screw



M4*L8 screw




Canopy




hook



Remote control

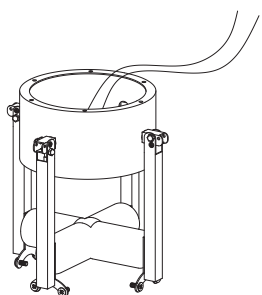


Motor housing
Square tube bracket
Controller

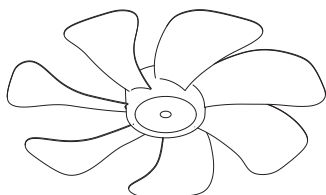

Blades




Blades

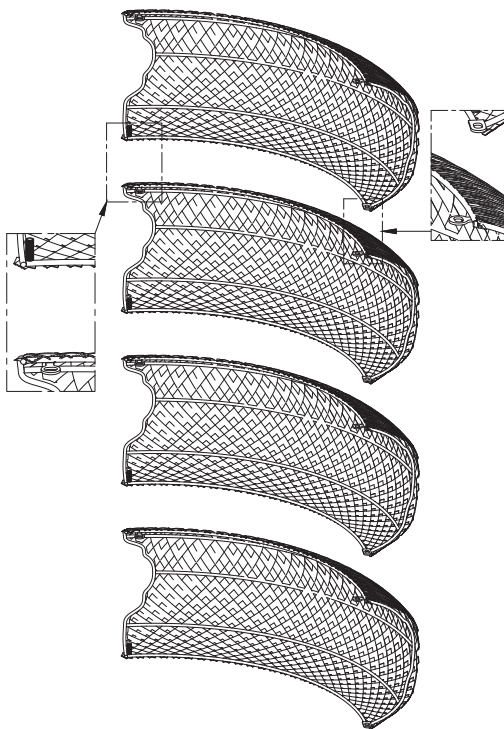


Rattan housing
module


How to assemble ?

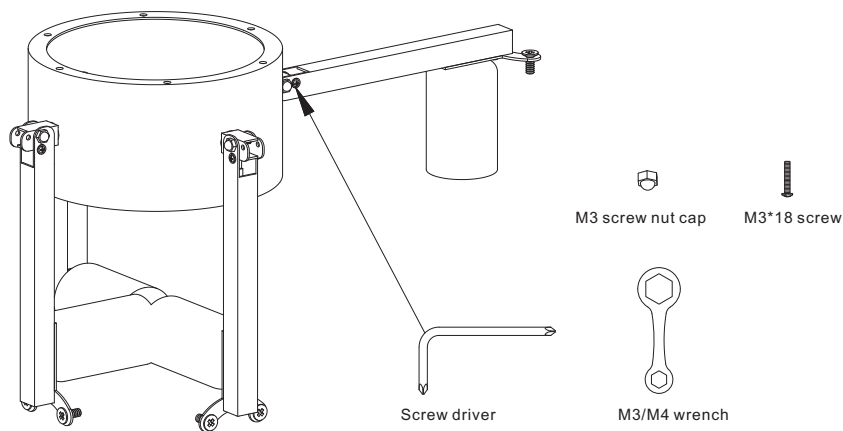


Step 1: Unfold the square tube brackets and align them in a straight line. Secure them using M3×18mm screws with an M3 wrench and screwdriver. Verify that all four square tube brackets are parallel and firmly fastened.

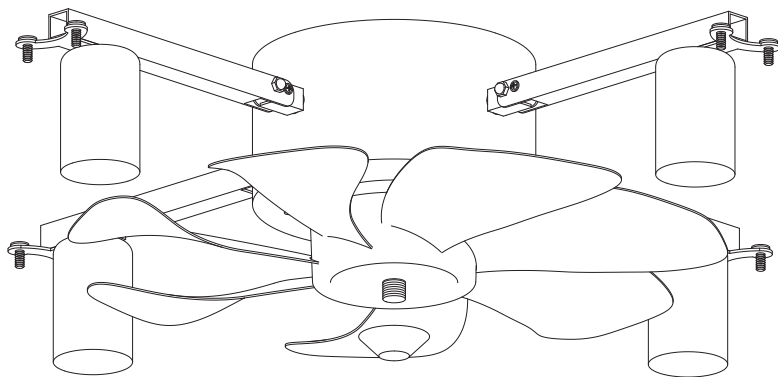


Step 2: Install the blades and rotate the blade cap counterclockwise to secure them.

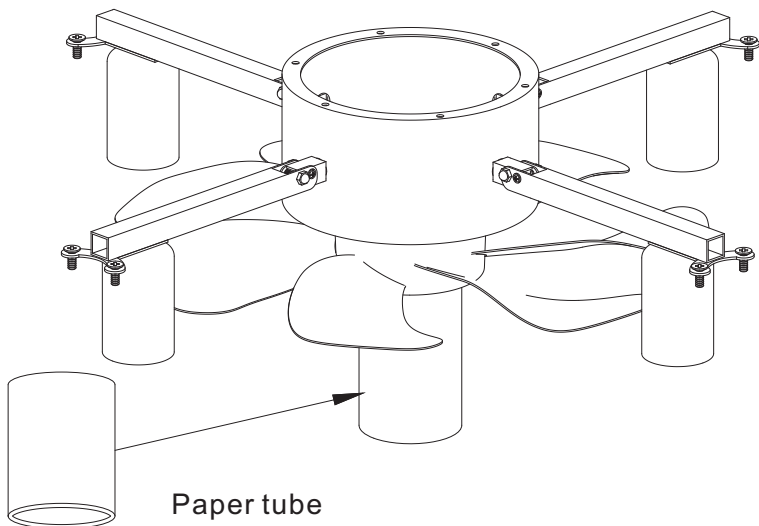


Step 3: Place the paper tube under the blades to facilitate subsequent installation and improve stability.

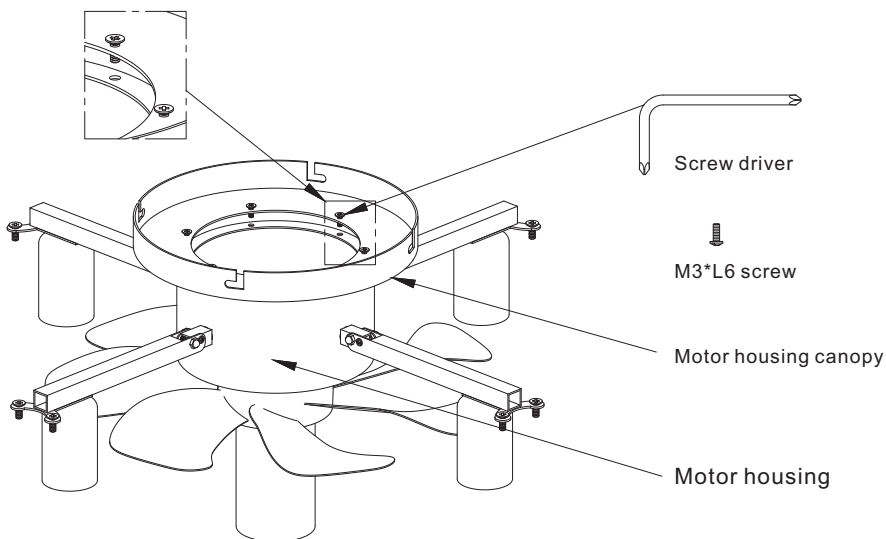


Step4: Secure the canopy onto the motor housing with M3×L6 screws.

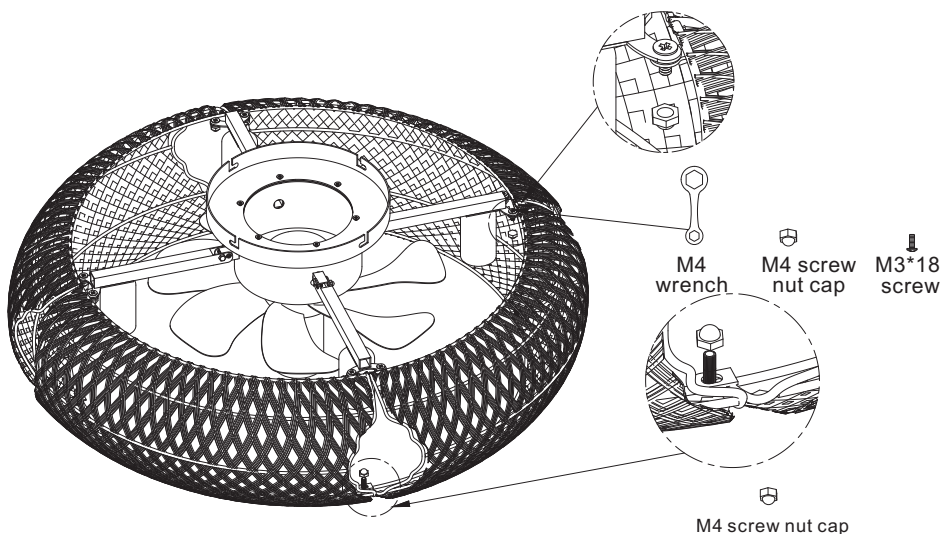

Step 5: Attach the rattan housing modules to the square tubes. Tighten the outer rattan housing modules with M4 screw nut caps and ensure they are leveled properly.

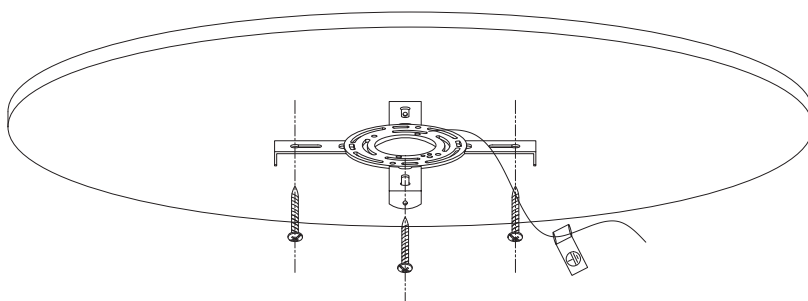


Step 6: Mount the hanging bracket onto the ceiling.

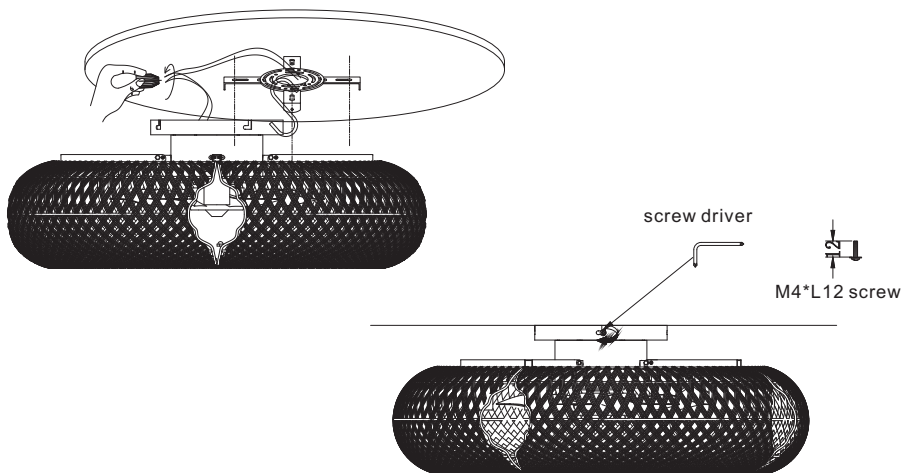

Step7: Hook the lamp body, ensure the power is off, then connect the L (Live) and N (Neutral) wires of the controller to the corresponding wires of the power line. Securely fix the lamp body to the ceiling. The installation is complete.

How to Install to the ceiling ?

1. Thread the power cable through the hole in the hanging bracket.
2. Secure the hanging bracket to the ceiling using wood screws or expansion screws.
3. Connect the live wire and the neutral wire of the lamp body to the power cable separately.
4. Attach the canopy to the bracket by fastening the screws on the sides.

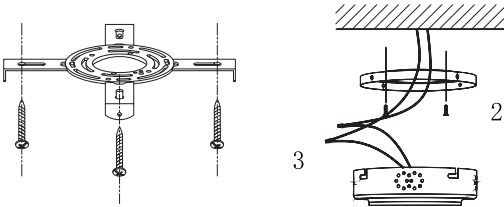

Connect the black wire to the live wire (L).
Connect the white wire to the neutral wire (N).

Remote Control Manual



Pairing Code: Press and hold the [Ⓢ] Stop button within 5 seconds after powering on. The light will flash to indicate successful pairing.

Clear Code: Press and hold the [Fan Speed 4 + Ⓢ] button within 5 seconds after powering on. The light will flash to indicate successful clearing of the code.