



**vivante™**  
SHOWER DRAIN

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

## VIVANTE™ SQUARE SHOWER DRAINS TECHNICAL SPECIFICATION

### DESCRIPTION

Oatey Vivante™ centerpoint drains shall be used for tiled showers in residential and commercial applications when connecting to a DWV system. The drain body is constructed of durable and corrosion resistant 304-grade stainless steel with sloped drain body to ensure proper water evacuation. Drain height can be adjusted without rotation to meet the finished floor height precisely. The 2 in. PVC threaded outlet adapter threads into a compatible clamping collar drain base for use with shower pan liner or hot mop waterproofing applications. The decorative cover shall meet all necessary load and flow requirements for installations in shower areas. Drain kit includes a stainless steel debris basket and lifting key.

### FEATURES AND MATERIALS

- 304-grade stainless steel designer grate, drain body & debris basket
- Flow Rate: 10 GPM
- 2 in. PVC threaded outlet adapter
- Lifting key for removal of drain grate
- 304-grade stainless steel debris basket

### REQUIRED PARTS (NOT INCLUDED)

- 3-Piece clamping collar shower pan drain (Oatey 130 Series equivalent in PVC, ABS or cast iron for hot mop)
- Oatey PVC or CPE shower pan liner
- Oatey X-15 Bonding Adhesive for use with PVC shower pan liner or OateyWeld for use with CPE shower pan liner



### 130 SERIES SHOWER PAN DRAIN (SOLD SEPARATELY)

#### ABS or PVC Drain Base with Clamping Collar

Designed for use with tile or marble showers where a shower pan liner is used. The countersunk holes are used to secure the flange base to the subfloor with an approved fastener. The shower pan drain shall have a solvent weld connection over 2 in. Sch. 40 DWV hub connection or inside 3 in. Sch. 40 which conforms to ASTM D2665 (PVC) or D2661 (ABS). Base accepts 130 series 1/4 Turn Test Plug, which holds 40 ft of head pressure. Clamp collar ring fastens by use of hex bolts that thread into brass inserts and can be inverted to achieve an additional 1 in. in finished height. Drain base accepts 2 in. threaded outlet adapter which connects to Designline stainless steel drain body.

### APPROVALS AND LISTINGS

- Uniform Plumbing Code
- International Plumbing Code
- National Plumbing Code of Canada
- ASME A112.18.2 / CSAB125.2

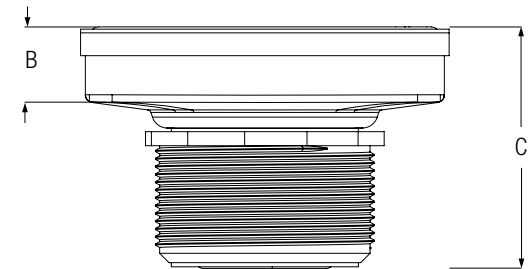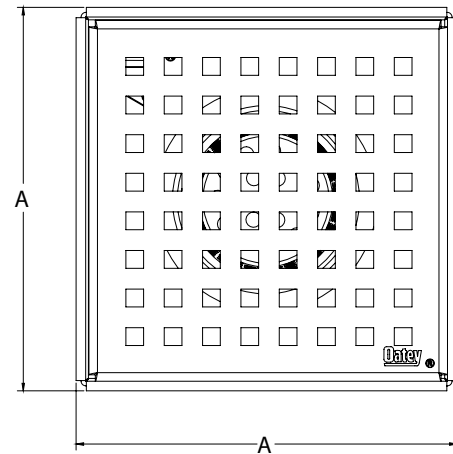

### DIMENSIONS

[A]:	VT32040	4X4 IN.
	VT2040	
	VT1040	
	VT32040BG	
	VT32040GB	
	VT32040GM	
	VT32060GB	6X6 IN.
	VT2060	
	VT32060	
	VT1060	
VT32060BG		
VT32060GM		
[B]:	0.78 IN. (3/4 IN.)	
[C]:	2.85 IN. (2-7/8 IN.)	

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)



**VIVANTE™ LINEAR SHOWER DRAINS**  
**TECHNICAL SPECIFICATION**

**PRODUCT SELECTOR**

✓	PRODUCT NUMBER	PRODUCT DESCRIPTION	TYPE	SIZE (IN)	GRATE DESIGN	FINISH
	VT32040	4 X 4 IN SQUARE DRAIN SQUARE GRATE MATTE BLACK	POINT	4X4 IN.	SQUARE	MATTE BLACK
	VT2040	4 X 4 IN SQUARE DRAIN SQUARE GRATE RETAIL			TILE-IN	STAINLESS STEEL
	VT1040	4 X 4 IN SQUARE DRAIN TILE-IN GRATE RETAIL				
	VT32040BG	4 X 4 IN SQUARE DRAIN SQUARE GRATE BRUSHED GOLD			SQUARE	BRUSHED GOLD
	VT32040GM	4 X 4 IN SQUARE DRAIN SQUARE GRATE GUNMETAL GRAY				GUNMETAL GRAY
	VT32040GB	4 X 4 SQUARE DRAIN SQUARE GRATE GOLD & BLACK				MATTE BLACK WITH GOLD TRIM
	VT32060GB	6 X 6 SQUARE DRAIN SQUARE GRATE GOLD & BLACK		6X6 IN.	SQUARE	STAINLESS STEEL
	VT2060	6 X 6 IN SQUARE DRAIN SQUARE GRATE RETAIL				MATTE BLACK
	VT32060	6 X 6 IN SQUARE DRAIN SQUARE GRATE MATTE BLACK				STAINLESS STEEL
	VT1060	6 X 6 IN SQUARE DRAIN TILE-IN GRATE RETAIL			TILE-IN	STAINLESS STEEL
	VT32060BG	6 X 6 IN SQUARE DRAIN SQUARE GRATE BRUSHED GOLD			SQUARE	BRUSHED GOLD
	VT32060GM	6 x 6 IN SQUARE DRAIN SQUARE GRATE GUNMETAL GRAY				GUNMETAL GRAY