

AOSTIRMOTOR

Manual

A30

750W




POWER BRINGS JOY

sales5@focus-furniture.com



Product Description

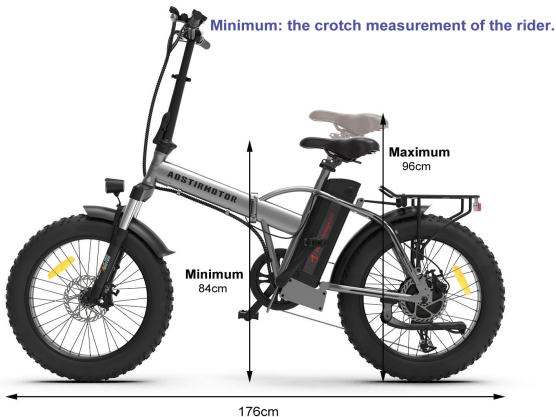

Tools necessary to accomplish assembly and adjustment



Frame	6061 aluminum alloy	Battery	48V 12.5Ah Lithium Battery
Motor	750W Motor	Controller	48V 20Ah
Charge Time	4-6 hours	Max Speed	40 km/h
Range Distance	30-45 km	Brake	F/R disc brake
Light	With front light	Display	S866-LCD display
Fork	Spring Front Suspension	Tire	20x4.0
Derailleur	Outer 7 speed SHIMANO	Packing Size	140*28*68cm

Safety Notice


To Ensure Your Safety, Make the Following Functional Checks Before Driving:

1. Test brake system, throttle, and power system.
2. Tire pressure should be at 30 psi.
3. Check front wheel lug-nuts, securely tighten before every ride.
4. Battery charge level- found on side of battery.
5. **Operation of Brake and gear:** Check whether there is friction with the frame during rotation and abnormal noise. Adjust the distance and parallelism through screws.
6. **Operation cautions concerning wet weather and night-time:** bicycles are partially waterproof, but for safety reasons, it is not recommended to ride on heavy rain; for night rides, please turn on the headlights and use them in a safe state.
7. **Operation Guide for safe on-and-off road :** The bicycle frame is made of aluminum alloy, the overall structure is stable, and the strength is high. However, for your safety, please wear protective gear and make relevant safety preparations on rugged roads or off-road conditions.

• Installation Instructions •




①




②



③



④



⑤



⑥



⑦



⑧


1. Open your package.
2. Take out the tool box.
3. Take out the bicycle from the package and put it on a soft surface to avoid scratches.
Cut the tie that secures the front wheel to the side
4. Remove the protective foam.
5. Open the accessory kit and remove the tool kit
6. Invert the bicycle.
7. Remove the large fixing bolt on the front fork.
8. Put the front wheel on the front fork and place the disc brake pad on the front wheel in the middle of the disc brake caliper(Figure 1).
9. Use the supplied 15mm flat tool to tighten the two bolts.
10. Tie the key to the handlebar clamp, cut the zipper, and then use the Allen wrench in the tool kit to remove the clamp.
11. Place the handlebar in the middle position (Figure 2), install the rod clamp and tighten the screws with the included Allen wrench.
12. Install the LCD-display on the handlebar (Figure 3), tighten the screws, and connect the green connecting wire (Figure 4)
13. Grasp the bicycle light and unscrew the lens. Then, remove the plastic insulator, re-tighten the lens, and then connect the red cable (Figure 5), and connect the bicycle light to the screw above the front fork (Figure 6).
14. Install the pedal. The right pedal rotates clockwise (Figure 7), and the left pedal rotates counterclockwise (Figure 8). **NOTE: Pedal mark "L" means left and "R" means right.**
15. Vertical bicycle
16. Push the seat into the column, fix it in the desired position, tighten the screws, and then fix it.
17. Installation is complete. **When connecting meters, headlights, brake circuit breakers, handlebars, etc., please align them and do not install violently(Figure 4).**

Assembly instructions for accomplishing complete and proper assembly.

• Folding Steps •




1. Fold the pedal, hold both sides of the pedal with both hands, shrink and fold inward



2. Fold the front and lift up the front handle




3. Push the lock switch outwards, hold the handle and fold inward immediately



4. Fold the body, push the lock switch upwards, and then turn the switch clockwise



5. Hold both sides of the body and fold inward



6. Fold the seat cushion, lift the switch under the seat cushion and grab the seat cushion, lift up to fold the seat cushion, turn the battery key counterclockwise to unlock the battery, and take out the battery





7. After folding, you can easily put A20 in your car trunk or put it at home, which will save your space even more

Display Use & Maintenance

S866-LCD display

Appearance and dimensions




1 Function overview and functional area layout

1.1 Function overview




Display YL81C provides a variety of functions to meet the riding needs of users, including:

- Battery level indicator
- Assist level adjustment and indication
- Headlight indicator
- Speed indicator (including real-time speed, maximum speed (MAXS) and average speed (AVG))
- Distance indicator (including ODO and trip distance (Trip))
- Error code indicator
- Bluetooth connection indicator (reserved)
- Parameter setting function

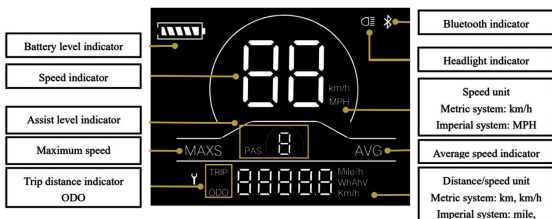1.2 Functional area layout





1.3 Button definitions

There are three buttons on the operating unit of display YL81C, i.e., the on/off button  , plus button  and minus button  .


2 General operation


2.1 Power on/off

By pressing and holding the button  , the display will start to work and the working power supply of the controller will be turned on. In the power-on state, by pressing and holding the button  , your e-bike will be powered off. In the power-off state, the display will no longer use the battery power, and its leakage current will be less than 1uA.


If your e-bike is not used for more than 10 minutes, the display will be automatically powered off.

2.2 Display interface

After the display is turned on, the display will show the real-time speed (km/h) and the trip distance (km) by default. By pressing the button  , the information displayed will be switched between the trip distance (km), ODO (km), maximum speed (km/h) and average speed (km/h). When the distance reaches 9999.9 km, it will be automatically reset to zero.



Controller Use & Maintenance



- ① Battery negative connection line
- ② Battery positive connection line
- ③ Phase line
- ④ Tail light wire
- ⑤ Integrated main line
- ⑥ Power sensor line
- ⑦ Motor Hall plug wire

1. Please be careful not to get water into the controller box
2. When the bike does not work: 1)Check the connection of controller cables;
2) Try to restart or Replace the controller; 3)Contact us with email

Maintenance

- 1.Maintenance of the brake:** Check whether there is friction with the frame or abnormal noise during rotation, and adjust the distance and parallelism through screws. Regularly check the wear of the brake pads, replace the brake pads from time to time, and keep the brake discs clean.
- 2.Maintenance of Control cables:** Lightly hold the brake (difficulty, one-finger gap), check whether the handbrake is too loose, tighten, or ride test.
- 3.Maintenance of Bearing adjustment:** After riding the bicycle for a period of time, please check the fastening of the front and rear wheel fixing bolts from time to time, re-warp the bolts in time, and ensure that the front and rear wheel bearings are parallel and correct.
- 4.Maintenance of Wheel adjustment:** Check the tire pressure from time to time and always maintain 30 psi.
- 5.Maintenance of Lubrication:** Lubricate the chain, brake disc and other parts, always remove all debris, dust and dirt/sand
- 6.Maintenance of Reflector:** None
- 7.Maintenance of Tires:** Regularly check the wear and tear of the tires and replace them regularly. Check the tire pressure and always maintain 30 psi.
- 8.Maintenance of Handlebar:** For handlebar installation, please strictly follow the assembly instructions to ensure center alignment, firmness and reliability.
- 9.Maintenance of Seat adjustment:** The height of the bicycle seat can be adjusted by the tightness of the seat tube clamp, and the adjustable height is 12cm.
- 10.Maintenance of Handlebar:** Check whether the speed display of the meter is abnormal, keep the maximum handlebar, and check the upper limit of the maximum speed;
- 11.Maintenance of Derailleur:** Do not use it in a stationary state. In a rotating state, adjust it twice through the transmission. Whether the chain moves smoothly. The transmission has 7-speed and 9-speed.

FAQ

• Is there a power usage or battery gauge on the bike?

Yes, there is a full screen LCD display. There is also an additional LED battery gauge on the side of the battery pack. 2x the info!

• Is there a switch to prevent accidental starting?

Yes, there is an on/off button on the battery pack. The brake levers also come standard with a safety power stop switch built in.

• How do I lock it up and what can I do to help minimize the chance of it being stolen?

AOSTIRMOTOR Bike has some great anti-theft features, including a locking battery rack with keys to keep bike safe, and rear wheel which is bolted down reduce the chances to be stolen.

Most standard U-locks and cable locks work fine on our AOSTIRMOTOR Ebike.

• Does it work in the rain?

The components are all waterproof and work very well in wet conditions, But we do not suggest to use our ebike in a rain day.

We suggest that you should keep your bike parked indoors and keep him in a dry situation.