




## INSTALLATION INSTRUCTIONS



INSTALL COUPLING HALF (SOCKET)  
ON GAS SUPPLY LINE IN ACCORDANCE  
WITH NFPA54/ANSI Z223.1 FUEL GAS CODE.

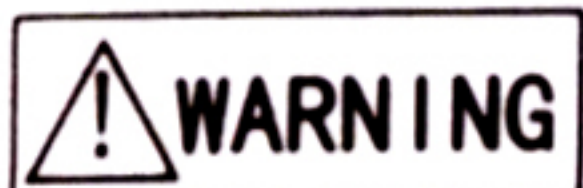

PRIOR TO INSERTING PLUG TEST THE CONNECTION  
FOR LEAKS ONLY WITH LEAK TEST SOLUTION.  
RINSE WITH CLEAN WATER AFTER LEAK TEST TO  
REMOVE ANY CORROSIVE RESIDUE.  
DO NOT USE OPEN FLAME TO TEST FOR LEAKS.

## OPERATION INSTRUCTIONS

To connect—push back sleeve  
of socket (FIG. 1).




Insert Plug (FIG. 2). release  
sleeve.

Push Plug until sleeve snaps  
forward locking Plug in Socket  
(FIG. 3).

(THIS TURNS ON GAS  
AUTOMATICALLY)

To disconnect: Push sleeve  
back and pull out plug

(THIS AUTOMATICALLY SHUTS  
OFF GAS)

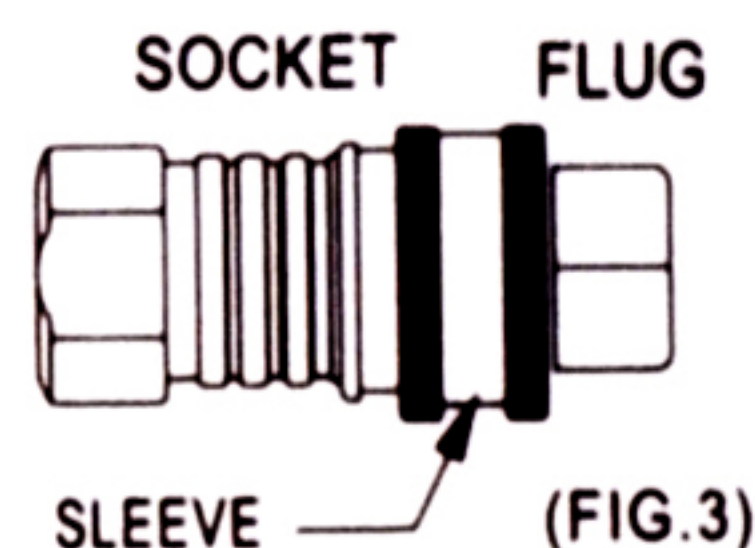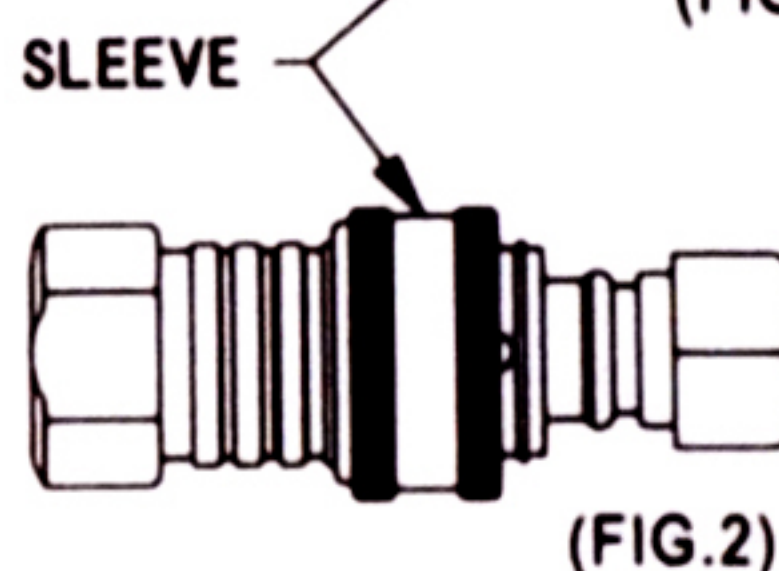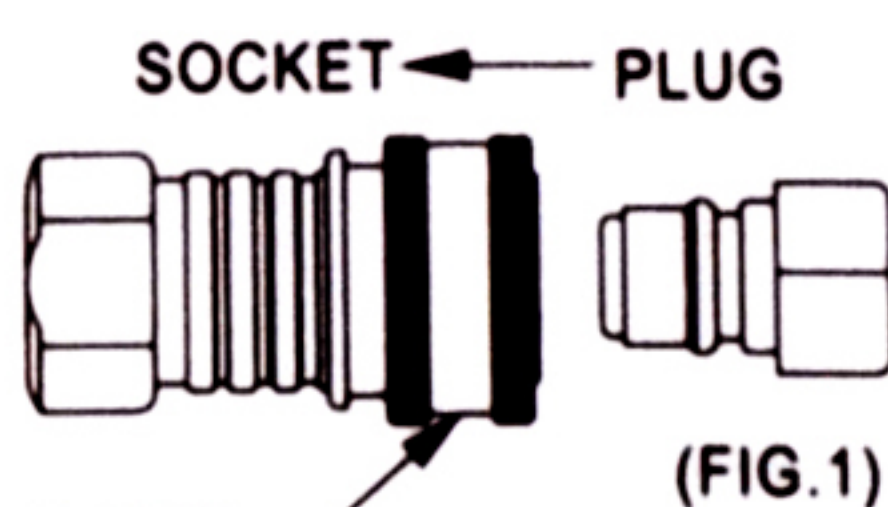

  
C US  
IMPORTANT