




3696TRM  
Tub/Shower/Hand Shower Trim  
**Specification Submittal**

Location:



**Model Numbers**

- 3696TRM**  
Tub/Shower/ Hand Shower Trim

**Valve Options:**

- 261 Series Temptrol Shower Valve with TRM modifier
- 161 Series Temptrol Shower Valve requires TC modifier
- 3DIVBODYSR

**Feature Highlights**

- Duro Tub/Shower/Hand Shower Trim.
- Requires Temptrol® Pressure Balancing Tub/Shower Valve.
- Requires Symmons Triple Outlet Diverter Valve.
- Metal lever handle.
- 30" slide bar for hand shower wand.
- Dual checks for backflow protection
- 60" flexible metal hose.
- 5-5/8" square tub spout.
- Single mode hand shower wand with NPSO.
- Single mode showerhead.
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetal construction, plated in standard polished chrome finish.

**Compliance**

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 1.75 gpm(6.6 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation




**Options/Modifications**

- 15** **CG** 1.5 gpm (5.7 L/min) flow restrictor
- 175** 1.75 gpm (6.6 L/min) flow restrictor
- BBZ** Brushed Bronze finish
- MB** Matte Black finish
- STN** Satin Nickel finish
- L1** Less showerhead
- L2** Less hand shower
- L3** Less showerhead and hand shower
- L5** Less hand shower system
- L7** Less handle
- TC** Test Cap Trim (includes TA-10&T-12A) used with 161 series Temptrol Shower Valve

**Warranty**

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.

**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



**SKU Builder**


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
3696	STN		15	TRM		3696STN15TRM
3696	MB	L3		TRM	TC	3696MBL3TRMTC

**Note:** No more than two modifiers (L1-L7) and modifier order will follow numerical order.

**Architectural/Engineering Specification**

Symmons Duro Tub and Shower and Hand Shower Trim \_\_\_\_\_ Includes Duro Tub and Shower and Hand Shower Trim powered by Temptrol® Pressure Balancing Shower Valve. Features metal lever handle, 30" slide bar for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, 5-5/8" square tub spout, single mode hand shower wand with NPSO, single mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year Commercial Warranty. Lever handle meets ADA requirements for operation. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), and 2.0 gpm (7.6 L/min) compliant. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "175 - 1.75 gpm (6.6 L/min) flow restrictor", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish", "L1 - Less showerhead", "L2 - Less hand shower", "L3 - Less showerhead and hand shower", "L5 - Less hand shower system", "L7 - Less handle", and "TC - Test Cap Trim".

## Dimensions

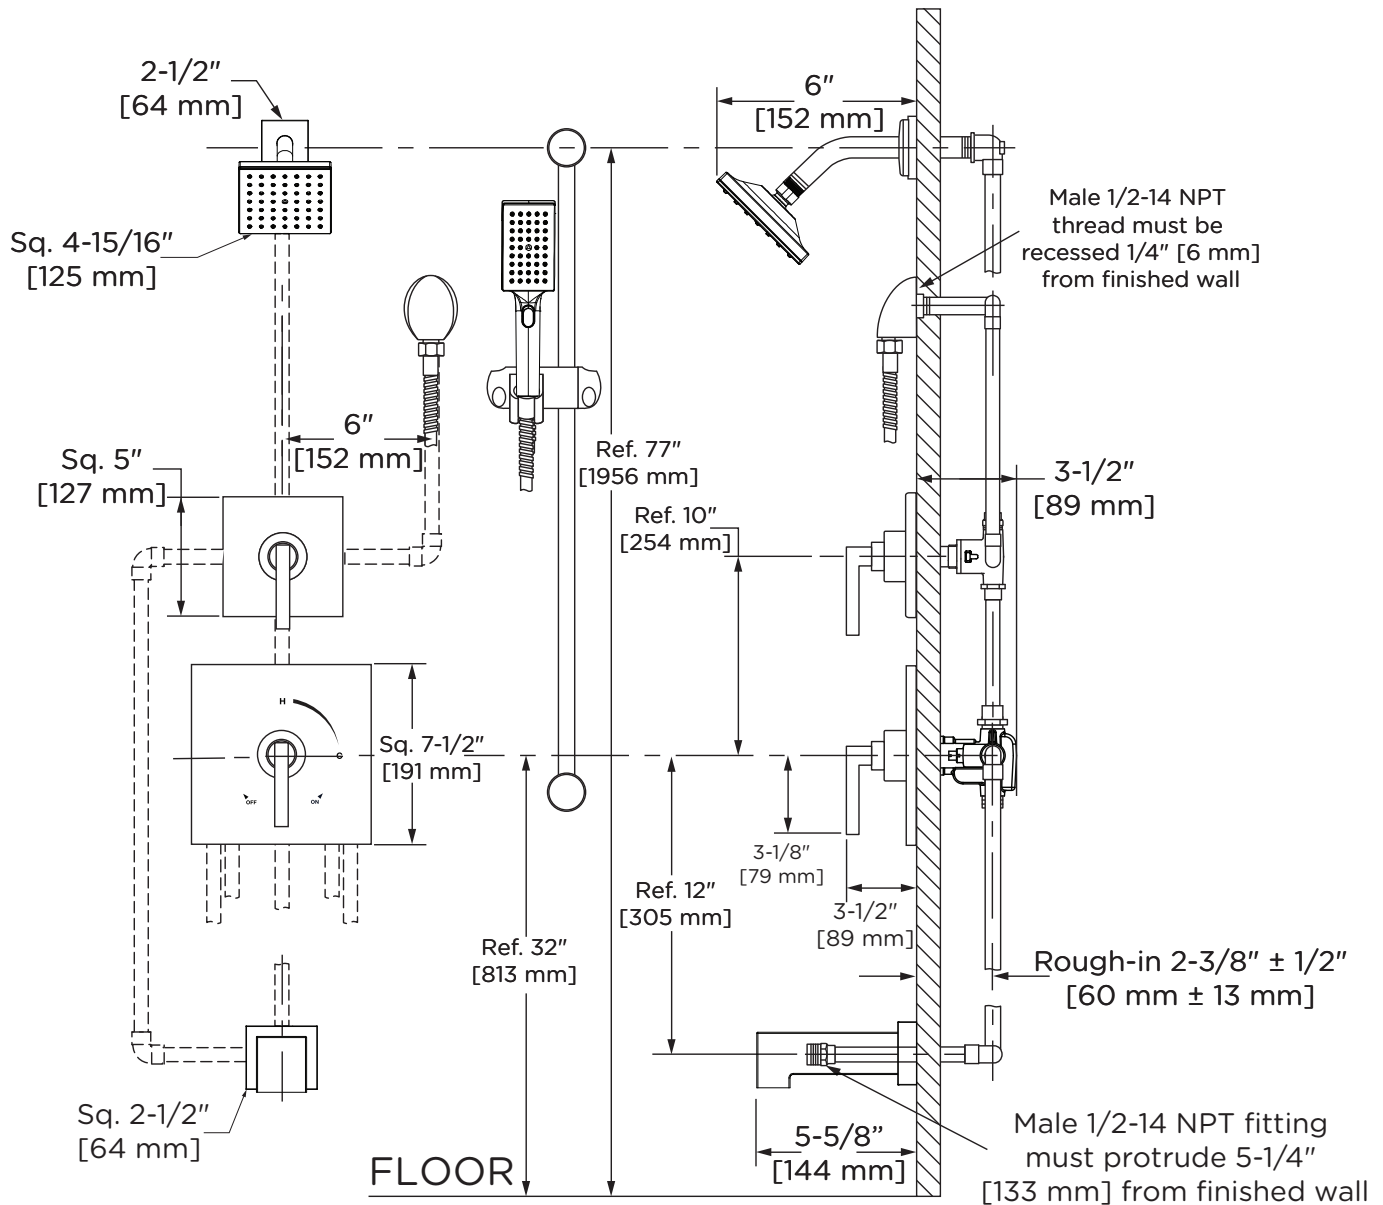

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.