

# Fuzion™ 7260

## WHIRLPOOL BATH UNDERMOUNT, SINGLE WITH CHROMATHERAPY

EG40 Fuzion™ 7260 Whirlpool UM—Single Left-hand motor

EG10 Fuzion™ 7260 Whirlpool UM—Single Right-hand motor


# Fuzion™ 7260

## WHIRLPOOL BATH UNDERMOUNT, SINGLE WITH ILLUMATHERAPY™

EG55 Fuzion™ 7260 Whirlpool UM—Single Left-hand motor


EG25 Fuzion™ 7260 Whirlpool UM—Single Right-hand motor

- Center Drain Location
- Drain and Overflow supplied
- Accessories / Hardware:
  - Optional wood frame in teak or wenge finish #GU08
  - TheraPro™ Jet Rings Kit: #D095
  - AccuPro™ Jet Rings Kit: #P556 (6 required)
- Trim Kit Finishes Available:
  - (827) – Chrome
  - (898) – Brushed Chrome
  - (815) – Satin Nickel
  - (829) – Bright Brass
  - (805) – Platinum
  - (826) – Brushed Nickel
  - (845) – Oil Rubbed Bronze

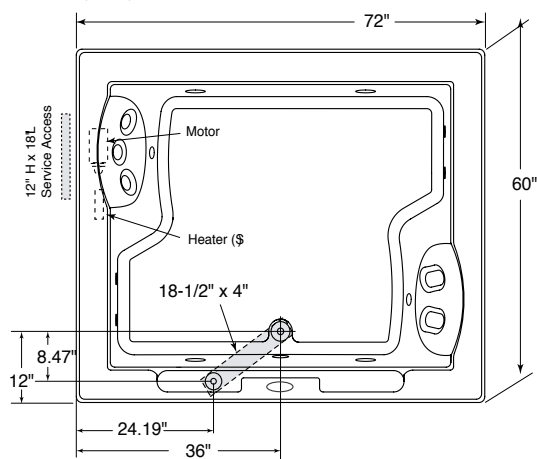

**Product Shown: Fuzion™ 7260 Whirlpool Bath Undermount with Illumatherapy Single Right Hand Motor Model: EG25**

\* Measurements inside unit represent cutout in floor to allow for drain/overflow. Minimum Service Access dimensions given.

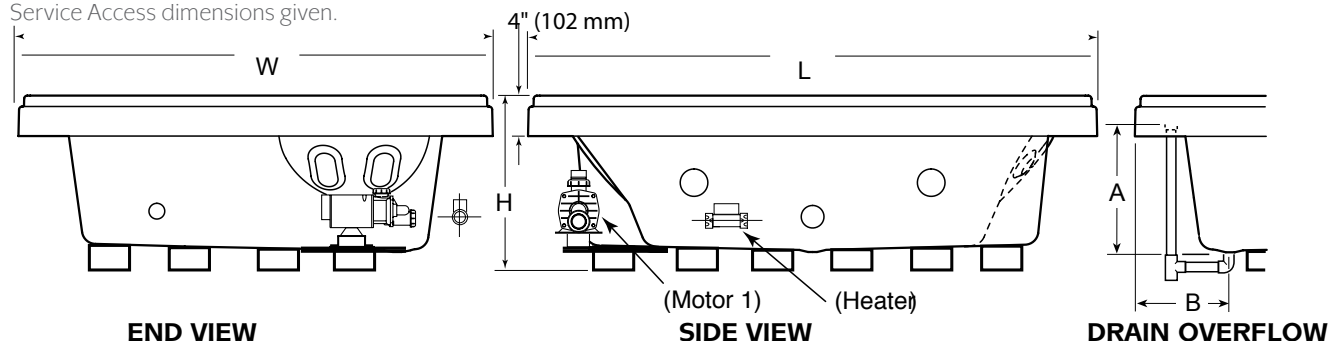

### INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## Technical Specifications

### DIMENSIONS

72" L x 60" W x 21 1/2" H  
(1829 mm) L x (1524 mm) W x (546 mm) H

### DRAIN/OVERFLOW

A: 16-3/4" (425 mm) B: 12-1/16" (306 mm)

### CUTOUT

Template provided. PN: DD44000

### OPTIONAL DIY (DO-IT-YOURSELF) FRAME

Drawing provided. PN: DE56000

(Drawing comes with tub. Additional copies can be requested.)

### TOTAL WEIGHT

1730 lb. (785 kg) / 57.6 lb/ft<sup>2</sup> (281 kg/m<sup>2</sup>)

### OPERATING GALLONAGE

129 U.S. Gal. (488 Liters)

### PRODUCT WEIGHT

199 lb. (90 kg)

### SKIRT MOUNTING

Not Available

### ELECTRICAL SPECIFICATIONS

**Requires a dedicated GFCI protected separate circuit.**

Motor/Pump: 120 VAC, 20 AMP, 60 Hz.

RapidHeat™: 120 VAC, 15 AMP, 60 Hz.

### HEATER (STANDARD)

RapidHeat™: P/N S750000

### Faucet Installation Note:

The combined thickness of the tub shell and optional frame is 1.75".

Care should be taken to select a faucet that will accommodate this thickness.