



Buy it for looks. Buy it for life.®

## Specifications

### DESCRIPTION

- Various finishes identified by suffix
- Handheld shower
- 69" double interlock spiral hose (metal)
- Double check valves in handshower
- 30" slide bar with push button height selection

### OPERATION

- 4-function: massage, vigorous, full and combination: rotate outer ring to select
- Handshower holder rotates to adjust angle of hand shower

### FLOW


- EP suffix models are limited to 2.0 gpm (7.6 L/min) at 80 psi

### STANDARDS

- Designed and manufactured to comply with the applicable requirements of ASME A112.18.1/CSA B-125.1 and ASSE 1014 and all applicable specifications referenced therein
- EP suffix models are third party certified to WaterSense®


### WARRANTY

- Lifetime limited warranty against material or manufacturing defects

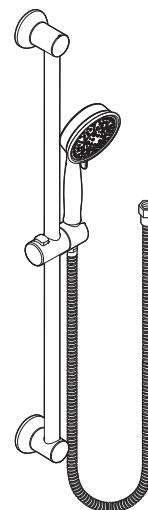

### 4-Function Massaging Handshower w/Slide Bar

Models: 3667EP series

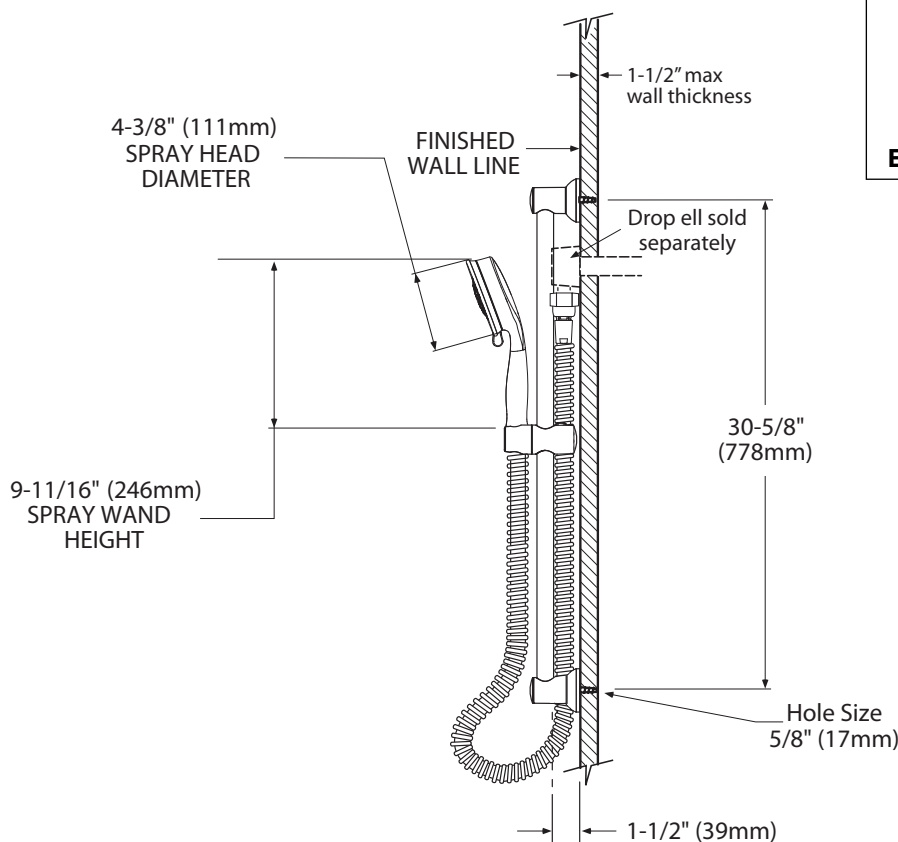

### CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

[www.moen.com](http://www.moen.com)



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes 7" rainshower showerhead, arm, flange and tub spout

## OPERATION

- Flow lever operates counterclockwise through a 90° arc with off at 6 o'clock and maximum flow at the 3 o'clock position. Shut off in clockwise direction
- Temperature lever operates through a 340° arc with maximum cold at full clockwise rotation and maximum hot at full counter clockwise rotation
- Factory established temperature range from 70°F (21°C) to 120°F (49°C)
- Safety stop preset at 105°F (41°C)
- Safety stop over-ride allows maximum 120°F (49°C)

## FLOW

- Showerhead limited to 2.5 gpm (9.5 L/min)

## CARTRIDGE


- 130156 thermostatic cartridge design with nonmetallic/nonferrous materials
- 130157 ceramic disc cartridge design

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including ASSE 1016

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


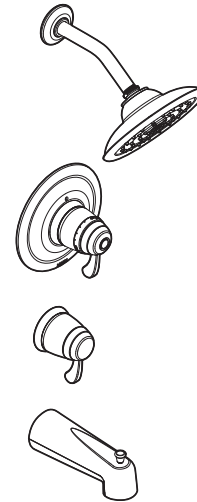


## ExactTemp® 3/4" Thermostatic Tub/Shower (Trim Only)

### Models:

TS3411 series - valve trim only  
TS3400 series - shower trim only  
TS3450 series - tub/shower trim only

**Valves:** S3371, S3600  
(Sold separately)

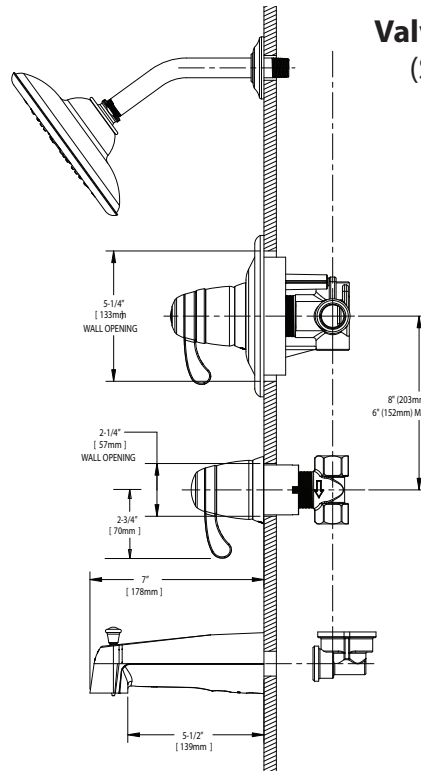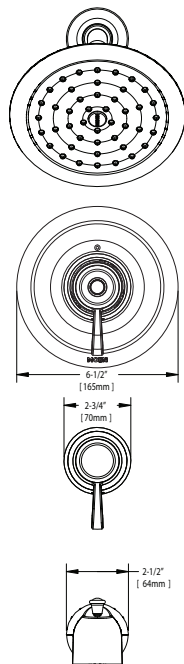

## CRITICAL DIMENSIONS

(DO NOT SCALE)



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Metal construction with various finishes identified by suffix

## OPERATION


- Lever style handle operation

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein



## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



## MOEN® Single Function Flow Valve Trim

**Models:** TS3600 series

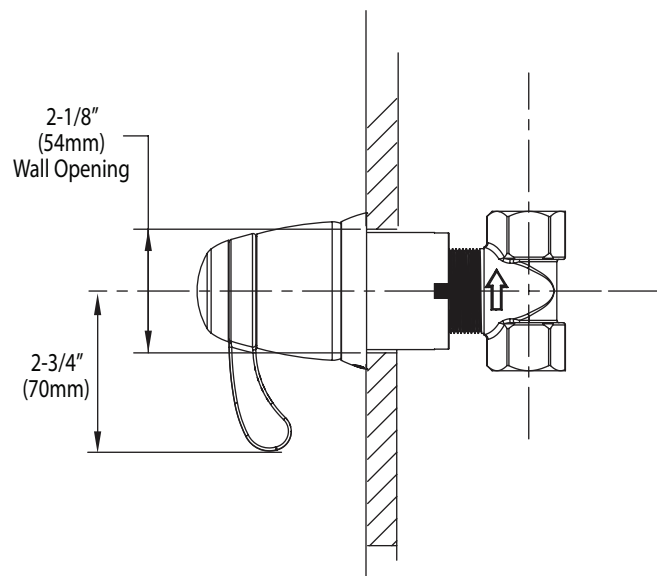

## CRITICAL DIMENSIONS

(DO NOT SCALE)

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

**[www.moen.com](http://www.moen.com)**



Buy it for looks. Buy it for life.®

## Specifications

### DESCRIPTION

- Single function spray with various finishes identified by suffix
- Immersion technology

### OPERATION

- Spray face tilts 20 degrees in any direction

### FLOW


- Designed to deliver 2.0 gpm max (7.6 L/min) at 80 psi

### STANDARDS

- Third party certified to ASME A112.18.1/ CSA B125.1, and all applicable requirements referenced therein

### WARRANTY

- Lifetime limited warranty against leaks and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations





### Single Function Body Spray

**Models:** TS1322 series

**Rough-In:** S1300

**1" Extension Kit:** 155656  
(available separately)

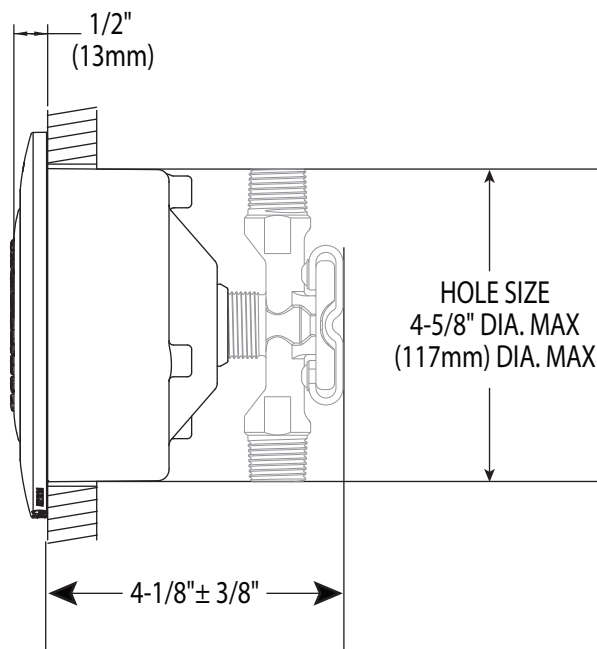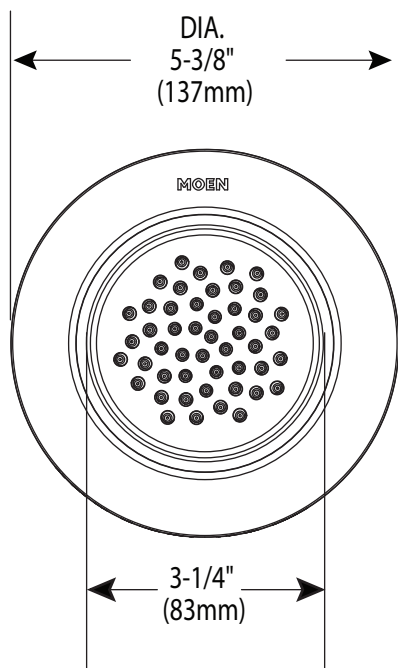

### CRITICAL DIMENSIONS

(DO NOT SCALE)



*Buy it for looks. Buy it for life.®*


## Specifications

### DESCRIPTION

- Metal construction with chrome plated, antique nickel, antique bronze, LifeShine® brushed bronze, LifeShine® brushed nickel, LifeShine® hammered nickel, nickel, oil rubbed bronze, LifeShine® polished brass, platinum, pewter, LifeShine® satine, glacier or wrought iron finishes


### WARRANTY

- Warranted for one year against material or manufacturing defects




**DROP ELL**

**Models:** A725, A725AN, A725AZ, A725BB, A725BN, A725HN, A725NL, A725ORB, A725P, A725PM, A725PW, A725ST, A725W, A725WR

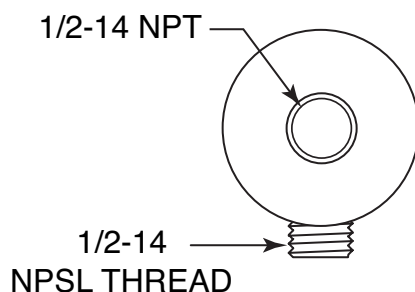

BACK VIEW

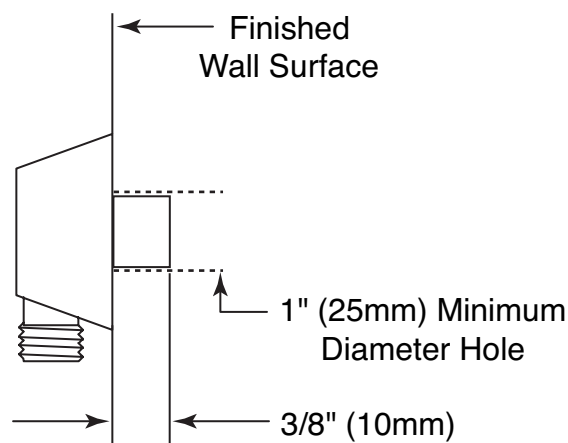

SIDE VIEW

### CRITICAL DIMENSIONS

(DO NOT SCALE)

## DESCRIPTION

- Brass construction
- 3/4" IPS connections
- 13 gpm @ 60 psi

## OPERATION

- Flow lever operates counterclockwise through a 90° arc with off at 6 o'clock and maximum flow at the 3 o'clock position. Shut off in clockwise direction

## CARTRIDGE

- Ceramic disc cartridge design

## INSTALLATION


- Volume control valve must be installed with the arrow pointing in the water flow direction

## STANDARDS

- Third party certified to meet CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including ASSE1016


## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



## 3/4" Volume Control Valve

**Model: S3600**

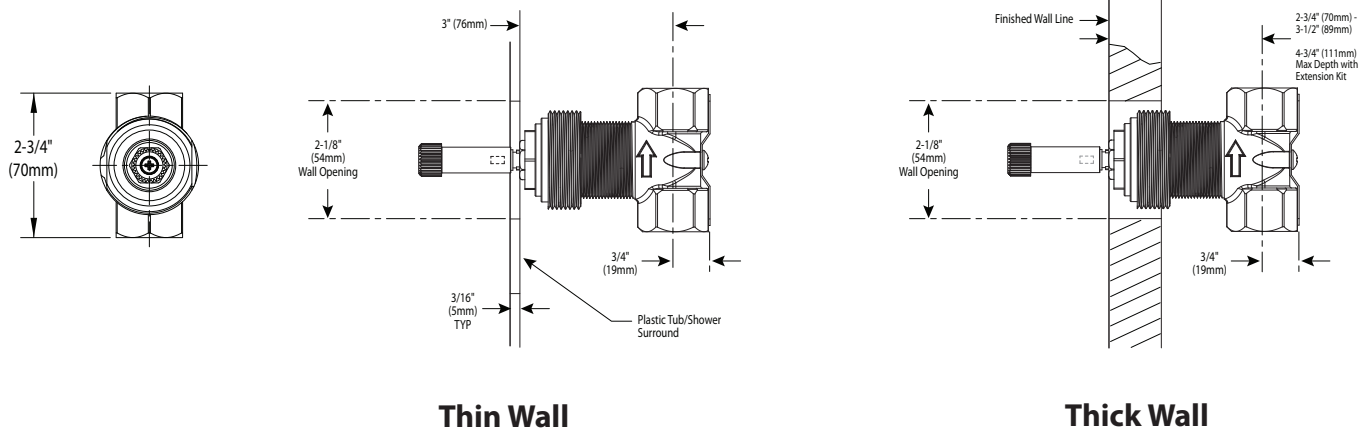

## CRITICAL DIMENSIONS

(DO NOT SCALE)

# Specifications

## DESCRIPTION


- Metal construction
- 1/2" CC and IPS connections
- Includes mounting bracket and test plug

## STANDARDS

- Third party certified to ASME A112.18.1/ CSA B125.1, and all applicable requirements referenced therein



## WARRANTY

- Lifetime limited warranty against leaks to the original consumer purchaser
- 5 year warranty if used in commercial installations

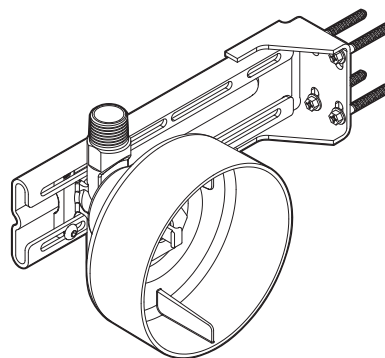

**Body Spray Rough-In**

**Model: S1300**

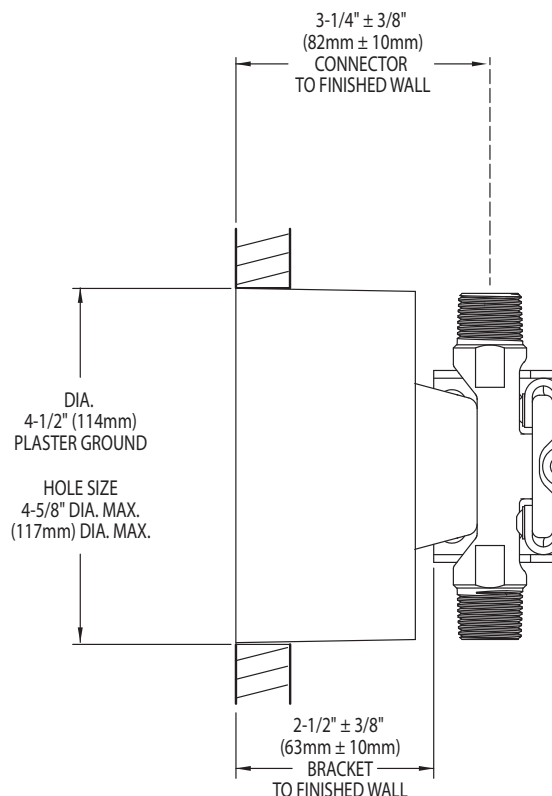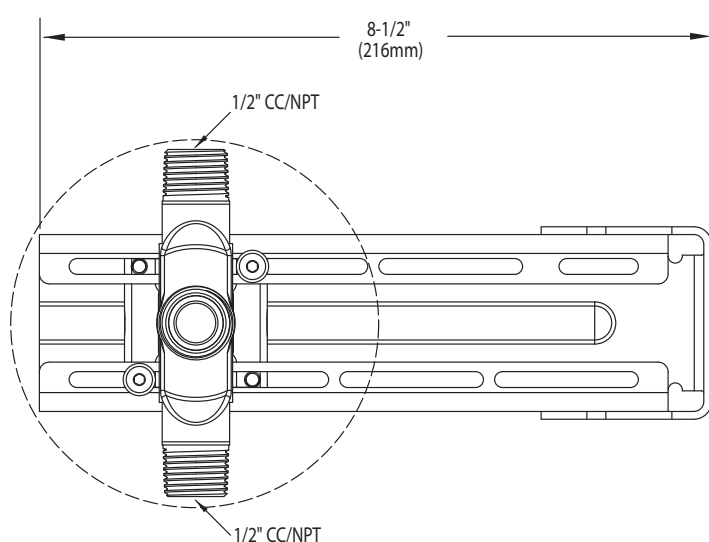

## CRITICAL DIMENSIONS

(DO NOT SCALE)