

4"/6"LED Directional Gimbal Downlight

IMPORTANT: Read all instructions before installing the fixtures. Retain instructions for future reference.

Operating Temperature

- -4°F to 113°F (-20°C to 45°C).
- Suitable for damp locations.
- Suitable for insulated or non-insulated ceiling.
- Air Tight.
- Type IC Rated for direct contact with insulation.

SAFETY: For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be done by a qualified electrician.

WARNING: Make sure the power is OFF from the electrical panel before starting installation or attempting any maintenance.
For indoor installation only.

TOOLS REQUIRED:


- Saw.
- Measuring Tape.
- Wire strippers.
- Screw Driver.
- Electrical Wire (use the right type and gauge suitable to connect to the fixtures).
- Drill w/Hole Saw (optional).



ASSEMBLY INSTRUCTIONS:

1. RISK OF ELECTRICAL SHOCK-Turn off the power before installing, inspecting or removing the fixture.
2. Screw in the E26 light Socket.
3. ① Connect the E26 Socket cable.
4. ② Push Cable in the IDEAL Cable Connector.
5. ③ Install the Light into the Housing.
6. Once assembly is complete, turn on the power to confirm that the fixture is working properly.

4" Housing

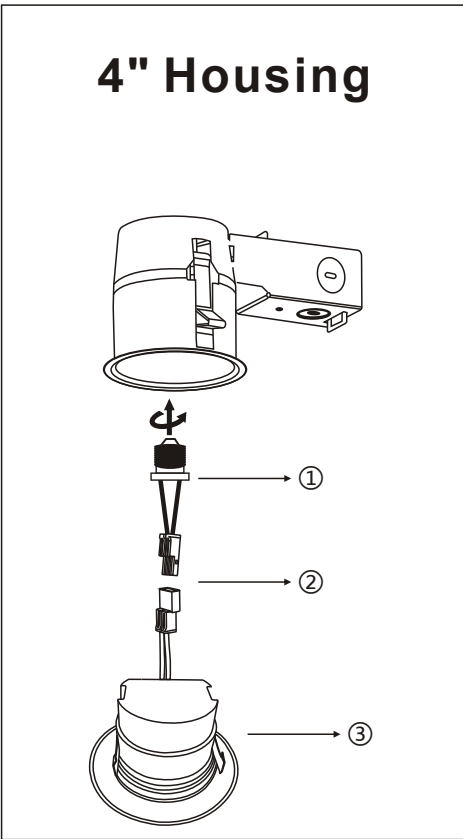

6" Housing

