

OVERVIEW

This 9-watt horizontal magnetic ballast/ballast bypass PL lamp offers a simple and efficient lighting solution to replace existing CFL or fluorescent PL lamps. The soft white, instant-on light is ideal for illuminating spaces, and its 50,000-hour lifespan means less bulb replacement.

Catalog #		Type
Project		
Comments		Date
Prepared by		

KEY FEATURES

- Operation temperature: -4°F - 104°F
- Storage temperature: -4°F - 104°F
- THD: 20%
- Target replacement: 13-18W/GX23
- Direct replacement/ballast compatible: New or existing ballast is required for operation; can work with ballast bypass
- Shatter-resistant



DAMP-RATED



INSTANT-ON



HORIZONTAL INSTALLATION



BEAM ANGLE



50,000 HOURS



ORDERING INFORMATION

SOURCE	WATTAGE	LAMP TYPE	CCT	BASE	ORIENTATION
L = LED Linear	9 = 9W	PL = PL Lamp	35 = 3500K 40 = 4000K 50 = 5000K	GX23-2	H = Horizontal


*See ballast compatibility chart at www.amconservationgroup.com

SPECIFICATIONS


CATALOG #	WATTS	EFFICACY	CCT	LM	CRI	VOLTAGE	PF	HZ	DIM
L9PL40GX23-2H	9W	88 lm/W	4000K	800	≥80	120-277V	≥0.9	60 Hz	No
L9PL50GX23-2H	9W	88 lm/W	5000K	800	≥80	120-277V	≥0.9	60 Hz	No

DIMENSIONS

PRODUCT



CASE

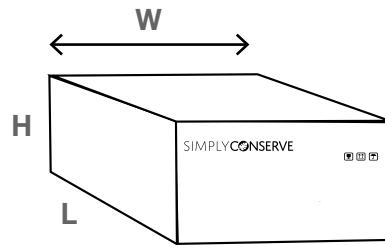

CATALOG #	L	W	BASE
L9PL40GX23-2H	5 50/100"	1 7/20"	GX23-2
L9PL50GX23-2H	5 50/100"	1 7/20"	GX23-2

L	W	H	CASE QTY	GROSS WT
28 37/50"	24 47/100"	21 17/20"	60	8.18 lb.
28 37/50"	24 47/100"	21 17/20"	60	8.18 lb.

5-Year Limited Warranty



If this PL lamp fails to operate for a 5-year period under normal consumer use (6 hours/day, 7 days/week), from the date of purchase or distribution by an energy conservation program and has been properly installed, AM Conservation Group will replace the lamp free of charge.

For warranty claims, please contact:

customer@amconservationgroup.com

To learn more, please visit:

www.amconservationgroup.com