

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers


HARDWARE INCLUDED




Fixture




Decorative Caps




Covers




Shade




Stems



Swivels




Ceiling Plate



Washers A




Washers B



Decorative Nuts



Ball Nut



Mounting Unit




Mounting Screws



Wire Nuts

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS

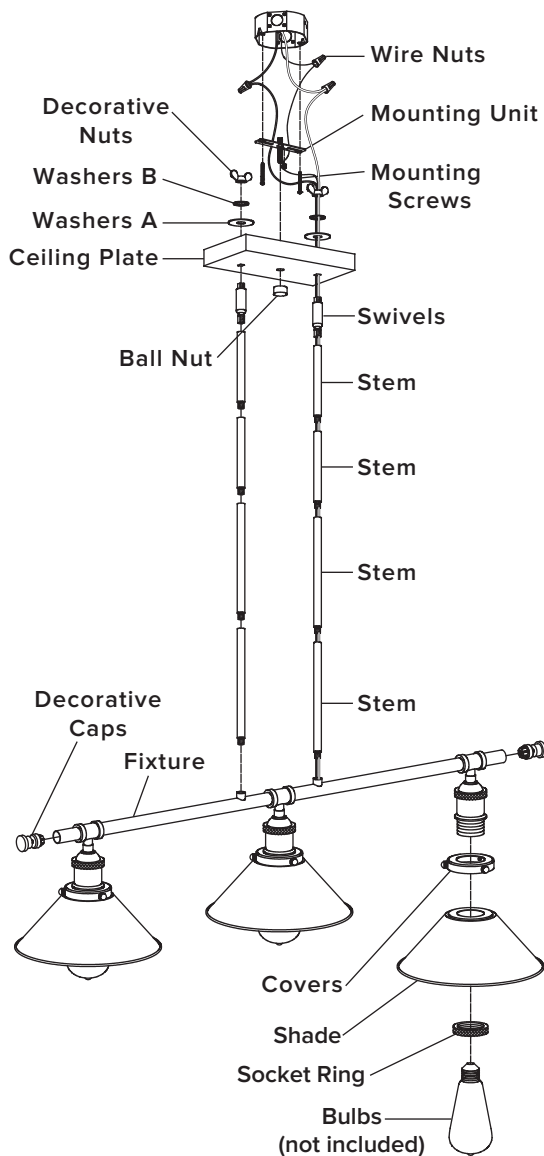

INSTALLATION


STEP 1

Unscrew the **ball nut** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box.

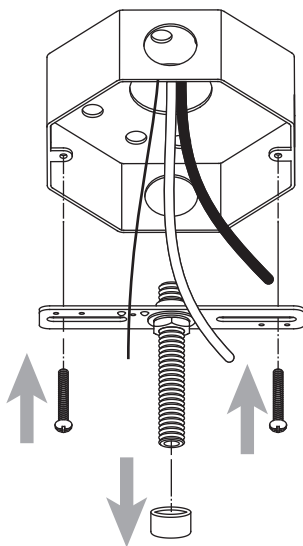




STEP 2

Disassemble the **swivels** under the **Ceiling Plate** by unscrewing **decorative nuts**. Keep the **washers A** and **washers B** for later use.

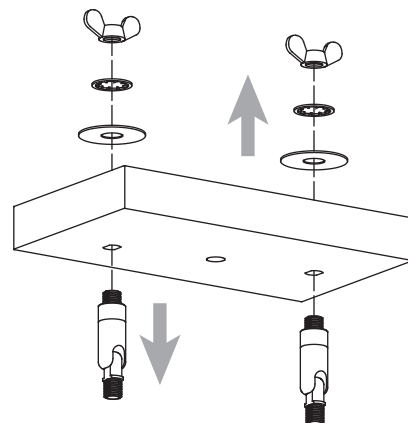

STEP 3

Install **decorative caps** into the **fixture**.

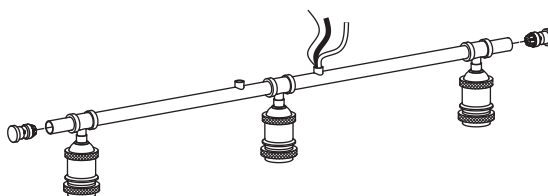


ASSEMBLY INSTRUCTIONS (INSTALLATION)

STEP 4

Weave the fixture wire and fixture ground wire through the **stems** and **swivels**.


Install **swivels** and **stems** into the **fixture**. Install stems based on the desired length of the item on the fixture.

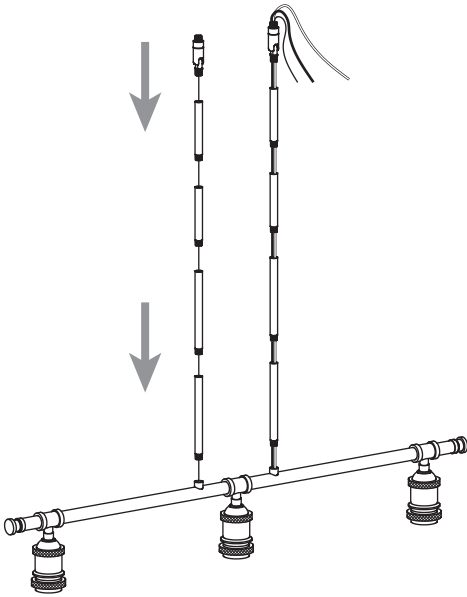

STEP 5


Weave the fixture wire and fixture ground wire through the **ceiling plate**, **washers A**, **washers B** and **decorative nuts**.

Install **swivels** into the **ceiling plate**, and secure with **washers A**, **washer B** and **decorative nuts**.

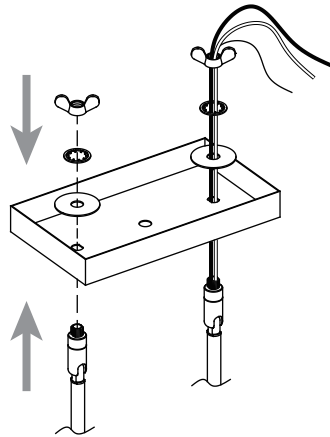

STEP 7


Secure the **fixture** to the **mounting unit** with the **ball nut**.

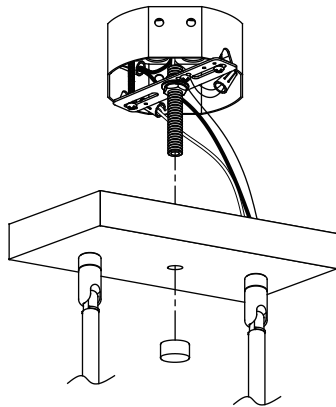

STEP 8

Remove the **socket rings** from the socket.

Attach the **covers** and **shade** onto **fixture** using **socket rings**.

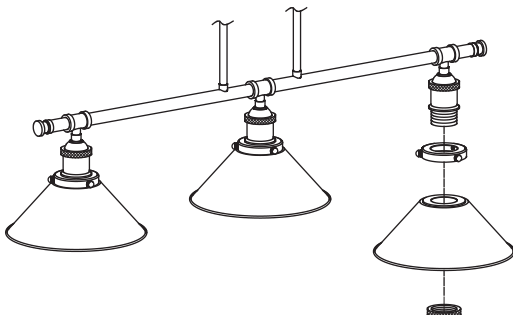

STEP 6

Make the electrical connection from the junction box to the **fixture**.




Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

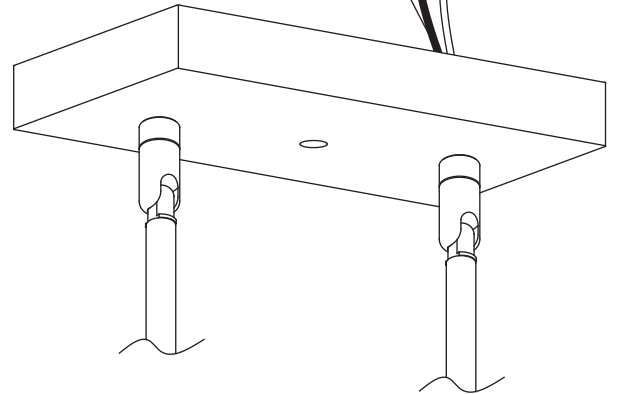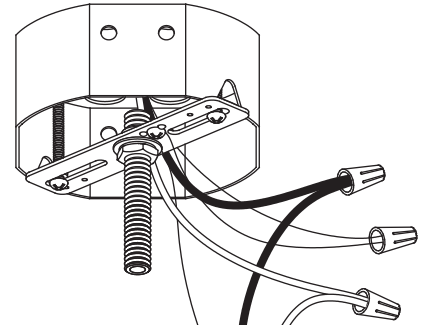

STEP 9

Install bulb (not included)

