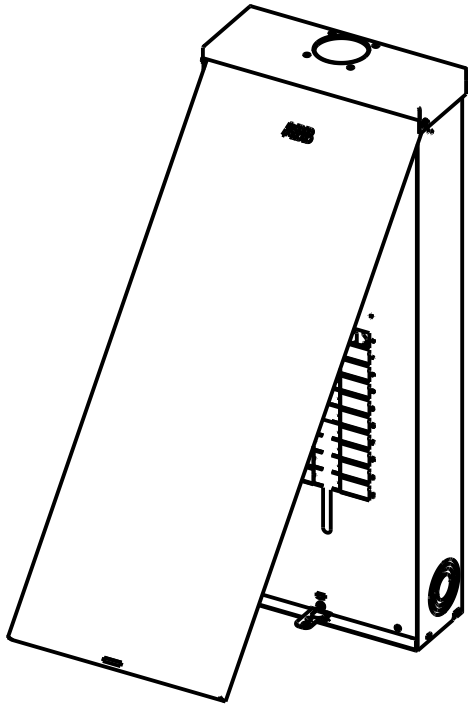
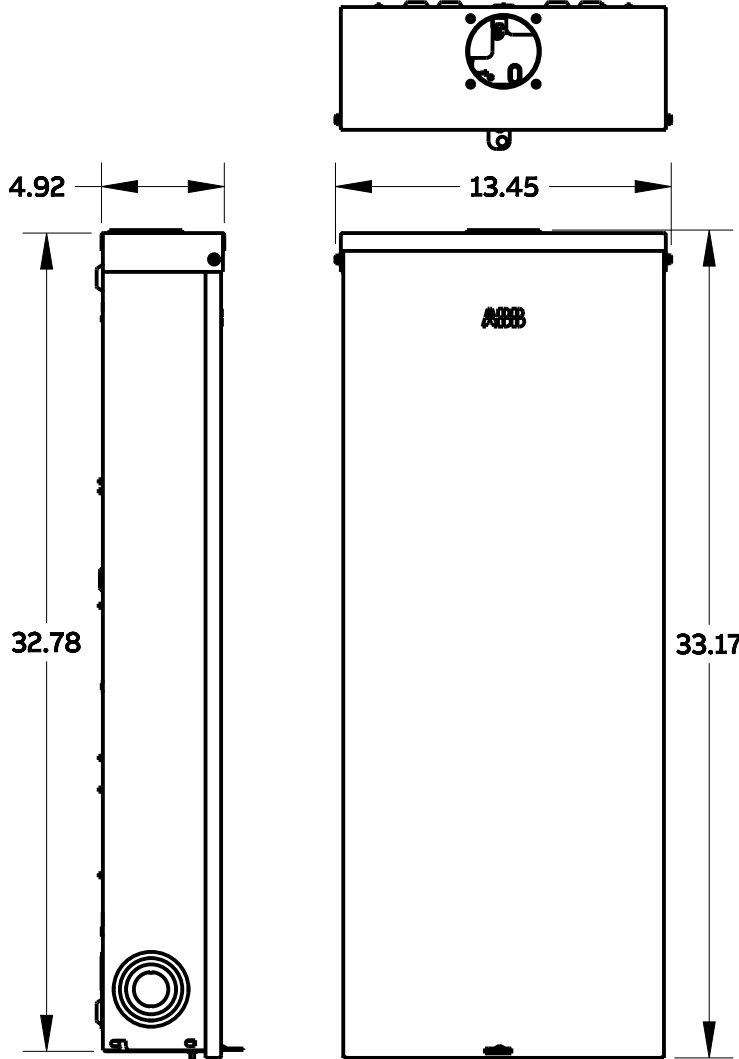
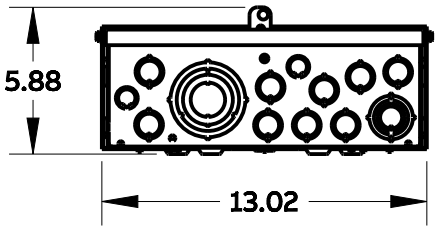
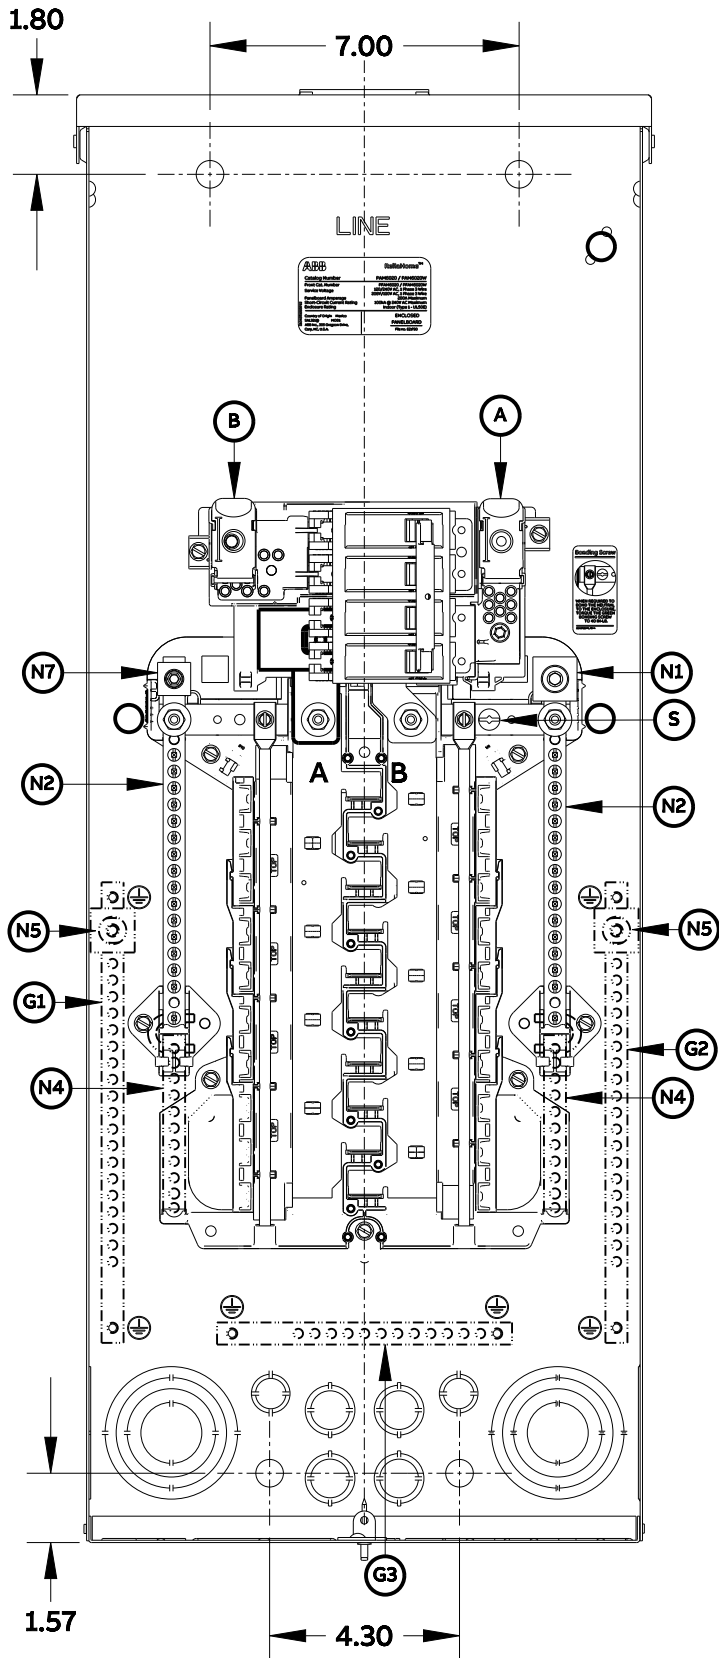


CATALOG		PAM2020R		RAINTIGHT HUBS						REPLACEMENT / ACCESSORIES KIT																																																																																																	
		3/4" Dia.	1" Dia.	1-1/4" Dia.	1-1/2" Dia.	2" Dia.	2-1/2" Dia.			TQLFP1	1" Front Filler plates		--																																																																																														
		TC75	TC100	TC125	TC150	TC200	TC250			PTHQLRK2	Circuit Breaker Hold-down kit END		1TQC163000Z0114																																																																																														
										PTHQLRK1	Circuit Breaker Hold-down kit		1TQC163000Z0113																																																																																														
										PD60	Circuit Directory		1TQC163000Z0115																																																																																														
										THP100	Padlocking - THQL		--																																																																																														
										THP100E	Padlocking - AFCI/GFCI		--																																																																																														
										THQLSURGE2	Type 1 plug-on SPD		--																																																																																														
										THQMV200F	200A Main Circuit Breaker Kit		--																																																																																														
										THQMVSBF	Service Entrance Barrier THQMV		--																																																																																														
										--	--		--																																																																																														
SPECIFICATION <table><tr><td>Service Voltage</td><td>120/240V AC, 1 Phase 3 Wire 208Y/120V AC, 1 Phase 3 Wire</td></tr><tr><td>Panelboard Amperage</td><td>200A Maximum</td></tr><tr><td>Short- Circuit Current Rating</td><td>100kA @ 240V AC Maximum</td></tr><tr><td>Rated Frequency</td><td>60Hz</td></tr><tr><td>Enclosure Rating</td><td>Outdoor (Type 3R - UL50E)</td></tr><tr><td>Main Device</td><td>Circuit Breaker</td></tr><tr><td>Main Device Rating</td><td>200A Maximum</td></tr><tr><td>Busbar Rating and Material</td><td>200A Aluminum</td></tr><tr><td>Branch Circuit Breaker Rating</td><td>125A Maximum</td></tr><tr><td>Sum of Circuit Breaker Rating</td><td>200A Maximum per Stab</td></tr><tr><td>Number of Spaces</td><td>20 Spaces Maximum</td></tr><tr><td>Number of Circuits</td><td>40 Circuits Maximum</td></tr><tr><td>Standard Listing</td><td>UL67 (E21790)</td></tr><tr><td colspan="2">SUITABLE FOR USE AS SERVICE EQUIPMENT</td></tr></table>		Service Voltage	120/240V AC, 1 Phase 3 Wire 208Y/120V AC, 1 Phase 3 Wire	Panelboard Amperage	200A Maximum	Short- Circuit Current Rating	100kA @ 240V AC Maximum	Rated Frequency	60Hz	Enclosure Rating	Outdoor (Type 3R - UL50E)	Main Device	Circuit Breaker	Main Device Rating	200A Maximum	Busbar Rating and Material	200A Aluminum	Branch Circuit Breaker Rating	125A Maximum	Sum of Circuit Breaker Rating	200A Maximum per Stab	Number of Spaces	20 Spaces Maximum	Number of Circuits	40 Circuits Maximum	Standard Listing	UL67 (E21790)	SUITABLE FOR USE AS SERVICE EQUIPMENT																																																																															
		Service Voltage	120/240V AC, 1 Phase 3 Wire 208Y/120V AC, 1 Phase 3 Wire																																																																																																								
		Panelboard Amperage	200A Maximum																																																																																																								
		Short- Circuit Current Rating	100kA @ 240V AC Maximum																																																																																																								
		Rated Frequency	60Hz																																																																																																								
		Enclosure Rating	Outdoor (Type 3R - UL50E)																																																																																																								
		Main Device	Circuit Breaker																																																																																																								
		Main Device Rating	200A Maximum																																																																																																								
		Busbar Rating and Material	200A Aluminum																																																																																																								
		Branch Circuit Breaker Rating	125A Maximum																																																																																																								
Sum of Circuit Breaker Rating	200A Maximum per Stab																																																																																																										
Number of Spaces	20 Spaces Maximum																																																																																																										
Number of Circuits	40 Circuits Maximum																																																																																																										
Standard Listing	UL67 (E21790)																																																																																																										
SUITABLE FOR USE AS SERVICE EQUIPMENT																																																																																																											
																																																																																																											
TORQUE <table><tr><th>Terminal#</th><th>Terminal Name</th><th>Installed/ Cat.Number</th><th>Wire Size</th><th>Drive</th><th>Torque LB-IN</th></tr><tr><td>A & B</td><td>Main Circuit Breaker</td><td>Factory Installed</td><td>#1 – 250 Cu; 2/0 – 250 Al</td><td>Internal Hex</td><td>200</td></tr><tr><td>N1</td><td>Neutral Lug</td><td>Factory Installed</td><td>(1) #1-300 Cu/Al</td><td>Internal Hex</td><td>200</td></tr><tr><td>N7</td><td>Neutral Lug</td><td>Factory Installed</td><td>(1) #6-2/0 Cu/Al</td><td>Internal Hex</td><td>120</td></tr><tr><td>N2</td><td>Neutral Bar</td><td>Factory Installed</td><td rowspan="5">See Below for Table 1</td><td></td><td></td></tr><tr><td>N3</td><td>Neutral Bar</td><td>N/A</td></tr><tr><td>N4</td><td>Neutral Bar</td><td>PNEUXTSM</td></tr><tr><td>G1</td><td>Ground Bar</td><td>TGK24</td></tr><tr><td>G2</td><td>Ground Bar</td><td>TGK24</td></tr><tr><td>G3</td><td>Ground Bar</td><td>TGK12</td><td></td><td></td><td></td></tr><tr><td>G4</td><td>Ground Lug</td><td>N/A</td><td>N/A</td><td>N/A</td><td>N/A</td></tr><tr><td>C & D</td><td>Feed Thru Lug</td><td>N/A</td><td>N/A</td><td>N/A</td><td>N/A</td></tr><tr><td>N5</td><td rowspan="3">Ground/ Neutral Lug</td><td>TNLK20</td><td>(1) #6-2/0 Cu/AL</td><td>Internal Hex</td><td>120</td></tr><tr><td>N6</td><td>N/A</td><td>N/A</td><td>N/A</td><td>N/A</td></tr><tr><td>N5/N6</td><td>TNLK250</td><td>(1) #1-300 Cu/AL</td><td>Internal Hex</td><td>200</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>S</td><td>Bonding Screw</td><td>Installed</td><td>N/A</td><td>Slotted/ Robertson</td><td>40</td></tr></table>														Terminal#	Terminal Name	Installed/ Cat.Number	Wire Size	Drive	Torque LB-IN	A & B	Main Circuit Breaker	Factory Installed	#1 – 250 Cu; 2/0 – 250 Al	Internal Hex	200	N1	Neutral Lug	Factory Installed	(1) #1-300 Cu/Al	Internal Hex	200	N7	Neutral Lug	Factory Installed	(1) #6-2/0 Cu/Al	Internal Hex	120	N2	Neutral Bar	Factory Installed	See Below for Table 1			N3	Neutral Bar	N/A	N4	Neutral Bar	PNEUXTSM	G1	Ground Bar	TGK24	G2	Ground Bar	TGK24	G3	Ground Bar	TGK12				G4	Ground Lug	N/A	N/A	N/A	N/A	C & D	Feed Thru Lug	N/A	N/A	N/A	N/A	N5	Ground/ Neutral Lug	TNLK20	(1) #6-2/0 Cu/AL	Internal Hex	120	N6	N/A	N/A	N/A	N/A	N5/N6	TNLK250	(1) #1-300 Cu/AL	Internal Hex	200	--	--	--	--	--	--	--	--	--	--	--	--	S	Bonding Screw	Installed	N/A	Slotted/ Robertson	40
Terminal#	Terminal Name	Installed/ Cat.Number	Wire Size	Drive	Torque LB-IN																																																																																																						
A & B	Main Circuit Breaker	Factory Installed	#1 – 250 Cu; 2/0 – 250 Al	Internal Hex	200																																																																																																						
N1	Neutral Lug	Factory Installed	(1) #1-300 Cu/Al	Internal Hex	200																																																																																																						
N7	Neutral Lug	Factory Installed	(1) #6-2/0 Cu/Al	Internal Hex	120																																																																																																						
N2	Neutral Bar	Factory Installed	See Below for Table 1																																																																																																								
N3	Neutral Bar	N/A																																																																																																									
N4	Neutral Bar	PNEUXTSM																																																																																																									
G1	Ground Bar	TGK24																																																																																																									
G2	Ground Bar	TGK24																																																																																																									
G3	Ground Bar	TGK12																																																																																																									
G4	Ground Lug	N/A	N/A	N/A	N/A																																																																																																						
C & D	Feed Thru Lug	N/A	N/A	N/A	N/A																																																																																																						
N5	Ground/ Neutral Lug	TNLK20	(1) #6-2/0 Cu/AL	Internal Hex	120																																																																																																						
N6		N/A	N/A	N/A	N/A																																																																																																						
N5/N6		TNLK250	(1) #1-300 Cu/AL	Internal Hex	200																																																																																																						
--	--	--	--	--	--																																																																																																						
--	--	--	--	--	--																																																																																																						
S	Bonding Screw	Installed	N/A	Slotted/ Robertson	40																																																																																																						
When used as service equipment, all unused neutral terminals may be used for equipment ground conductors.																																																																																																											
Table 1 : GROUND/NEUTRAL Bar Terminal Wire size (AWG/KCMIL) & Torque																																																																																																											
Conductor for Ground/Neutral Bar Terminal																																																																																																											
Solid				Stranded		Drive	Torque Lb-In																																																																																																				
CU	AL	CU	AL																																																																																																								
(1) 14	-	(1) 14	-	Slotted/ Robertson	15																																																																																																						
-	(1) 12	-	(1) 12		15																																																																																																						
(1) 12	-	(1) 12	-		20																																																																																																						
(1) 10		(1) 10		Robertson	20																																																																																																						
-	-	(1) 8			40																																																																																																						
-		(1) 6-4		45																																																																																																							
Multiple Conductor for Ground/Neutral Bar Terminal																																																																																																											
(1) 10 & (1) 12	-	-	-	Slotted/ Robertson	30																																																																																																						
(1) 10 & (1) 14	-	(1) 10 & (1) 14	-		30																																																																																																						
(2) 10 & (1) 14	-	-	-		30																																																																																																						
(1) 12 & (1) 14	-	-	-		30																																																																																																						
-	(2) 10 & (1) 12	-	(2) 10 & (1) 12		30																																																																																																						

						ReliaHome™ P - Series							
DRAWING NUMBER						Mod		Rev		Units			
1TQC163300E0097						01		H		Inches			