

One-light Pendant

Ceiling cord mounted • Damp location listed **PROGRESS LED**

Description:

Provide a dramatic architectural lighting design to any space with this LED pendant. A smooth metal beam with a brushed nickel finish suspends from the ceiling to add clean visual interest to minimalist residential or commercial settings. The frame holds a polycarbonate shade in place to complete the design.

Specifications:

- Brushed Nickel (-009) (Plated)
- Aluminum and steel Construction
- Polycarbonate Polycarbonate Diffuser
- The frame holds a polycarbonate shade in place to complete the design.
- A smooth metal beam with a brushed nickel finish suspends from the ceiling to add clean visual interest to minimalist residential or commercial settings.
- Provide a dramatic architectural lighting design to any space.
- Ideal for any hallway, foyer, kitchen, or dining room.
- Perfect for transitional, modern, or contemporary settings.
- Measures 47-1/4-inch width by 1-3/8-inch height.
- Uses one LED bulb that is included (39w max).
- Able to be fully dimmable with dimmable bulbs.
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting Backplate for outlet box included
- 108" of wire supplied
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	39w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	
Lumens/LPW (Delivered)	2900/74 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-30 °C
Warranty	5-year limited warranty
Labels	cETLus Damp location listed
	Meets California Title 24 JA8-2016

P500276-009-30

Images:



Dimensions:

Width: Depth: 1-3/4"
Length: 47-1/4"
Height: 1-3/8"
Overall Ht. W/Wire: 113"

Width: 46.4325"
Height: 0-1/16"

One-light Pendant

Ceiling cord mounted • Damp location listed **PROGRESS LED**

Photometrics:

P500276-009-30


ELECTRICAL DATA P500276-009-30

Input Voltage	120 V
Input Frequency	60 Hz
Input Current	
Input Power	39
Power Factor	
THD	<20%
FCC	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to
Dimming	Yes*

*See Dimming Notes for more information

P500276-009-30

LED Light Engine: 3000 K 90 CRI
System Wattage: 39
Fixture delivered lumens: 2745
Fixture Efficacy: 72.4
Spacing Criteria: 1.25 | 1.19

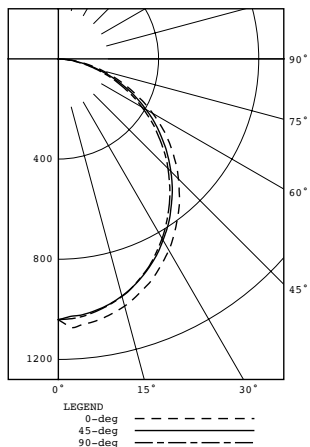

CANDELA DISTRIBUTION

CANDELA	CANDELA	DISTRIBUTION	DISTRIBUTION	DISTRIBUTION	DISTRIBUTION	FLUX
0.0	22.5	45.0	67.5	90.0		
0	1041	1041	1041	1041	1041	
5	1066	1030	1027	1035	1034	98
15	1022	986	980	986	982	279
25	936	902	893	890	888	414
35	818	786	775	766	762	487
45	678	650	635	623	619	493
55	522	498	484	469	466	434
65	347	337	325	308	305	321
75	184	175	165	156	152	176
85	48	42	35	29	29	43
90	0	0	0	0	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	791	28.8
0-40	1278	46.6
0-60	2205	80.3
0-90	2745	100.0
90-180	0	0.0
0-180	2745	100.0

One-light Pendant

Ceiling cord mounted • Damp location listed The Progress LED logo, consisting of the word "PROGRESS" in black and "LED" in orange, both in uppercase, enclosed within a thin circular border.

P500276-009-30

Dimming Notes:

P500276 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Leviton 6672

Lutron NTEVL-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron Caseta Wireless

Lutron AYCL-153P

Lutron TGCL-153-PH-WH

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.