

# Memoirs® Stately

Comfort Height® Two-Piece Toilet K-6669

### **Features**

- Vitreous china.
- Comfort Height® Elongated bowl.
- AquaPiston® flushing system.
- Includes left-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf)
- 2-1/8" fully glazed Concealed trapway.
- 12" (305 mm) rough-in.
- 11-1/8" (283mm) x 8-1/2" (217mm) water area.
- 29-5/8" (752mm) x 18-7/8" (479mm) x 31-7/16" (799mm).
- Clean Caps low-profile bolt caps.

### **Recommended Accessories**

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat K-4108 C3®-230 Elongated Cleansing Toilet Seat K-9167-L Trip Lever K-484 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

## Components

Product includes:

K-4434 Toilet Tank K-5626 Comfort Height Elongated Bowl Additional included component/s: Tank cover, K-9167-L Trip

lever, Bolt cap accessory pack, and Tank accessory pack.





## Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

# **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

### **Available Color/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	7	Black Black™





# **Memoirs® Stately**

Comfort Height® Two-Piece Toilet K-6669

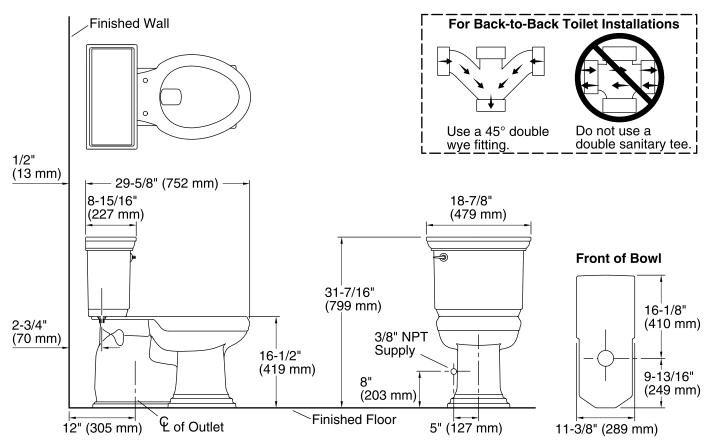

## **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece

Bowl shape: Elongated front

Flush type: AquaPiston® Trap passageway: 2" (51 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11-1/8" x 8-1/2" (283 mm x 216 mm)

Rim to water surface: 5-3/8" (137 mm)

Rough-in: 12

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

